

PRODUCT AND SERVICE GUIDE

EFFECTIVE MARCH 2024

Supersedes October 2020

METROPOLITAN

Ph 08 9493 8800

PerthSales@stramit.com.au

COUNTRY

Ph 1800 218 046

CONTACT US

How can we help you?

Customer Service, Sales and all General Enquiries

To place an order, request a quote, or receive tailored customer support, please contact your local branch.


Check the locations page opposite for the phone number and address of your nearest Stramit branch.

For general enquiries, email contactus@stramit.com.au

For order enquiries, email orders@stramit.com.au

Technical Services

For specification and technical support, email techsupport@stramit.com.au

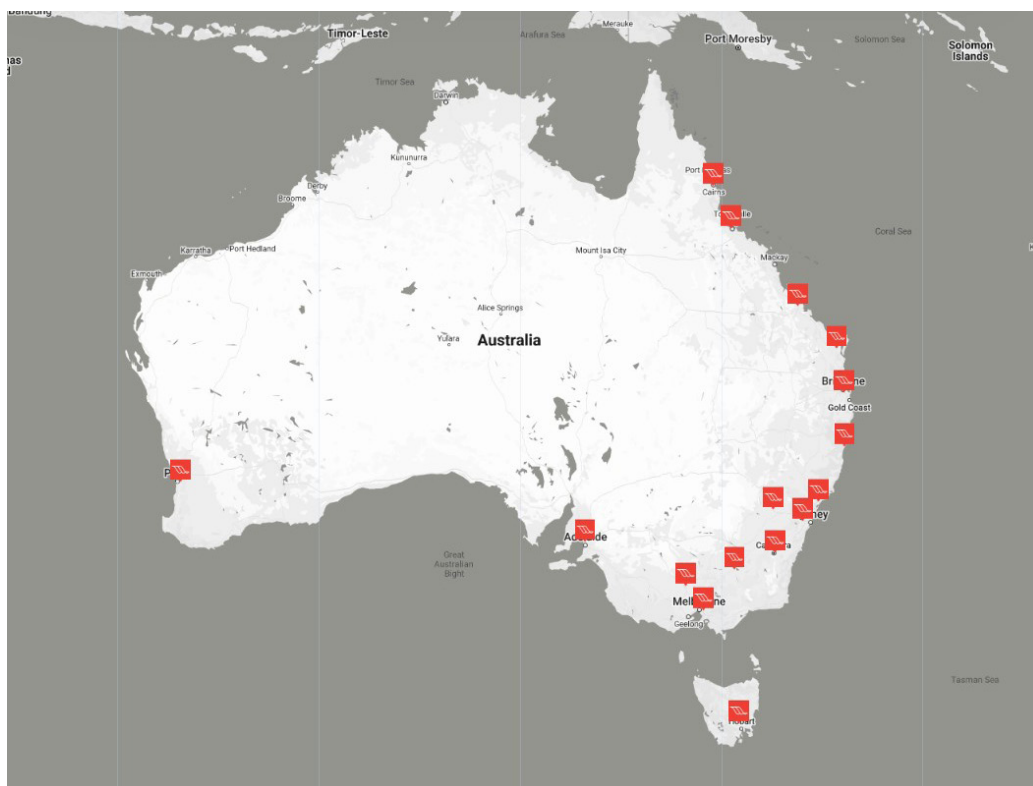

SERVICE LOCATIONS

The Stramit web page can be found at stramit.com.au.

Details of many Stramit® products can also be seen on the AIA site 'Product Selector' selector.com.au or SteelSelect.com.au.

REGION	LOCATION	CONTACT DETAILS	ORDER CUT-OFF TIMES ²		
			STANDARD DELIVERY	SHED BUNDLE LEAD TIME ³	PICK-UP HOURS ⁴
NSW & ACT	SYDNEY 33-83 Quarry Rd, Erskine Park NSW 2759	Ph 02 9834 0909	4pm	21 Days	7am - 4pm
	CANBERRA 4 Bass St, Queanbeyan NSW 2620	Ph 02 6298 2500	4pm	21 Days	7am - 4pm
	COFFS HARBOUR 6 Mansbridge Dr, Coffs Harbour NSW 2450	Ph 02 6656 3800	4pm	21 Days	7am - 4pm
	NEWCASTLE TBA	Ph 02 4041 3400	4pm	21 Days	N/A
	ORANGE 51 Leewood Dr, Orange NSW 2800	Ph 02 6360 9200	4pm	21 Days	7am - 4pm
VIC	MELBOURNE 3/1464 Ferntree Gully Rd, Knoxfield VIC 3180	Ph 03 9237 6300	4pm	12.30pm	7am - 4pm
	ALBURY 18 Ariel Dr, Albury NSW 2640	Ph 02 6092 3700	4pm	21 Days	7am - 4pm
	BENDIGO Lot 7-9 Ramsay Court, Kangaroo Flat VIC 3555	Ph 03 5448 6400	4pm	21 Days	7am - 4pm
TAS	HOBART 57 Crooked Billett Dr, Brighton TAS 7030	Ph 03 6262 8788	4pm	21 Days	7am - 4pm
SA	ADELAIDE 11 Stock Rd, Cavan SA 5094	Ph 08 8219 20001	4pm	21 Days	7am - 4pm
South QLD	BRISBANE 57-71 Platinum St, Crestmead QLD 4132	Ph 07 3803 9999	4pm	12.30pm	7am - 4pm
	MARYBOROUGH 10 Activity St, Maryborough QLD 4650	Ph 07 4123 9500	4pm	21 Days	7am - 4pm
	ROCKHAMPTON 41 Johnson St, Parkhurst QLD 4702	Ph 07 4921 5600	4pm	21 Days	7am - 4pm
North QLD	CAIRNS 53 Vickers St, Edmonton QLD 4869	Ph 07 4034 6555	4pm	21 Days	7am - 4pm
	TOWNSVILLE 402-408 Bayswater Rd, Garbutt QLD 4814	Ph 07 4412 3900	4pm	21 Days	7am - 4pm
WA	PERTH 605-615 Bickley Rd, Maddington WA 6109	Ph 08 9493 8800	4pm	12.30pm	7am - 4pm

¹ Business days only (excludes weekend and public holidays).

² Days only (excludes weekend and public holidays). Standard 48hr Delivery refers to order cut-off times for standard lead-time products as defined in our Product and Services Guide. Please be aware that some products have minimum lead times that may exceed these lead times. Please check the product listing in our Product and Services Guide or check with your local branch when placing order.
Additional charges may apply. Check with your local branch for capacity when ordering.

Our service proposition is based around available manufacturing capacity on any given day. Demand can fluctuate and impact lead times. Please check with your local branch when placing your order.

This Service Offer excludes large orders related to Commercial projects or Consolidated Shed orders.


* Registered trademarks of Stramit Corporation Pty Limited. ABN 57 005 010 195 trading as Stramit Building Products. A member of the Fletcher Building Group. TRUECORE®, COLORBOND®, ZINCALUME® and * colour names are registered trade marks of BlueScope Steel Limited.™ colour names are trade marks of BlueScope Steel Limited. ABN 16 000 011 058. © Stramit Corporation Pty Limited. This information is accurate at March 2024.

This document replaces all previous issues. Please destroy, or clearly mark as superseded, all previous issues. STR071_MAR24.

CUSTOMER PORTAL

Keeping up to date with your order, made simple.

Our secure Customer Portal gives you access to the status of your orders whenever, and wherever, you need an update. The portal lets you track your orders live, from the time our Customer Service team enters it, through processing and manufacturing, while it's being picked and packed and when it's out for delivery to you.



As an account customer, our portal allows you to:

- Track your order in real time
- Search current and historical orders to see related information
- Download your order confirmations
- See order details in granular detail
- Download Proof of Delivery (PODs)
- View Estimated Time of Arrivals (ET As) for your deliveries
- See when an order is Ready to Pick Up
- Share the order tracking with another party, e.g. an installer or end customer

Designed to make doing business easier with Stramit, the Customer Portal is available on any internet connected device and only requires registration - no downloads needed.

Register your interest today at:

<https://www.stramit.com.au/resources/design-software/stramit-customer-portal/>

ORDERING

For Trade and Account Customers seeking takeoffs and quotes, please send drawings and information to: takeoffs@stramit.com.au

Please contact and email all your orders through to your local branch.

For Purl in Orders, please also send through your drawings and NC Files to your local branch to aid in order accuracy.

For Flashings Orders, we require drawings to ensure accurate manufacturing of your products. Please email your drawings through when placing your order. You can find our Flashing Order Form on our website under **Resources**.

All products manufactured or purchased specifically to your requirements cannot be returned. Stock items may be returned for credit, although restocking fees will apply.

For Order Pickups, please refer to our Loading Requirements Guide on our website under **Resources**.

INDEX

COLORBOND® steel	2	INSULATING PRODUCTS	
Quick Roofing Estimate	3	Foil, Blanket, Wire	54
Ordering Codes – Standards for Use	4-5	ROLLER DOORS AND ACCESSORIES	
ROOFING/CLADDING		Residential and Light Industrial Roller Doors	55
Standard Delivery Details	6-11	Residential Roller Doors	56
Selecting Your Product	12	Residential Sectional Doors	57
Stramit Speed Deck Ultra® FM Approval Certification	13	Residential Sectional Door Installation	58
Stramit Monoclad® FM Approval Certification	13	Novataur Residential, Commercial Roller Doors &	
Stramit Speed Deck Ultra®	14	Personal Access (PA) Doors	59
Stramit® Corrugated	15	Roller Door Accessories	60
Stramit® Corrugated Flashings	16	Roller Door Product Warranty	61
Stramit® Curving Quality – Corrugated & Tank Iron	17	FENCING	
Stramit Monoclad® – Stramit® Monoclad Flashings	18-19	Fencing Accessories	62
Stramit Longspan®	20	FIRE RESISTING WALL SYSTEM	
Stramit Longspan® Flashings, Accessories	21	Uniguard	63
Stramit Minirib®, Stramit Miniseam™	22	AVAILABILITY	
General Accessories	23-24	Product Availability – Roofing/Rainwater	64
Stramit Mini Corry®	25	Product Availability – Premium Products	65
Stramit K-Panel®	25	Product Availability – Fencing	65
Fasteners, Accessories	26-27	TERMS AND CONDITIONS OF SALE	66-69
Stramit® Patio Components	28	RETURN OF GOODS	
Stramit® Flat Sheet	28	Stock lines may be returned for Credit, with Stramit's agreement, subject to the following charges:	
Stramit® MagnaFlow® – Roofing, Cladding, Rainwater	29	i) Where goods are returned by the customer a re-stocking fee of 20% (\$20 minimum) is applicable.	
FORMWORK/STRUCTURAL COMPONENTS		ii) Where goods are picked up by Stramit for return, Standard Delivery charges plus a re-stocking fee of 20% are applicable.	
Stramit Condeck HP® composite decking	30	iii) Returns should be no later than 5 working days after delivery date.	
Stramit® Purlins & Girts	31	Non stock items, such as cut to length products are not returnable to Stramit.	
Purlins - ZAM Coating	32	Refer to Terms & Conditions of Sale inside back cover.	
ZAM Custom Sections	33	The Company will not accept materials returned for credit under any circumstances unless authorised by the Company and a "Collect/Return of Goods" docket is issued.	
Stramit® Bridging	34-35	The Company will not accept any responsibility for materials returned under any other circumstances.	
Bridging Installation Guide	36-37	PRICES – All prices quoted are ex factory and subject to GST and delivery charge.	
Stramit® Framing Sections	38-39		
Stramit® Flooring System Components	40		
GUTTER/FASCIA/DOWNSPIPE			
Stramit Strongline® Fascia & Accessories	41		
COLORBOND® steel Care & Maintenance	42		
Stramit® Easiline Commercial Gutter	43		
Stramit® Easiline Patio Gutter	43		
Stramit® Easiline Domestic Gutter	43		
Stramit Strongline® Gutter	43		
Stramit Trad-Line™ Gutter	43		
Stramit® Quarter Round Gutter	44		
Stramit® Gutter Accessories	44		
Stramit® Downpipe & Accessories	45		
CUSTOM FLASHINGS			
Stramit® Standard Flashings	46		
Stramit® Custom Flashings – Ordering Procedure	47		
Stramit® Custom Flashings	48-52		
Stramit® Customer Order – Flashing Detail	53		

**FOR PRICING OR FURTHER INFORMATION
PLEASE CONTACT YOUR SALES REPRESENTATIVE
OR CALL THE SALES HOTLINE.**

IMPORTANT NOTE – HANDLING & STORAGE

Roofing and Cladding sheets when stored on site must be kept dry by storing under cover.
Wet storage stains can occur from condensation even in dry weather.

**NOTE: Technical details displayed in this book are a guide only.
For further information, please consult the relevant Stramit Technical Manual.**

Colorbond®

COLORBOND® steel is more than a world-class building product. It's an iconic brand that's helped the people of our building industry shape the very landscape in which we live.

MADE FOR AUSTRALIAN CONDITIONS

Australia is battered by our relentless climate every day. Today's COLORBOND® steel is the result of over 5 decades of research, development and innovation, based on over 50 years of data from thousands of steel samples.

TRIED AND TESTED FOR THE AUSTRALIAN ENVIRONMENT

For roofing and walling close to water, COLORBOND® Ultra steel has been designed to provide enhanced corrosion protection, while the iconic COLORBOND® steel range of 22 colours is ideal for most building designs in most locations. Regardless of where you build, there's likely to be a COLORBOND® steel solution for you.


COOLER IN THE SUMMER HEAT

COLORBOND® steel colours incorporate Thermatech® solar reflectance technology¹, which can mean reduced reliance on air-conditioning and less heat stress on a roof. For commercial roofing applications, COLORBOND® Coolmax® steel provides BlueScope's highest solar reflectance product, which may help to reduce roofing temperatures and keep buildings cooler².

FIVE LAYERS OF PROTECTION

Manufactured in Australia to relevant Australian Standards (AS 1397-2011 and AS/NZS 2728:2013) and tested in some of the harshest Australian conditions, COLORBOND® steel is far more than just 'paint on steel'.

1. The steel base meets relevant Australian Standards, ensuring strict adherence to the required grade and strength.
2. The base is then coated in BlueScope's industry leading metallic coating incorporating Activate® technology⁴, to provide enhanced corrosion resistance.
3. A thin pre-treatment layer is applied to optimise the adhesion of further coatings.
4. A corrosion inhibitive primer is baked onto the surface.
5. A topcoat of specially developed, exterior grade paint is baked on to provide resistance to chipping, flaking and blistering and to ensure the finish retains its look for longer.

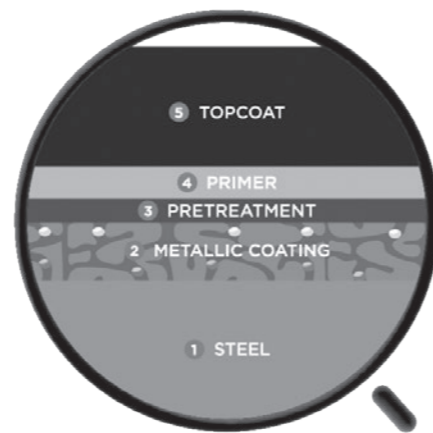

PEACE OF MIND FOR YOU AND YOUR CUSTOMERS

COLORBOND® steel for roofing is warranted for corrosion to perforation for up to 36 years, as well as paint flake and peel for up to 20 years³. Detailed information can be accessed at bluescopesteel.com.au/warranties.

NATIONWIDE SUPPORT

BlueScope's nationwide network of sales and technical support helps provide advice and information for customers, architects, designers, engineers, builders, trades and homeowners who use COLORBOND® steel.

1. Thermatech® technology is not available in Night Sky®, or non-standard colours, and is not available in COLORBOND® Stainless steel, COLORBOND® Metallic steel, or COLORBOND® Coolmax® steel. Results will depend on roof colour, level and location of insulation, type and location of building shape and function.
 2. Compared to conventional roofing materials of lower solar reflectance index (SRI), such as ZINCALUME® steel and all other roofing materials in the COLORBOND® steel range. Any savings and/or the extent to which a building is cooler may vary and depend upon the particular circumstances of your building, including building location, level of insulation, location of air-conditioning when installed, building shape, building function and environmental factors. For further information refer to Stockland case study <http://steel.com.au/colorbond-coolmax-steel>.
 3. Warranties are subject to exclusions, application and eligibility criteria. For full terms and conditions and to determine the eligibility of your product for the warranty visit bluescopesteel.com.au/warranties or contact BlueScope on 1800 064 384.
 4. Aluminium/zinc/magnesium alloy-coated steel substrate incorporating Activate® technology is not available for COLORBOND® Stainless steel, and COLORBOND® steel products with a galvanised steel substrate.

QUICK ROOFING ESTIMATE – HIPPED ROOF TAKE-OFF

The table of Roof Slope Factors below allows quick calculations of roof area, sheet length and hip length.

These methods are for quick estimating purposes only. Accurate measurements must be taken from the actual roof frame before ordering roofing and rainwater products.

As an example, take a typical hipped roof where all four roof sections have the same slope (30°) and all hips are of equal length.

ROOF AREA

First determine the area of the roof plan by multiplying the length of the roof by the width. Before making the calculation, add gutter overhangs of 50mm. In this case, there are gutters on all four sides. To find the area of the hipped roof, simply multiply this plan area by the Roof Slope Factor for Roof Area. The same method is used for gable roofs.

$$19.1 \times 8.1 = 154.7 \times 1.155 = 178.7$$

Therefore, roughly 179m² of sheeting will be needed to cover the roof. On complex roof shapes, extra may need to be added to allow for wastage.

SHEET LENGTH

On the roof plan, measure the distance from the line of the ridge to the outside edge of the fascia, which in the example is half the span or 4000mm. Multiply this measurement by the Sheet Length Roof Slope Factor to find the length of the sheet required to span from the ridge to the fascia. Note that all roof sheeting must extend at least 50mm beyond the fascia line to provide gutter overhang.

$$4000 + 50 \times 1.155 = 4678\text{mm}$$

HIP CAPPING

To find the length of ridge capping required to cover one hip, measure the distance from the ridge line to the fascia on the roof plan (here 4000mm) add the gutter overhang and multiply by the Hip Length Roof Slope Factor for 30°. Multiply by 4.


$$4000 + 50 \times 1.528 \times 4 = 24.8\text{m}$$

RIDGE CAPPING

For hipped roofs where all sides have the same slope, the length of the top ridge is equal to the length of the roof plan minus the width, regardless of slope. Add 5% to all capping to allow for laps.

$$19 - 8 = 11 + 5\% = 11.55\text{m}$$

Typical hipped roof (roof slope = 30°)

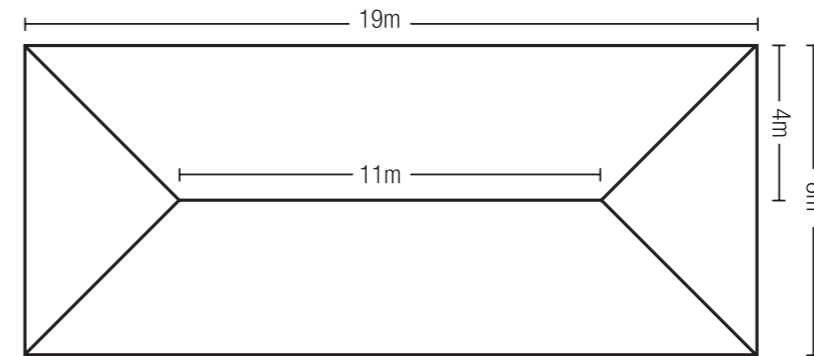

ROOF SLOPE FACTORS

Roof Slope (degrees)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Roof Area/Sheet Length	1.000	1.001	1.001	1.002	1.004	1.006	1.008	1.010	1.012	1.015	1.019	1.022	1.026	1.031	1.035
Hip Length	1.414	1.415	1.415	1.416	1.417	1.418	1.420	1.421	1.423	1.425	1.428	1.430	1.433	1.436	1.439

Roof Slope (degrees)	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Roof Area/Sheet Length	1.040	1.046	1.051	1.058	1.064	1.071	1.079	1.086	1.095	1.103	1.113	1.122	1.133	1.143	1.155
Hip Length	1.443	1.447	1.451	1.456	1.460	1.465	1.471	1.477	1.483	1.489	1.496	1.503	1.511	1.519	1.528


Roof Slope (degrees)	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
Roof Area/Sheet Length	1.167	1.179	1.192	1.206	1.221	1.236	1.252	1.269	1.287	1.305	1.325	1.346	1.367	1.390	1.414
Hip Length	1.537	1.546	1.556	1.567	1.578	1.590	1.602	1.616	1.630	1.644	1.660	1.677	1.694	1.712	1.732

Roof Slope (degrees)	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
Roof Area/Sheet Length	1.440	1.466	1.494	1.524	1.556	1.589	1.624	1.662	1.701	1.743	1.788	1.836	1.887	1.942	2.000
Hip Length	1.753	1.775	1.798	1.823	1.849	1.877	1.907	1.939	1.973	2.010	2.049	2.091	2.136	2.184	2.236

ORDERING CODES – STANDARDS FOR USE


Ordering Codes are used in this Price List and should be used when ordering products from your local branch.

Ordering Codes for COLORBOND® Cut to Length Product ONLY the Order Code comprises four (4) separate categories.

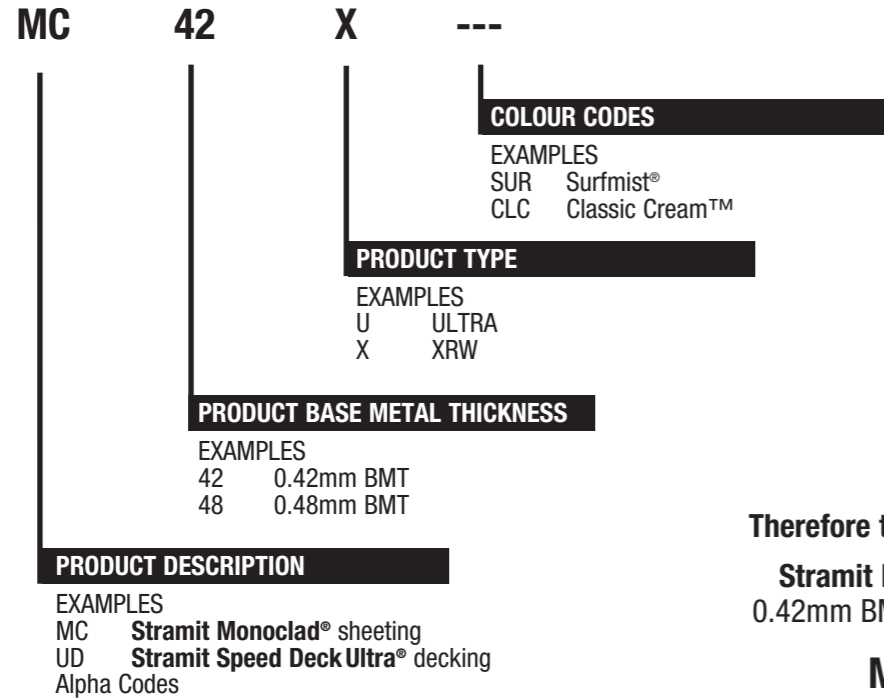

Therefore the Ordering Code for
Stramit Monoclad® sheeting
0.42mm BMT COLORBOND® steel
MC42X---

Ordering Codes for ZINCALUME® steel / Galvanised Cut to Length Product ONLY the Order Code comprises three (3) separate categories.

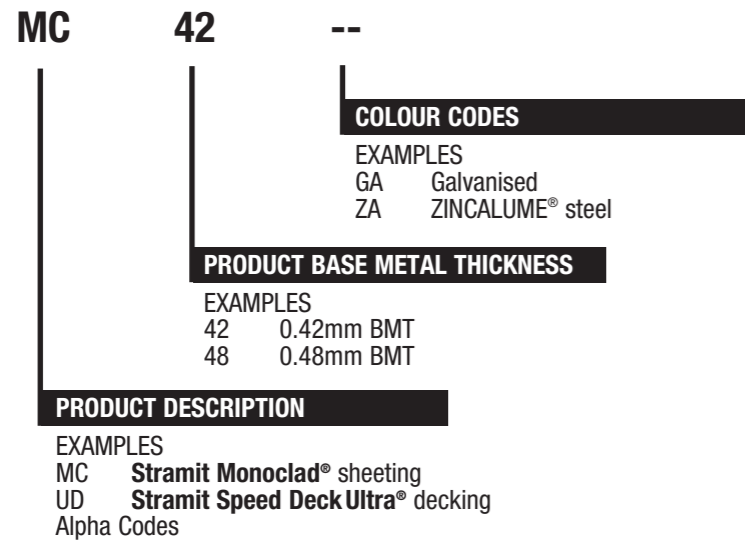


Therefore the Ordering Code for
Stramit Monoclad® sheeting
0.42mm BMT ZINCALUME® steel
MC42ZA


ORDERING CODES – STANDARDS FOR USE

Ordering Codes are used in this Price List and should be used when ordering products from your local branch.

Ordering Codes for COLORBOND® steel items either Stock Length or Cut to Length again the Order Code comprises three (3) separate categories.

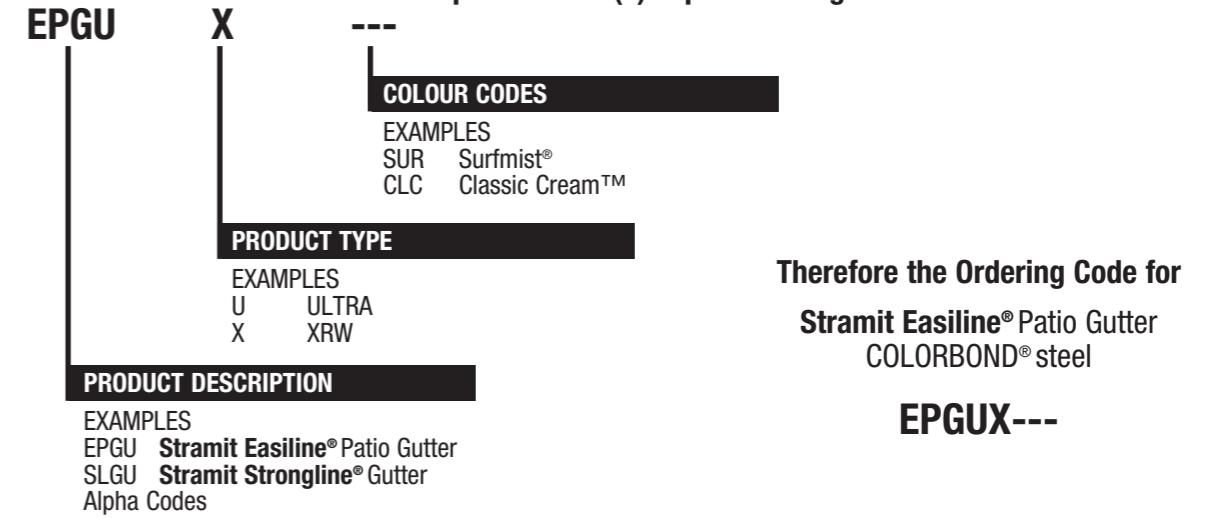

Ordering Codes for ZINCALUME® steel items either Stock Length or Cut to Length again the Order Code comprises two (2) separate categories.

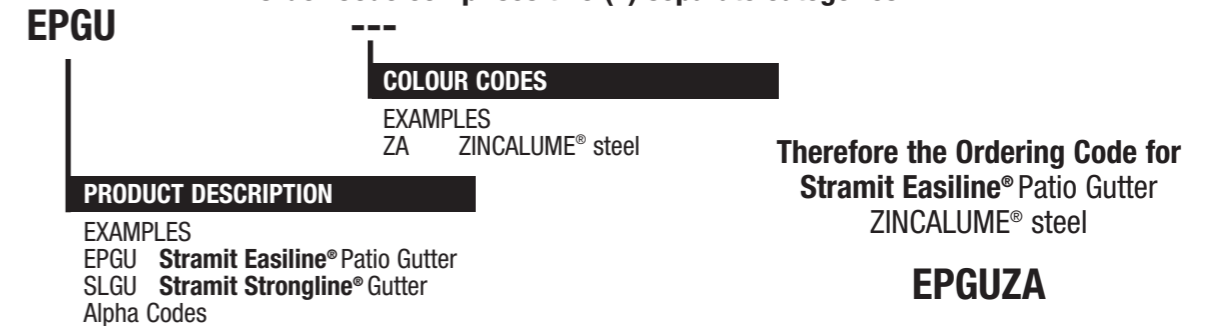

ABBREVIATIONS

POA	Price on Application
BMT	Base Metal Thickness
TCT	Total Coated Thickness
ZA	ZINCALUME® steel
COL	COLORBOND® steel
GA	Galvanised

COLOURS (COLORBOND® steel)

BAS	Basalt®	MNR	Manor Red®
CLC	Classic Cream™	MON	Monument®
CTG	Cottage Green®	NTS	Night Sky®
COV	Cove®	PEC	Pale Eucalypt®
DOC	Deep Ocean®	PPB	Paperbark®
DUN	Dune®	SHG	Shale Grey™
EVH	Evening Haze®	SUR	Surfmist®
GLY	Gully®	TRN	Terrain®
IST	Ironstone®	WLB	Wallaby®
JAS	Jasper®	WDG	Woodland Grey®
MGV	Mangrove®	WSP	Windspray®

COLOURS (COLORBOND® Ultra steel)

DUN	Dune®
MON	Monument®
SUR	Surfmist®
WLB	Wallaby®
WSP	Windspray®
WDG	Woodland Grey®

COLOURS (COLORBOND® steel Matt)

BAS	Basalt® Matt
MON	Monument® Matt
SUR	Surfmist® Matt



METROPOLITAN
Telephone (08) 9493 8800

COUNTRY
Telephone 1800 218 046

EMAIL
perthsales@stramit.com.au

STANDARD DELIVERY DETAILS

NOTE

- 1) Any Customer who has exceeded their account credit limit or whose payments are overdue, may experience delays in the manufacture and delivery of goods ordered.
- 2) All payments by credit card are subject to a 2% card service fee.
- 3) Due to handling and transport limitations, the maximum length for rainwater goods is 8000mm.

TO ORDER

Made to measure roofing and rainwater products will be delivered within 48 hours.
Orders placed after 4.00 pm will be treated as next day orders.

DELIVERY HOURS

Week days from 7.30 am to 5.30 pm.

Additional charges will apply to deliveries outside these hours, on weekends, and public holidays.

STANDARD DELIVERY CHARGES

DESCRIPTION	CODE	METROPOLITAN AREA
EX MADDINGTON		
To Store up to 9.0 metres	FRSTORE	\$152.43
To Site up to 9.0 metres	FRSITE	\$152.43
Priority Delivery	FR5PRIORITY	\$198.84
7.30am Delivery	FR5EARLY	\$217.20
7.30am Delivery Long	FR5EARLYLONG	\$369.12
Lengths 9.0 metres to 20.0 metres	FR5LONG	\$257.52
Lengths 20.0 metres to 25 metres	FR5XLONG	\$309.28
Lengths 25 metres up to 27.3 metres	FR5XXLONG	\$369.12
Lengths 27.3 metres and over	FRSPEC	POA

HIAB Deliveries - Maximum length 13.0 metres

Deliveries over 20.0 metres

All deliveries over 20.0 metres require Escorts and Permits.

Escorts from Stramit Depot

(Note: Minimum 2.5 hour charge)

Permits

Spreader Bar Hire

FRESCORT	\$108.90 per hour
FRRPERM	\$27.50
	\$110.00 per day

EX MADDINGTON

TRANSPORT OUTSIDE METROPOLITAN AREA UP TO 13.0 METRES:

Daily:	Bunbury	\$152.43	Everyday
Weekly:	Capel	\$152.43	Mondays, Tuesdays & Thursdays
	Busselton	\$152.43	Mondays, Tuesdays & Thursdays
	Dunsborough	\$152.43	Mondays & Thursdays
	Margaret River	\$152.43	Mondays & Thursdays
	Witchcliffe	POA	Mondays & Thursdays
	Northam	POA	Mondays & Thursdays
	Wagin	POA	Tuesdays & Fridays
	Katanning	POA	Tuesdays
	Albany	POA	Tuesdays
	Gingin	POA	Wednesdays
	Cataby	POA	Wednesdays
	Lancelin	POA	Fridays
	Jurien Bay	POA	Fridays
	Dongara	POA	Wednesdays & Fridays
	Geraldton	POA	Wednesdays & Fridays

All other destinations by request POA
All deliveries over 13.0 metres POA



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

STANDARD DELIVERY DETAILS

DELIVERY INFORMATION

Stramit trucks enter a customer's property at the customer's own risk. The customer will be held responsible for any subsequent damage to either Stramit or their own property as well as other additional costs incurred i.e., towing, etc.

WINTER DELIVERIES

Long Loads will only be after 9am due to curfew regulations and are subject to additional charges.

MAJOR PROJECTS

Major project work deliveries subject to negotiation.

Contact your Area Representative or Stramit Sales Office.

PACKAGING

If special packing is required additional costs will be to the customer's account.

Contact your Area Representative or Stramit Sales Office.

CUSTOMER PICK-UPS

Ex Maddington 7.00 am to 4.00 pm Monday to Friday.

Works are closed Saturday and Sunday.

Pick-up address: 605-615 Bickley Road, Maddington, WA, 6109

Customers picking up orders must comply with the site safety rules regarding personal protective clothing and traffic management. Details are provided at dispatch or on request.

Should you require a special collection service from our premises outside of normal hours, prior arrangement must be made with the Operations Manager, Sales Managers, Dispatch Supervisor or Regional Manager and an OUT OF HOURS SERVICE CHARGE will usually apply.

Refer to Terms and Conditions of Sale inside back cover. In particular item 4.4. for Holding of Goods, which reads as follows:

- 4.4 If the Buyer does not collect the Goods by the collection date, then Stramit may, without limiting any other rights available to it, store the Goods or deliver them to the Delivery Site and the Buyer must, on demand, pay all cost of delivery and any additional charges (including storage costs) and costs incurred by Stramit.

COUNTRY CUSTOMERS

To arrange pick-ups by your carrier, please contact Dispatch to arrange a loading time. Maddington (08) 9493 8800.

Please phone at least one (1) working day before the proposed pick up.

Where you nominate a carrier to pick up on your behalf without our prior agreement, such accounts or charges will be referred to you for payment by way of invoice.

UNLOADING OF DELIVERIES

Customers/receivers are responsible at all times. Our terms are "On lorry at site or store".

UNLOADING/DEMURRAGE (FRDMG)

Unloading at the site is the responsibility of the customer. A maximum time of 30 minutes per truck is allowed for unloading; any additional time will be charged to the customer at the rate of \$146.30 per hour.

UNATTENDED SITES

Where delivery is made to an unattended site, our driver will endeavour to effect delivery as close to the site as possible. In these instances, Stramit will not accept claims for damage to product during unloading, nor claims for pilfering of part of or all of the delivery made.

Refer to Terms and Conditions of Sale, inside back cover.

DELIVERY CONDITIONS


Refer to Terms & Conditions of Sale, inside back cover.

REDELIVERIES

Product refused at the originally delivery and requested to be redelivered will incur a minimum charge of \$150.00 over and above the standard delivery charge.

STANDARD DELIVERY DETAILS

STANDARD DELIVERY DETAILS






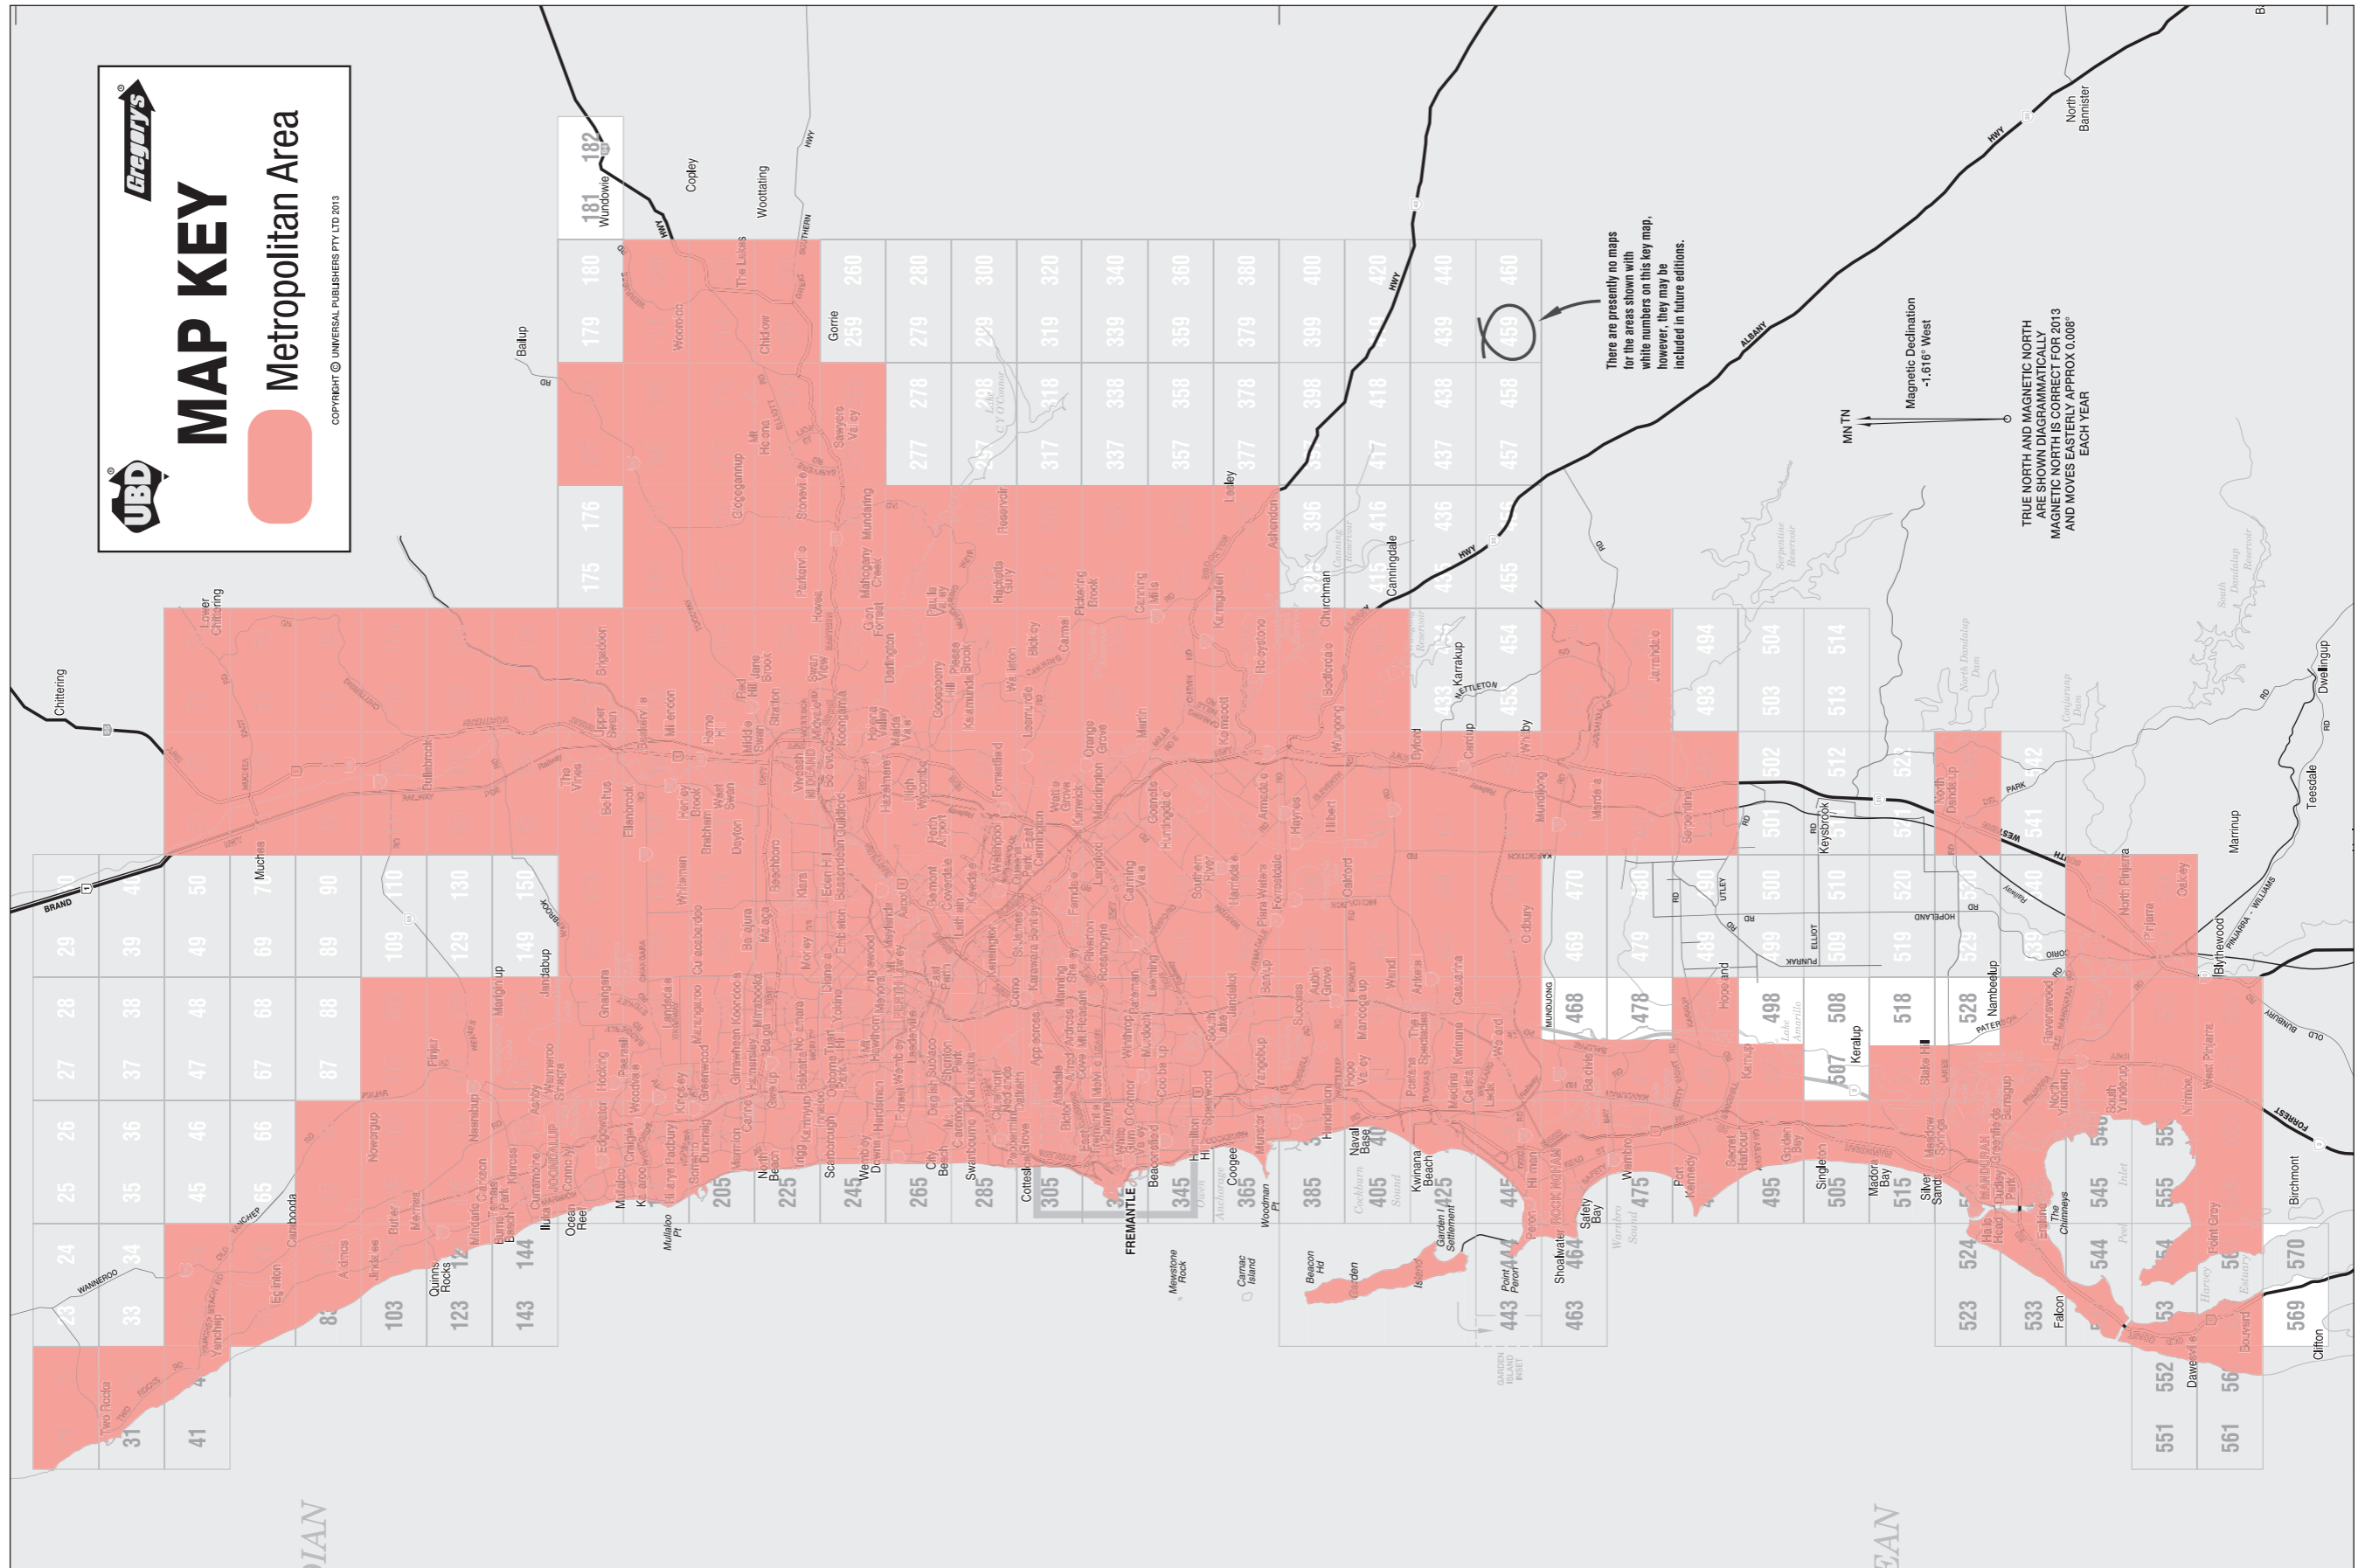


LOADING REQUIREMENTS



OVERHANG LIMITS

THE DRIVER'S VISION MUST NOT BE OBSTRUCTED

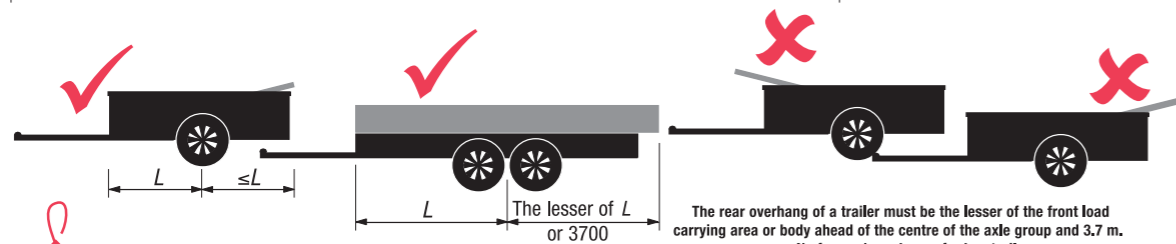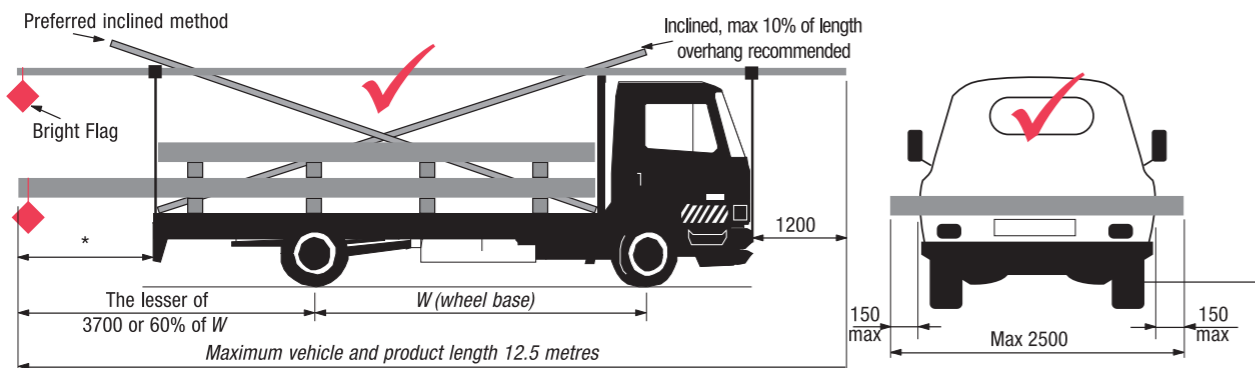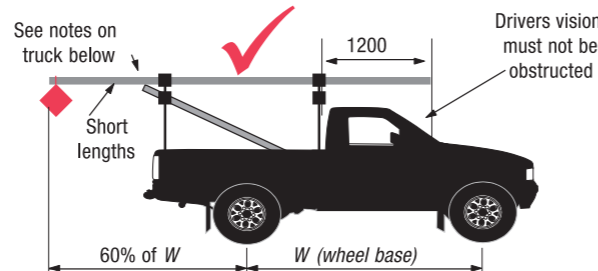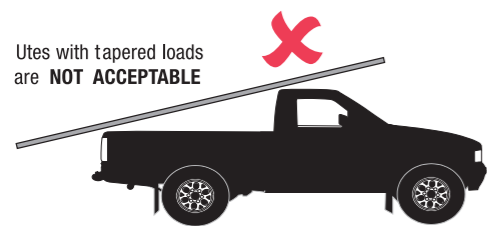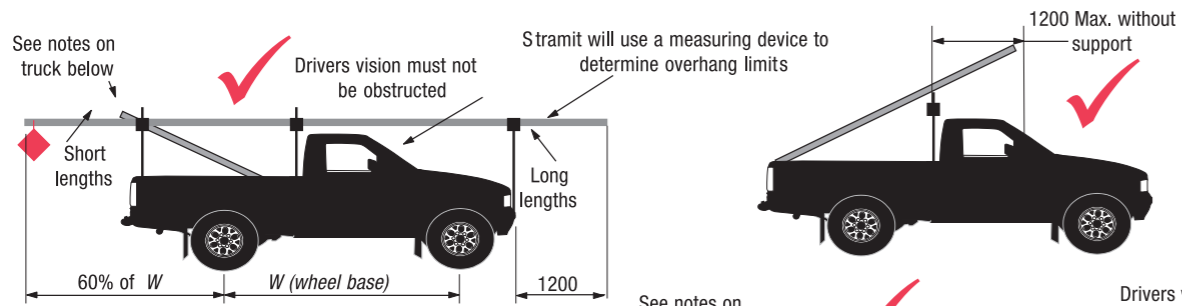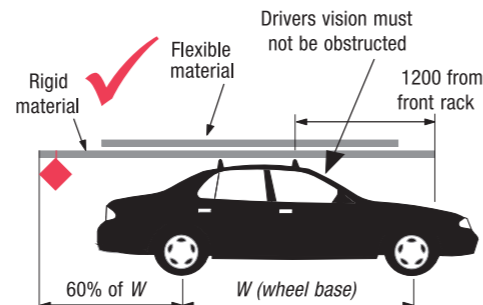

A 450MM SQUARE BRIGHT RED FLAG IS REQUIRED ON ANY OVERHANG THAT CANNOT BE EASILY SEEN (MANDATORY BEYOND 1200mm)

LOADING REQUIREMENTS




SECURE YOUR LOAD!

DO NOT USE OCGY STRAPS OR FLEXI STRAPS

Minimum 2 lashings per stack for items longer than 750 mm.

Recommended Minimum Lashing 1.5m apart

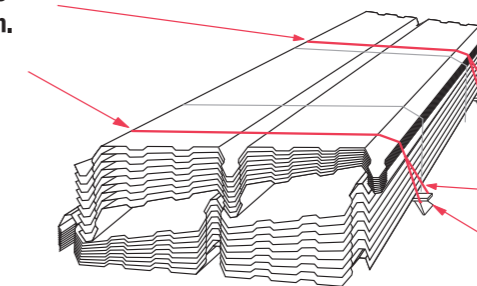

No low friction surfaces (metal on metal, plastic on metal, etc.)

Watch your Lashing Angle! The More Upright The More secure

Roof Racks must be secure, Maximum loads: Sports Racks - 40kg Trades Racks - 100kg



*SEE THE TRANSPORT SAFETY GUIDELINE OWNER PICK UPS FOR FURTHER INFORMATION

VEHICLES CONSIDERED INAPPROPRIATE CANNOT BE LOADED!
YOUR SAFETY IS OUR CONCERN

The information presented is for guidance only and compliance with applicable laws and standards remains your responsibility












Table 1 - Lashing Requirements

Lashing Angle to Horizontal \angle	25 mm hand tightened webbing	25 mm ratchet webbing	35 mm ratchet webbing	8 mm synthetic rope with single hitch
60 to 90°	52 kg per strap	170 kg	430 kg	87 kg per rope
45 to 60°	46 kg per strap	140 kg	350 kg	71 kg per rope
30 to 45°	30 kg per strap	100 kg	250 kg	50 kg per rope
15 to 30°	15 kg per strap	52 kg	130 kg	26 kg per rope

Key Assumptions in Tables 1

- All lashings are fully tensioned. If not, then more lashings may be required.
- No low friction surfaces (e.g. steel on steel, plastic on plastic, plastic on steel, etc.)
- A minimum static coefficient of friction of $\mu = 0.40$ is achieved under all products and between layers of a load. (e.g. rubber or timber against steel or plastic).
- Round loads require belly wrapping and extra restraints.

SELECTING YOUR PRODUCT

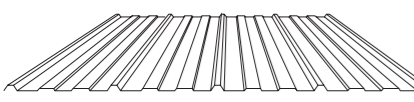
Product Roofing/Cladding	Page	BMT mm	Nominal Cover Width mm	Minimum Pitch	Roof Span		Wall Span	
					Int Span mm	End Span mm	Int Span mm	End Span mm
Stramit SharpLine® Direct Fix 	13	0.55	290	3 Degree	900	600	1200	950
		0.55	490	3 Degree	450	350	600	450
		0.55	265	3 Degree	900	600	1200	950
Fixing screws required = 1/sheet/batten				(1 in 20)				
Stramit SharpLine® Clip Fix 	13	0.55	320	3 Degree	900	600	1200	950
		0.55	520	3 Degree	450	350	600	450
		0.55	285	3 Degree	900	600	1200	950
Fixing screws required = 2 per clip for both metal & timber (1 in 20)								
Stramit Speed Deck Ultra® 	14	0.42	700	1 Degree	2100	1750	3000	2500
		0.48		(1 in 60)	2700	2250	3000	2500
Fixing Screws required 1/sheet/batten								
Stramit® Corrugated 	15	0.42	762	†	1200	1000	2600	2150
		0.48		5 Degrees	1600	1300	2850	2350
		0.60		(1 in 12)	1600	1300	2850	2350
Fixing Screws required 3/sheet/batten†								
Stramit® Curving Quality 	17	0.60	762	-	1200	1000	2700	2250
		Fixing Screws required 3/sheet/batten†						
Stramit Monoclad® 	18	0.35	762	Walls only	-	-	3000	2500
		0.42		2 Degrees	1700	1400	3000	2500
		0.48		(1 in 27)	2300	1900	3000	2500
Fixing Screws required 4/sheet/batten†								
Stramit Longspan® 	20	0.42	700	3 Degrees	2100	1750	3000	2500
		0.48		(1 in 20)	2700	2250	3000	2500
Fixing Screws required 3/sheet/batten†								
2 degree minimum pitch residential only.								
Stramit Minirib® 	22	0.42	900	Walls only	-	-	1500	1250
		Fixing Screws required 4/sheet/batten†						
Stramit Miniseam™ 	22	0.42	850	Walls only	-	-	1500	1250
		Fixing Screws required 4/sheet/batten†						
Stramit Mini Corry® 	25	0.42	825	Walls only	-	-	1200	1000
		0.48		-	-	1300	1050	
Fixing Screws required 7/sheet/batten†								
NOTE: Stramit Mini Corry® panelling available ex East.								
Stramit K-Panel® 	25	0.35	864	Walls only	†	†	1500	1250
		Fixing Screws required 4/sheet/batten†						


TCT = Total Coated Thickness. This is a nominal dimension. It should not be used in specifications due to variances in Coating and paint finish.
 BMT = Base Metal Thickness. This is thickness of steel only and together with minimum yield strength and rolled profile provides the basis for calculation of the structural needs of a system. It should be referred to in specifications followed by the letters BMT.


† NOT suitable for cyclonic conditions.

Conditions. For N1 wind conditions and normal duty foot traffic.




ROOFING • ACCESSORIES

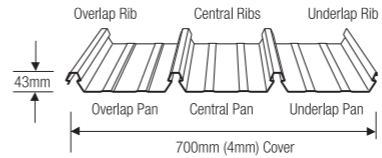Product Roofing/Accessories	Product Details	Code	Finish	BMT mm	Unit
FM Approval Certification					
Stramit Speed Deck Ultra® 		UD42FMZA	ZA	0.42	sq m
		UD48FMZA	ZA	0.48	sq m
		UD42FMX---	COL	0.42	sq m
		UD48FMX---	COL	0.48	sq m

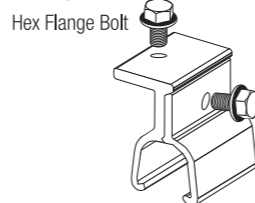Accessories	Product Details	Code	Finish	BMT mm	Unit
S-5-K700 Clamp 					each
	NOTE: Used for attaching services and frames (eg. PV Panels) without puncturing the cladding with screws				


Product Roofing/Accessories	Product Details	Code	Finish	BMT mm	Unit
Stramit Monoclad® 		MC42FMZA	ZA	0.42	sq m
		MC48FMZA	ZA	0.48	sq m
		MC42FMX---	COL	0.42	sq m
		MC48FMX---	COL	0.48	sq m

ROOFING • CLADDING • ACCESSORIES

Product Roofing/Cladding/Accessories	Details	Cover Width mm	Ordering Code	Finish	BMT mm	Unit
Stramit SharpLine® Direct Fix 	25mm Rib (short)	290	SLS290D55X---	COL	0.55	per m ²
	38mm Rib (tall)	490	SLS490D55X---	COL	0.55	per m ²
		265	SLT265D55X---	COL	0.55	per m ²
Stramit SharpLine® Clip Fix 	25mm Rib (short)	320	SLS320C55X---	COL	0.55	per m ²
	38mm Rib (tall)	520	SLS520C55X---	COL	0.55	per m ²
		285	SLT285C55X---	COL	0.55	per m ²
Accessories suit SharpLine® Clip Fix 	Clip (short) 25mm		SLSCGA	GA		each
	Clip (tall) 38mm		SLTCGA	GA		each

Available in ultra & matt finishes.
 Minimum length 2000, Maximum length 9000
 NB: Lead time 72 hours.

Roof pitches below 7.5° for SharpLine® direct fix and 5.0° for SharpLine® clip fix profiles require sealed side laps. All Roof lengths above 5.0m also require sealed side laps. Refer to Product Technical manual brochure for installation requirements to plywood backing.

Fasteners	Product Details	Code	Finish	Unit
	10 x 16 Flathead Needle Point	S1016FNP	Plain	per box 1000
	10 x 16 Wafer Tek (For fixing to steel)	S1016WT	Plain	per box 1000
	10 x 25 Wafer Type 17 (For fixing to timber)	S1025W17	Plain	per box 1000

SPEED DECK ULTRA • ROOFING • ACCESSORIES

Product Roofing/Accessories	Product Details	Code mm	Finish	BMT	Unit
<p>Stramit Speed Deck Ultra® Hi-Tensile G550</p> <p>NOTE: Minimum length 1 metre Maximum length 30 metres Longer lengths by negotiation Subject to minimum order quantities. Colour availability on application.</p>		UD42ZA	ZA	0.42	per m ²
		UD48ZA	ZA	0.48	per m ²
		UD42X---	COL	0.42	per m ²
		UD48X---	COL	0.48	per m ²
		UD42KWHN	Coolmax®	0.42	per m ²
		UD48KWHN	Coolmax®	0.48	per m ²
		UD42U---	Ultra	0.42	per m ²
		UD48U---	Ultra	0.48	per m ²
		UD42T---	Matt	0.42	per m ²
		UD42ZM8---	Magnaflow	0.42	per m ²
Fibreglass Roof Sheeting	Suit Stramit Speed Deck Ultra® decking <i>CLR, OPA</i>	TSFGUD24---	2400gsm		lin metre
					Lengths over 11.6m incur extra delivery charges
Fixing Clips	Fixing Clips no fasteners (40 per box)	UDFC	GA		each
	FarLap Lapping Accessory	UDFARLAP			each
	SkyLap Joint System for Fibreglass Sheeting	UDSKYLAP			each
	<i>To calculate clip requirements divide sheet length by purlin spacing, round up if required and add 1 for the end clip. Then multiply by the number of sheets. Clip covers full 700mm of sheet width.</i>				
Fasteners	12x30 Hex Head (No Neo) Self Drilling/Tapping (for fixing to metal)	S1230HTNN			per 1000
Accessories	Stop Ending tool (Turn up/turn down) Double ended	UDSETD			each
	Farlap TurnUp/TurnDown Tool	UDFARLAPSETD			each
Accessories	Filler Strip 700 (Bottom)	UDEFSBTM			each
	Filler Strip 700 (Top)	UDEFSSTOP			each
Roof Rack Spacers	75mm	RRISGA			each

CORRUGATED • ROOFING • CLADDING • ACCESSORIES

Product Roofing/Cladding	Product Details	Code	Finish	BMT mm	Unit	
<p>Stramit® Corrugated</p> <p>NOTE: Minimum length 1 metre Maximum length 22 metres Longer lengths by negotiation</p>		C42ZA	ZA	0.42	per m ²	
		C48ZA	ZA	0.48	per m ²	
		C42X---	COL	0.42	per m ²	
		C48X---	COL	0.48	per m ²	
		C42DH	Double Sided	0.42	per m ²	
		C42KWHN	Coolmax®	0.42	per m ²	
		C48KWHN	Coolmax®	0.48	per m ²	
		C42IOWHP11	Perforated OW only	0.42	per m ²	
		C42U---	Ultra	0.42	per m ²	
		C48U---	Ultra	0.48	per m ²	
		C48M---	Metallic	0.48	per m ²	
		C42T---	C Matt	0.42	per m ²	
		C42ZM8---	Magnaflow	0.42	per m ²	
	Translucent Roof Sheeting Suit	Fibreglass <i>Ice Clear, Opal, Haze Green</i>	TSFGC18---	1800gsm (6oz)		lin metre
	Stramit® Corrugated		TSFGC24---	2400gsm (8oz)		lin metre
		<i>Lengths over 11.9m incur extra delivery charges</i>				
	Polycarbonate <i>Clear, Grey, Opal, Light Bronze and Dark Tint</i>	TSPCC---18	1800mm length	0.80	each	
		TSPCC---21	2100mm length	0.80	each	
		TSPCC---24	2400mm length	0.80	each	
		TSPCC---27	2700mm length	0.80	each	
		TSPCC---30	3000mm length	0.80	each	
		TSPCC---33	3300mm length	0.80	each	
		TSPCC---36	3600mm length	0.80	each	
		TSPCC---39	3900mm length	0.80	each	
		TSPCC---42	4200mm length	0.80	each	
		TSPCC---48	4800mm length	0.80	each	
		TSPCC---54	5400mm length	0.80	each	
		TSPCC---60	6000mm length	0.80	each	
		TSPCC---72	7200mm length	0.80	each	
		TSPCC---81	8100mm length	0.80	each	
Note: Not all lengths available in all colours						
Accessories	Superseal Filler Strip (eave & ridge)	CEFS Black	918mm		each	
Fasteners - Class 4 Roof Zip Screws	M6 x 50 Hex Head SDS (for crest fixing to timber and steel) (up to 1.9mm steel)	S0650HZIP4H S0650HZIP4 S0650HZIP---4H S0650HZIP---4	Plain Plain Colour Colour		per pack 100 per box 1000 per pack 100 per box 1000	






CORRUGATED • FLASHINGS

Product Flashings	Product Details	Code	Finish	BMT mm	Unit
	Stramit® Roll Top Ridge Cap	Custom Made			
	10mm, breaks	RTR40ZA	ZA	0.40	lin metre
		RTR40X---	COL	0.40	lin metre
		RTR55ZA	ZA	0.55	lin metre
		RTR55X---	COL	0.55	lin metre
	Reverse Roll	RTR40RRX---	COL	0.40	lin metre
	RTR55RRX---	COL	0.55	lin metre	
	Stramit® Stepped Roll Top Ridge Cap	Custom Made			
		RTRRIB40ZA	ZA	0.40	lin metre
		RTRRIB40X---	COL	0.40	lin metre
		RTRRIB55ZA	ZA	0.55	lin metre
		RTRRIB55X---	COL	0.55	lin metre
	Reverse Roll	RTRRIB40RRX---	COL	0.40	lin metre
	Stramit® Flat Top Ridge Cap	Custom Made			
		RFC40ZA	ZA	0.40	lin metre
		RFC40X---	COL	0.40	lin metre
		RFC55ZA	ZA	0.55	lin metre
		RFC55X---	COL	0.55	lin metre
	10mm, breaks	RFC40RRX	COL	0.40	lin metre
	Reverse Roll	RFC55RRX---	COL	0.55	lin metre
	Stramit® Valley Gutter	Custom Made			
		VRIBWA40ZA	ZA	0.40	lin metre
		VRIBWA40X---	COL	0.40	lin metre
		VPF55ZA	ZA	0.55	lin metre
		VPF55X---	COL	0.55	lin metre
	Stramit® Barge Capping	Custom Made			
		BFC24040ZA	ZA	0.40	lin metre
		BFC24040X---	COL	0.40	lin metre
		BFC24055ZA	ZA	0.55	lin metre
	BFC24055X---	COL	0.55	lin metre	
	Stramit® Under Flashings	Custom Made			
		UFC40ZA	ZA	0.40	lin metre
		UFC40X---	COL	0.40	lin metre
		UFC55ZA	ZA	0.55	lin metre
	UFC55X---	COL	0.55	lin metre	
	Stramit® Hookover	Length 2.4m			
		PHO40ZA	ZA	0.40	lin metre
	PHO40X---	COL	0.40	lin metre	
	Stramit® Secret Gutter	Length 2.4m			
		SG40ZA	ZA	0.40	lin metre
	Stramit® Rolled Barge				
		RTB20055ZA	ZA	0.55	lin metre
	RTB20055X---	COL	0.55	lin metre	


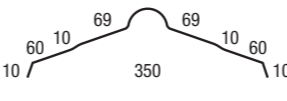
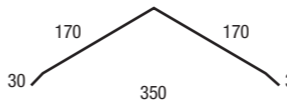
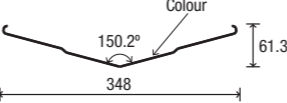
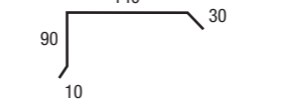
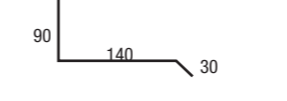
CURVED ROOFING • TANK IRON • ACCESSORIES

Product Curved Roofing/Tank Iron/Accessories	Product Details	Code	Finish	BMT mm	Unit
Stramit® Curved Roofing	Material costs only	CQ60ZA	ZA	0.60	sq m
		CQ60X---	COL	0.60	sq m
	Curving cost per sheet				
		762 Nominal Cover			
Lead Time: 5 working days. NOTE: Lengths under 1 metre will be subject to a cutting charge.					
Tank Iron	Aquaplate® steel "W"	CT72060AQGA	GA	0.60	sq m
	Aquaplate® steel "W"	CT72060AQ---	COL	0.60	sq m
	Colours available - Pale Eucalypt®, Paperbark®				
		762			
	Flat Sheet Tank Base	FSTB120060AQGA	GA	0.60	sq m
	Flat Sheet Tank Lid	FSTL120060AQGA	GA	0.60	sq m


MONOCLAD • ROOFING • CLADDING • ACCESSORIES

Product Roofing/Cladding/Accessories	Product Details	Code	Finish	BMT mm	Unit
Stramit Monoclad®					
 <p>762 Nominal Cover</p>		MC42ZA	ZA	0.42	per m ²
		MC48ZA	ZA	0.48	per m ²
		MC42X---	COL	0.42	per m ²
		MC48X---	COL	0.48	per m ²
		MC42RRX---	COL	0.42	per m ²
		MC42DH	Double Sided	0.42	per m ²
		MC42KWHN	Coolmax®	0.42	per m ²
		MC48KWHN	Coolmax®	0.48	per m ²
		MC42IOWHP11	Perforated OW only	0.42	per m ²
		MC42U---	Ultra	0.42	per m ²
	MC48U---	Ultra	0.48	per m ²	
	MC48M---	Metallic	0.48	per m ²	
	MC42T---	Matt	0.42	per m ²	
	MC42ZM8---	Magnaflow	0.42	per m ²	
Stramit Monoclad® wall sheeting					
Light Gauge					
 <p>762 Nominal Cover</p>		MC35ZA	ZA	0.35	sq m
		MC35X---	COL	0.35	sq m
Only suitable for wall cladding.					
Translucent Roof Sheeting to suit	Fibreglass	TSFGMC18---		1800gsm (6oz)	lin metre
	Ice Clear, Opal, Haze Green	TSFGMC24---		2400gsm (8oz)	lin metre
Stramit Monoclad® sheeting profile					
	<i>Lengths over 11.9m incur extra delivery charges</i>				
 <p>Clear, Grey, Opal, Light Bronze and Dark Tint</p>	Polycarbonate	TSPCMC---18		1800mm length	0.80 each
		TSPCMC---21		2100mm length	0.80 each
		TSPCMC---24		2400mm length	0.80 each
		TSPCMC---27		2700mm length	0.80 each
		TSPCMC---30		3000mm length	0.80 each
		TSPCMC---36		3600mm length	0.80 each
		TSPCMC---42		4200mm length	0.80 each
		TSPCMC---48		4800mm length	0.80 each
		TSPCMC---54		5400mm length	0.80 each
		TSPCMC---60		6000mm length	0.80 each
		TSPCMC---72		7200mm length	0.80 each
		TSPCMC---81		8100mm length	0.80 each
	Note: Not all lengths available in all colours				
Polycarbonate Washers		TSFGWW32H			pkt 100
Accessories					
Suit Stramit Monoclad® sheeting profile					
	Superseal Filler Strip (under eave)	MCEFSBTM		900mm	Black each
	Superseal Filler Strip (under ridge)	MCEFSTOP		900mm	Black each
	M6 x 65 Hex Head SDS (for crest fixing to timber and steel)	S0665HZIP4H	Plain		per pack100
		S0665HZIP4	Plain		per box 1000
		S0665HZIP---4H	Colour		per pack 100
		S0665HZIP---4	Colour		per box 1000
Note: Not all colours kept in stock please check availability at time of order.					


MONOCLAD • FLASHINGS

Product Roofing/Cladding/Accessories/Flashings	Product Details	Code	Finish	BMT mm	Unit
Flashings					
Stramit® Roll Top Ridge Cap  <p>with 10mm, 30mm, breaks</p>	Custom Made	RTR30B40ZA	ZA	0.40	lin metre
		RTR30B40X---	COL	0.40	lin metre
Stramit® Stepped Roll Top Ridge Cap  <p>Reverse Roll</p>	Custom Made	RTRRIB40ZA	ZA	0.40	lin metre
		RTRRIB40X---	COL	0.40	lin metre
		RTRRIB55ZA	ZA	0.55	lin metre
		RTRRIB55X---	COL	0.55	lin metre
Stramit® Flat Top Ridge Cap  <p>Reverse Roll</p>	Custom Made	RFMC40ZA	ZA	0.40	lin metre
	30mm, breaks	RFMC40X---	COL	0.40	lin metre
		RFMC40RRX---	COL	0.40	lin metre
Stramit® Valley Gutter 	Custom Made	VRIBWA40ZA	ZA	0.40	lin metre
		VRIBWA40X---	COL	0.40	lin metre
		VPF55ZA	ZA	0.55	lin metre
		VPF55X---	COL	0.55	lin metre
Stramit® Barge Capping  <p>30mm, breaks</p>	Custom Made	BFMC40ZA	ZA	0.40	lin metre
		BFMC40X---	COL	0.40	lin metre
Stramit® Under Flashings  <p>30mm, breaks</p>	Custom Made	UFMC30040ZA	ZA	0.40	lin metre
		UFMC30040X---	COL	0.40	lin metre




LONGSPAN • ROOFING • CLADDING • ACCESSORIES

Product Roofing/Cladding/Accessories/Flashings	Product Details	Code	Finish	BMT	Unit
 <p>700 Nominal Cover</p>	Stramit Longspan®	LS42ZA	ZA	0.42	per m ²
		LS42ZA	ZA	0.42	per m ²
		LS42X---	COL	0.42	per m ²
		LS48X---	COL	0.48	per m ²
		LS42DH---	COL Double Sided	0.42	per m ²
		LS42KWHN	Coolmax®	0.42	per m ²
		LS48KWHN	Coolmax®	0.48	per m ²
		LS42U---	Ultra	0.42	per m ²
		LS48U---	Ultra	0.48	per m ²
		LS48M---	Metallic	0.48	per m ²
	LS42T---	Matt	0.42	per m ²	
	LS42ZM8---	Magnaflow	0.42	per m ²	
Polycarbonate Washers		TSFGWW32H			pkt 100
Accessories	Suit Stramit Longspan® sheeting profile				
	Eave Fill Strip Bottom	LSEFSBTM	915mm		each
	Eave Fill Strip Top	LSEFSTOP	915mm		each

ROOFING • ACCESSORIES

Product Roofing/Accessories	Product Details	Code	Finish	Stock Length	BMT mm	Unit
Stramit Longspan® Gutter Board		LS42ZA60	ZA	6.0 m	0.42	per length
 <p>700 Nominal Cover</p>	Fasteners - Class 4	M6 x 65 Hex Head SDS	S0665HZIP4H	Plain		per 100
		(for crest fixing to timber and steel)	S0665HZIP4	Plain		per 1000
			S0665HZIP---4H	Painted		per 100
			S0665HZIP---4	Painted		per 1000
	Note: Not all colours kept in stock please check availability at time of order.					

LONGSPAN • FLASHINGS

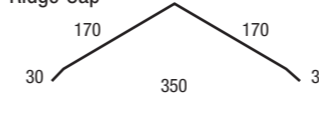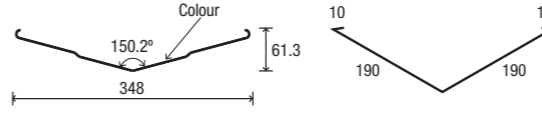Product Roofing/Cladding/Accessories/Flashings	Product Details	Code	Finish	BMT mm	Unit
	Stramit® Flat Top	RFMC40ZA	ZA		lin metre
	Ridge Cap	RFMC40X---	COL		lin metre
	Stramit® Valley Gutter	Custom Made			
		VRIBWA40ZA	ZA	0.40	lin metre
		VRIBWA40X---	COL	0.40	lin metre
		VPF55ZA	ZA	0.55	lin metre
	VPF55X---	COL	0.55	lin metre	
	Stramit® Under Flashings	Custom Made			
		UFMC30040ZA	ZA	0.40	lin metre
		UFMC30040X---	COL	0.40	lin metre

MINIRIB + MINISEAM • CLADDING • ACCESSORIES

Product Cladding/Accessories	Product Details	Code	Finish	BMT mm	Unit
Stramit Minirib® 		MR42ZA	ZA	0.42	sq m
		MR42X---	COL	0.42	sq m
		MR42T---	Matt	0.42	sq m

NOTE:
Minimum length 1 metre
Maximum length 8 metres

Stramit Miniseam™ 		MRS42ZA	ZA	0.42	sq m
		MRS42X---	COL	0.42	sq m
		MRS42T---	Matt	0.42	sq m

NOTE:
Minimum length 1 metre
Maximum length 8 metres

Stramit Minirib® Profiled Flashing 		BFMR01ZA	ZA	0.55	lin metre
		BFMR01X ---	COL	0.55	lin metre
		BFMR01U ---	Ultra	0.55	lin metre
		BFMR02ZA	ZA	0.55	lin metre
		BFMR02X ---	COL	0.55	lin metre
		BFMR02U ---	Ultra	0.55	lin metre
		BFMR03ZA	ZA	0.55	lin metre
		BFMR03X ---	COL	0.55	lin metre
		BFMR03U ---	Ultra	0.55	lin metre
		BFMR04ZA	ZA	0.55	lin metre
		BFMR04X ---	COL	0.55	lin metre
		BFMR04U ---	Ultra	0.55	lin metre
		BFMR05ZA	ZA	0.55	lin metre
		BFMR05X ---	COL	0.55	lin metre
		BFMR05U ---	Ultra	0.55	lin metre

GENERAL ACCESSORIES

Product General Accessories	Product Details	Code	Finish	Unit
Fasteners 	Pop Rivets 3.2 x 7.5mm (4-3)	PR3275	ZA	pkt 100
		PR3275---	Painted	pkt 100
		PR3275ALBX	ZA	Box 1000
		PR3275---BX	Painted	Box 1000

Flumes with Flange (Stormproof) 	600 x 150 x 0.40 to suit 24 or 25 deg roof pitch	FLUMSTM24CNZA	ZA	each
		FLUMSTM24CNX---	COL	each
	600 x 150 x 0.40	FLUMSTM CNZA	ZA	each
	600 x 150 x 0.40	FLUMSTM CNX---	COL	each
Pre-punched flumes Flashing 600mm		FLUMFCPPZA	ZA	each
		FLUMFCPPX---	COL	each
Non-notched Flume to Suit 24° roof pitch	600 x 150 x 0.40	FLUMSTM24ZA	ZA	each
	600 x 150 x 0.40	FLUMSTM24X---	COL	each
Non-notched Flume	600 x 150 x 0.40	FLUMSTMZA	ZA	each
	600 x 150 x 0.40	FLUMSTM---	COL	each
Ember-Shield Corrie-notched	600 x 150 x 0.40	FLUMSTMESCZA	ZA	each
	600 x 150 x 0.40	FLUMSTMESCX---	COL	each
Ultra Finish	600 x 150 x 0.55	FLUMSTMU---	Ultra	each

Roof Vent 	300mm	RV300MF	Plain	each
	300mm	RV300---	COL	each

Stramit® Rainheads 	Size - Contact your local Stramit Office			
	Size - Contact your local Stramit Office			
	200 x 200 x 200	RWH200200200ZA	ZA	each
	200 x 200 x 200	RWH200200200---	COL	each



Stramit® Sumps 	Size - Contact your local Stramit Office		ZA	each
	Size - Contact your local Stramit Office		COL	each

GENERAL ACCESSORIES

Product General Accessories	Product Details	Code	Finish	Unit
Adjustable Box Gutter Brackets	250-400	BGBA1EAZA	ZA	each
	401-650	BGBA2EAZA	ZA	each
	651-1000	BGBA3EAZA	ZA	each
Builder's Strap	32 x 1.2 x 30	BST321230		each
	32 x 1.2 x 50	BST321250		each
	32 x 1.6 x 30	BST321630		each
	38 x 1.2 x 30	BST381230		each
	38 x 1.2 x 50	BST381250		each
	50 x 1.2 x 50	BST501250		each
Dektite Watertight flashing for metal roof penetrations	No.1 5-55mm	DEK1BLK	Black	each
	No.2 50-70mm	DEK2BLK	Black	each
	No.3 5-127mm	DEK3BLK	Black	each
	No.4 75-175mm	DEK4BLK	Black	each
	No.5 100-200mm	DEK5BLK	Black	each
	No.6 125-230mm	DEK6BLK	Black	each
	No.7 150-300mm	DEK7BLK	Black	each
	No.1 5-55mm	DEK1GRY	Grey	each
	No.2 50-70mm	DEK2GRY	Grey	each
	No.3 5-127mm	DEK3GRY	Grey	each
	No.4 75-175mm	DEK4GRY	Grey	each
	No.5 100-200mm	DEK5GRY	Grey	each
	No.6 125-230mm	DEK6GRY	Grey	each
	No.7 150-300mm	DEK7GRY	Grey	each
Dimension is pipe outside diameter				
Wakaflex Flexible roof flashing	280mm x 5.0m	FRF280BLK50	Black	each
	280mm x 5.0m	FRF280BRN50	Brown	each
	280mm x 5.0m	FRF280GRY50	Grey	each
	280mm x 5.0m	FRF280TCA50	Terracotta	each
Silicone Sealant		SILCLR	Clear	each
		SILGRY	Grey	each

NOTE: Also known as "box gutter saddles"

Available individually or boxes of 20

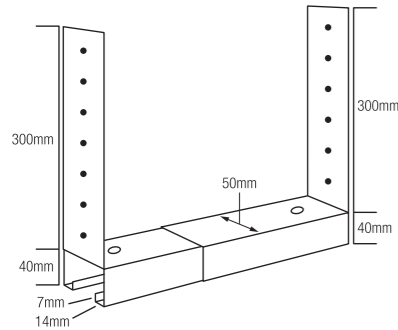

CLADDING • ACCESSORIES

Product Cladding/Accessories	Product Details	Code	Finish	BMT mm	Unit
Stramit Mini Corry®		MK42ZA	ZA	0.42	per m ²
		MK42X---	COL	0.42	per m ²
		MK42ZA12	ZA	0.42	each - Stock length 1.2
		MK42ZA18	ZA	0.42	each - Stock length 1.8
		MK42ZA24	ZA	0.42	each - Stock length 2.4
		MK42ZA36	ZA	0.42	each - Stock length 3.6

Maximum Length 6m or on truck limitations.

NOTE: **Stramit Mini Corry®** panelling available ex East (allow 7-10 working days). Minimum order quantity applies

Product Cladding/Accessories	Product Details	Code	Finish	BMT mm	Unit
Stramit K-Panel®	13Rib	KP35ZA	ZA	0.35	per m ²
		KP35X---	COL	0.35	per m ²


Recommended maximum length 6.0m

Intended for wall cladding only. Not suitable for roofing.





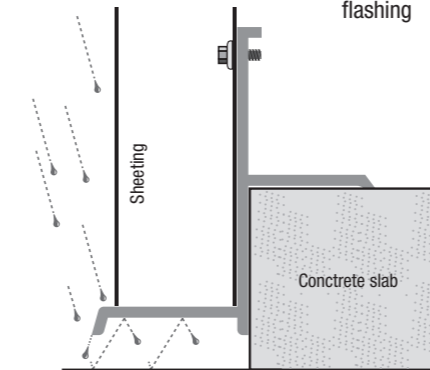


NOTE: **Stramit K-Panel®** available ex East (allow 7-10 working days). Minimum order quantity applies

VERMASEAL

Product Flooring/Accessories	Details	Code	BMT mm	Unit
Stramit® Flooring Vermaseal	Vermin and weatherproof flashing	VMSEALGRY30 Grey (3 metre lengths)		per 3 metres







FASTENERS • ACCESSORIES

Product Fasteners/Accessories	Product Details	Code	Finish	Unit
	12 x 30 Hex Head	S1230HT---	Painted	per 1000
	12 x 20 Hex Head SDS Class 4	S1220HT4 S1220HT---4	Painted	per 500 per 500
	10 x 16 Hex Head SDS Class 4 (for valley fixing to steel) Class 4 (for valley fixing to steel)	S1016HT4 S1016HT---4	Painted	per 1000 per 1000
	12 x 25 Hex Head SDS Type 17 Class 4 (for crest fixing to timber) Class 4 (for crest fixing to timber)	S1225H174 S1225H17---4	Painted	per 500 per 500
	12 x 50 Hex Head SDS Type 17 (for crest fixing to timber) (for crest fixing to timber)	S1250H174 S1250H17---4	Painted	per 1000 per 1000
	12 x 65 Hex Head Type 17 (for crest fixing to timber)	S1265H174 S1265H17---4	Class 4 Painted	per 1000 per 1000
	Skylight Washer M6 x 65 Hex Zip Class 4 suit Stramit Corrugated/Monoclad	S0665HZIP4 S0665HZIP---4	Painted	per 1000 per 1000
	Roof Zip M6 x 50 Hex Zip Class 4	S0650HZIP---4	Painted	per 1000
	M6 11 x 50 Hex Roof Zip Hi-Grip & Seal Class 5	S0650HZIP5 S0650HZIP---5	Painted	per 1000 per 1000
	Ridge Assembly 6 x 55 Hex Zip 25 BW Class 4	S1455HZPB25 S1455HZPB25---	Painted	per 250 per 250
	14 x 55 Hex Cyclonic Rooflok Zip Square Lok Class 4 Corrie & Square Profile	S1455HZPCA4 S1455HZPCA---4	Painted	per 250 per 250


Prices subject to increase without notification. NOTE: Minimum order quantity applies.

FASTENERS • ACCESSORIES

Product Fasteners/Accessories	Product Details	Code	Finish	Unit
	Fasteners for fixing Polycarbonate			
	M6.5 (14g) - 14 x 50mm Hex Washer Face with 26mm EPDM Seal	TSPC0650DW26PK		per 50
	Fasteners for fixing Fibreglass			
	M6.5 (14g) - 14 x 65mm Hex Washer Face with 32mm Weatherlock Washer			
Rivets	Pop Rivets 3.2 x 7.5mm (4-3)	PR3275 PR3275---	ZA COL	pkt 100 pkt 100
		PR3275ALBX PR3275---BX	ZA COL	per 1000 per 1000
Fasteners	12 x 30 Hex Head No Neo Self Drilling/Tapping (for fixing to metal)	S1230HTNN		per 1000
				
Nylon Anchors	5mm x 25mm	NYAN0525 NYAN06538		per 100 per 100
Stitching Screws	8 x 16 Hex Tek	S0816HTNN		per 1000

PATIO COMPONENTS

Product	Product Details	Code	Finish	Unit
Roofing/Cladding/Accessories				
Stramit® Patio Back Angle	50 x 50	BAF505012GA	GA	per metre
	50 x 30	BAF503012I---24	Stock Length 2.4	each
	50 x 30	BAF503012I---30	Stock Length 3.0	each
	50 x 30	BAF503012I---45	Stock Length 4.5	each
	50 x 30	AF503012GA	GA	per metre
*Available in Off White, Wheat & Smooth Cream.				
Stramit® Easiline Patio	Cut to length	EPGUZA EPGUX---	ZA COL	per metre per metre
	ECSA = 6800mm ² Corners (Internal)	EPGUICZA EPGUICX---	ZA COL	each each
		Corners (External)	EPGUECZA EPGUECX---	ZA COL
	Stop Ends		ELGUSEZA ELGUSEX---	ZA COL



All standard colours available.

FLAT SHEET

Product	Product Details	Code	Finish	BMT	Unit
Roofing/Accessories					
Stramit® Flat Sheet		FS120040ZA	ZA	0.40	m
		FS120040X---	COL	0.40	m
		FS120055ZA	ZA	0.55	m
		FS120055X---	COL	0.55	m

MAGNAFLOW® • ROOFING • CLADDING • RAINWATER

PRODUCT – Roofing/Cladding/Rainwater	BMT (mm)
Stramit® Corrugated	0.42
Stramit Monoclad®	0.42
Stramit Longspan®	0.42
Stramit Speed Deck Ultra®	0.42
Stramit® Roll Top Ridge	0.42 / 0.55
Stramit® Valley Folded	0.55
Stramit® Flashings & Others	0.55
Stramit® Downpipes 95 x 45	0.55
Stramit® Downpipes 100 x 50	0.55
Stramit® Downpipes 100 x 75	0.55
Stramit® Downpipes 100 x 100	0.55

Please refer to Sales office for lead times and availability.

MagnaFlow® sheeting is a highly durable prepainted sheet steel system suitable for use in corrosive environments for roofing, walling and rainwater products. The protective metallic coating on the base steel is a new technology in accordance with AS1397 -2011. This coating provides the added durability of the MagnaFlow® product.

Please enquire at your local Stramit office to confirm colour availability.

SUBSTRATE

The coating on the steel substrate complies with the coating classes as specified in AS 1397 – 2011: Continuous Hot Dipped Metallic Coated Steel Sheet and Strip – Coatings of Zinc, and Zinc Alloyed with Aluminium and Magnesium. The MagnaFlow® coating comprises zinc, aluminium and magnesium and delivers more durable site performance than standard zinc or Zinc/aluminium systems. Minimum coating mass is 240gsm.

RECOMMENDED END USES

MagnaFlow® paint systems have a very good colour and gloss retention and are suitable for roofing, cladding and rainwater goods. It is ideal for animal shelters, flashings, interior uses, and exterior environments where corrosion levels are moderate. It is also suitable for fencing applications.



MAGNAFLOW® WARRANTIES

A range of warranties are available to support MagnaFlow® products for various exposure conditions. Please contact your local Stramit office for details.

THE MAGIC OF MAGNESIUM

All steel roofs are susceptible to the elements along cut edges however the addition of magnesium to the standard zinc/aluminium alloy in MagnaFlow® products provides superior corrosion resistance in this area. As time goes on it allows the protective metal coating to microscopically flow over the cut edge. At this point a sacrificial anticorrosive reaction takes place and a robust seal is created.

Anticorrosive reaction of MagnaFlow® products

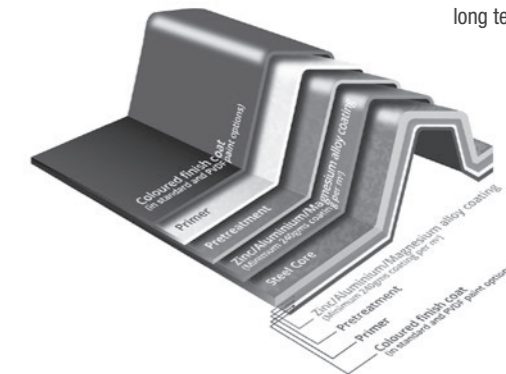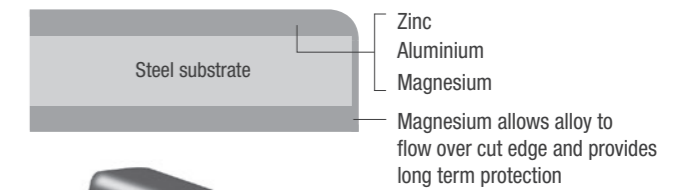

PRODUCT AVAILABILITY - MAGNAFLOW COLOURS


Product	BMT (mm)	Magnaflow Colours ZM8 ***										
		AGY	BCH	MLH	OWH	SLG	GUL	SCM	CFG	HRD	MGN	MBL
Roofing	0.42	Y	POA	Y	Y	Y	CHECK	POA	POA	POA	POA	POA
	0.48	POA	POA	Y	Y	Y	POA	POA	POA	POA	POA	POA
Fascia	0.42	Y	Y	POA	Y	Y	POA	Y	POA	POA	POA	POA
QLD Quad / 150 Half Rnd	0.42	Y	Y	POA	Y	Y	POA	POA	POA	POA	POA	POA
M Gutter	0.42	Y	Y	POA	Y	Y	POA	Y	POA	POA	POA	POA
Quad 175	0.55	POA	POA	POA	POA	POA	POA	POA	POA	POA	POA	POA
Flashings	0.55	Y	Y	Y	Y	Y	POA	POA	POA	POA	POA	POA

MAGNAFLOW COLOUR NAMES

AGY Armour Grey	SLG Slate Grey	HRD Heritage Red
BCH Birch	GUL Gull Grey	MGN Mist Green
MLH Monolith	SCM Smooth Cream	MBL Mountain Blue
OWH Off White	CFG Caulfield Cream	


FORMWORK • ACCESSORIES

Product	Product Details	Code	Finish	BMT mm	Unit
Stramit Condeck HP®	300mm effective cover	CONHP75GA	GA	0.75	sq m
		CONHP100GA	GA	1.00	sq m
	Low Glare	CONHP100LG	LG	1.00	sq m




Note:
Minimum length 1 metre
Maximum length 15.4 metres
Longer lengths by negotiation

Stramit® HP Plus Accessory	Condeck HP® Plus	CONHPP100GA	GA	1.00	lin metre
----------------------------	------------------	-------------	----	------	-----------



Note: Cut to length


Stramit® Edgeforma	Height	Code	Finish	BMT mm	Unit
	100mm	CONEF100GA		0.95	lin metre
	125mm	CONEF125GA		0.95	lin metre
	150mm	CONEF150GA		0.95	lin metre
	175mm	CONEF175GA		0.95	lin metre
	200mm	CONEF200GA		0.95	lin metre
	250mm	CONEF250GA		1.20	lin metre



Available cut to length to of 4.5m at listed rates.
*Stramit® Edgeforma can be custom made to slab height.

Ceiling Hangers (Pair)	CONEHANG				each
------------------------	----------	--	--	--	------

Single Span maximum span (mm)		
slab thickness (mm)	Stramit Condeck HP® decking thickness	
	0.75mm	1.00mm
90	2100	2450
100	2040	2380
110	1990	2310
120	1940	2250
125	1920	2220
130	1900	2200
140	1860	2150
150	1820	2100
160	1780	2060
170	1750	2020
180	1720	1990
190	1690	1960
200	1660	1920
210	1610	1890
220	1600	1870
230	1580	1840
240	1560	1820
250	1540	1790

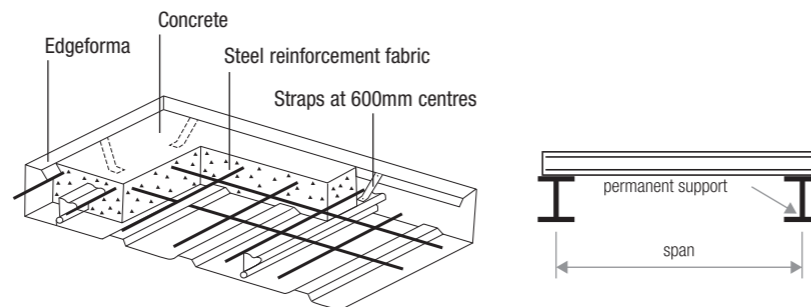

Span tables for temporary props

Calculated for concrete density of 2400 kg/m³, reo mass 50 kg/m³, stacked material load of 1.5kPa in pans, 100mm wide prop bearers and rib deflection limit of span/240. Maximum spans for finished composite slabs must be checked using the **Stramit Condeck HP® Technical Manual** or the **Stramit Condeck HP™ Slab Designer** software. Props or propping frames must be spaced approximately equally within the span.

— Cases below this line not recommended for exposed ceilings

PURLINS & GIRTS

Product	Product Details	Code Standard	Code Exacta	BMT mm	Unit
Stramit® C & Z Purlins (Z350 Coating)	C & Z 10010 Sections	C/Z10010*	NA	1.0	per metre
	C & Z 10012 Sections	C/Z10012*	NA	1.2	per metre
	C & Z 10015 Sections	C/Z10015*	NA	1.5	per metre
	C & Z 10019 Sections	C/Z10019*	NA	1.9	per metre
	C & Z 15010 Sections	NA	•C/Z15010EX*	1.0	per metre
	C & Z 15012 Sections	C/Z15012*	C/Z15012EX*	1.2	per metre
	C & Z 15015 Sections	C/Z15015*	C/Z15015EX*	1.5	per metre
	C & Z 15019 Sections	C/Z15019*	C/Z15019EX*	1.9	per metre
	C & Z 15024 Sections	C/Z15024*	C/Z15024EX*	2.4	per metre
	C & Z 20012 Sections	NA	•C/Z20012EX*	1.2	per metre
	C & Z 20015 Sections	C/Z20015*	C/Z20015EX*	1.5	per metre
	C & Z 20019 Sections	C/Z20019*	C/Z20019EX*	1.9	per metre
	C & Z 20024 Sections	C/Z20024*	C/Z20024EX*	2.4	per metre
	C & Z 25015 Sections	NA	•C/Z25015EX*	1.5	per metre
	C & Z 25019 Sections	C/Z25019*	C/Z25019EX*	1.9	per metre
C & Z 25024 Sections	C/Z25024*	C/Z25024EX*	2.4	per metre	
C & Z 30019 Sections	NA	•C/Z30019EX* Ex Qld	1.9	per metre	
C & Z 30024 Sections	C/Z30024*	C/Z30024EX* Ex Qld	2.4	per metre	
C & Z 30030 Sections	C/Z30030*	C/Z30030EX* Ex Qld	3.0	per metre	
C & Z 35030 Sections	C/Z35030*	C/Z35030EX* Ex Qld	3.0	per metre	
C & Z 40030 Sections	C/Z40030*	NA	3.0	per metre	

*P = PUNCHED U = UNPUNCHED EXP = EXACTA PUNCHED EXU = EXACTA UNPUNCHED

NOTE:
Minimum length 1.5 metres
Maximum length 15 metres

NOTES: Sizes over 300 and above require longer lead times.

Standard coating is Z350. Heavy Duty Z450 coating available subject to special order (POA).

LIMITED STOCK AVAILABLE IN THE FOLLOWING SIZES:

C 10012 Unpunched 8000	C10012U8000	NA	1.2	each
C 10015 Unpunched 8000	C10015U8000	NA	1.5	each
C 15015 Unpunched 8000	C15015U8000	NA	1.5	each
Z 15015 Unpunched 8000	Z15015U8000	NA	1.5	each
C 15019 Unpunched 8000	C15019U8000	NA	1.9	each
C 20019 Unpunched 8000	C20019U8000	NA	1.9	each

Stramit Exacta® C&Z Purlins are subtly but importantly different to standard Stramit® Z&C purlins. The distinction between the two types is that **Stramit Exacta® C&Z** Purlins have been performance optimised for the most commonly used spans. This simple change, enabled by Stramit's state-of-the-art manufacturing equipment and high standards of quality control, can lead to capacity improvements of up to 18%.

Complimentary **Stramit® EX-facta™** moment capacity design software is available for alternative purlin span configurations.

ZAM®

New high-tech coating for severe environments

Stramit Building Products now offers the next generation of steel purlin and Condeck HP product manufactured from ZAM coated steel.

ZAM® is a technologically advanced coated steel that allows new installation possibilities in corrosive environments. By replacing the need for post-galvanising, ZAM® products also lower material costs and reduce project lead times.

ZAM® coated steel offers better corrosion protection than conventional galvanised steel (around three times the design life) at a lower cost than products with comparable performance.

ZAM® products perform well in salt or marine atmospheres and are superior to galvanised steel in acid rain, sulphur dioxide or ammonia conditions. They also perform well in alkaline environments. They are appropriate for use near marine environments, in enclosed swimming pool complexes, in poultry, cattle and pig shed environments, as well as in high industrial environments.

The superior scratch resistance of ZAM® products helps corrosion resistance in applications subject to repeated wear. ZAM® coated steel is also concrete compatible, making it an ideal material for steel formwork decking products.

ZAM® is offered by Stramit Building Products with up to a 20 year warranty, subject to standard terms and conditions. Call Stramit Building Products for more information.

ZAM HIGH DURABILITY PURLINS

Product C & Z Purlins	Details	Code	kg/m	M/tonne	BMT (mm)	Unit
ZAM High Durability Purlins	C & Z 10015 Sections	C/Z10015*IZM	2.635	379	1.5	per metre
	C & Z 10019 Sections	C/Z10019*IZM	3.310	302	1.9	per metre
	C & Z 15015 Sections	C/Z15015*IZM	3.562	281	1.5	per metre
	C & Z 15019 Sections	C/Z15019*IZM	4.488	223	1.9	per metre
	C & Z 15024 Sections	C/Z15024*IZM	5.750	174	2.4	per metre
	C & Z 20015 Sections	C/Z20015*IZM	4.534	221	1.5	per metre
	C & Z 20019 Sections	C/Z20019*IZM	5.705	175	1.9	per metre
	C & Z 20024 Sections	C/Z20024*IZM	7.177	139	2.4	per metre
	C & Z 25019 Sections	C/Z25019*IZM	6.466	155	1.9	per metre
	C & Z 25024 Sections	C/Z25024*IZM	8.134	123	2.4	per metre
	C & Z 30030 Sections	C/Z30030*IZM	12.640	79	3.0	per metre

* Substitute * for P = PUNCHED U = UNPUNCHED EXP = EXACTA PUNCHED EXU = EXACTA UNPUNCHED
Check coil availability - extended lead times may apply
Other sizes and gauges may be available subject to mill lead times and quantities
Min 1.7m length
Cutback fee for lengths under 1.7m - item code is CUTBACKLTH

Purlins Ordering Available to order on approximately 3-5 days lead time subject to delivery days. No extra charge for hole punching. Notching and mitre cut charges do apply – POA. Allow 2 extra days.

ZAM Durability Statement (Date of issue 15 June 2004)

This statement is issued to Stramit® Building Products Pty Ltd by Nisshin Steel Co., Ltd on 15 June 2004 and states the expected durability of Nisshin Steel Co., Ltd corrosion resistant hot dip coated steel sheeting product ZAM™.

Performance

The corrosion resistance of ZAM coating is a minimum 3 times that of galvanised steel sheet. ZAM materials are made in accordance with AS 1397, purlins have a ZM350 coating and Condeck HP a ZM275 coating of protective, zinc, aluminium and magnesium. All ZAM products have the same material strength as normal product, and the normal purlin and Condeck HP load tables are valid when used with the ZAM material.

Typical Application

The superior corrosion resistance of ZAM coating means that it can replace hot dip galvanised steel. Applications are whenever severe and corrosive environments exist: intensive farming, agricultural applications, concrete contact and coastal applications.

ZAM, the highly corrosion-resistant hot dip coated steel sheet, is

- A new hot dip coated steel that has a coating layer of zinc, aluminium 6% and magnesium 3%
- The designation “ZAM” comes from the initials of its constituent elements Zinc, Aluminium, and Magnesium.

CUSTOM SECTIONS

Stramit® Custom Sections

GENERAL

At the forefront of technology, Stramit has designed the latest in computer technology roll forming equipment. This technology allows quick and easy profile changes to be made within the production cycle. This allows the production of special purlins or other shapes designed specifically for individual projects giving the best balance in performance and economy.

SIZE RANGE

Sections can be produced within the following parameters:

Web size	100mm	–	400mm
Flange size	30mm	–	130mm
Lip size	9mm	–	35mm *
Thickness	1.0mm	–	3.0mm
Material type	G300	–	G550 #

*Zero lip (i.e. plain channels) also available.

May vary dependent upon material thickness.

MODIFIED PURLINS

Modified purlins, Z, C or plain channel, use existing strip widths. This advantage of modifying sections within the bounds of existing strip materials allows improvements in performance – either strength or deflection – with ready access to available materials.

Lead times are, particularly if standard flange sizes are used, no more than for normal purlin orders.

CUSTOM SHAPES

Designed for specific purposes, these sections may be used for a variety of applications but usually require a specific strip size, which requires extended lead times for ordering and are subject to a minimum order quantity criteria.

TOOLING

Contact your local Stramit office for cost estimates for tooling of special flange sizes and any special holes.


HOLES

The facility to provide special holes at almost any location is also available.

LOAD TABLES

Section properties and load tables for modified or custom profiles may be possible for larger projects by means of the latest in computer programs written for this purpose.

SIZES AVAILABLE

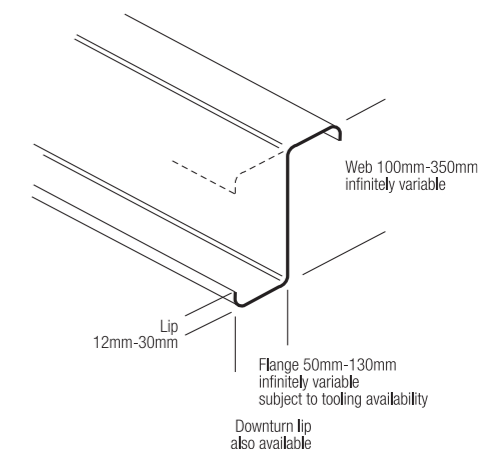

DOWNTURN LIP – Standard & Lapped Z
These features are available on purlin projects – POA

Custom Sections Subject to special enquiry – POA. They are cut to length, custom punched from galvanised material. Alternative materials are available upon request.

STRAMIT® PURLIN DIMENSIONS

C SECTIONS						Z SECTIONS						
Section	Web Depth mm	Flange Width mm	Lip Length mm	Thickness BMT mm	Section Mass kg/m	Section	Web Depth mm	Broad Flange mm	Narrow Flange mm	Lip Length mm	Thickness BMT mm	Section Mass kg/m
C10010	102	51	12.5	1.0	1.74	Z10010	102	53	49	12.5	1.0	1.74
C10012	102	51	13.0	1.2	2.07	Z10012	102	53	49	13.0	1.2	2.07
C10015	102	51	14.0	1.5	2.58	Z10015	102	53	49	14.0	1.5	2.58
C10019	102	51	15.0	1.9	3.25	Z10019	102	53	49	15.0	1.9	3.25
C15012	152	64	15.0	1.2	2.84	Z15012	152	65	61	15.0	1.2	2.84
C15015	152	64	16.0	1.5	3.54	Z15015	152	65	61	16.0	1.5	3.54
C15019	152	64	17.0	1.9	4.46	Z15019	152	65	61	17.0	1.9	4.46
C15024	152	64	18.5	2.4	5.62	Z15024	152	65	61	18.5	2.4	5.62
C20015	203	76	16.0	1.5	4.44	Z20015	203	79	74	16.0	1.5	4.44
C20019	203	76	19.5	1.9	5.68	Z20019	203	79	74	19.5	1.9	5.68
C20024	203	76	21.0	2.4	7.15	Z20024	203	79	74	21.0	2.4	7.15
C25019	254	76	19.0	1.9	6.43	Z25019	254	79	74	19.0	1.9	6.43
C25024	254	76	20.5	2.4	8.10	Z25024	254	79	74	20.5	2.4	8.10
C30024	300	96	28.0	2.4	10.01	Z30024	300	100	93	28.0	2.4	10.01
C30030	300	96	31.5	3.0	12.60	Z35024	350	129	121	27.0	2.4	12.10
C35024	350	125	27.0	2.4	12.10	Z35030	350	129	121	30.0	3.0	15.09
C35030	350	125	30.0	3.0	15.09							
C40024	400	96	30.5	2.4	12.10							
C40030	400	96	32.5	3.0	15.09							

BRIDGING • ACCESSORIES

Product Bridging/Accessories	Product Details	Code	Unit
	General Purpose Bracket	BGPB100GA	each
		BGPB150GA	each
		BGPB200GA	each
		BGPB250GA	each
	Clamp Plate	BCP100GA	each
		BCP150GA	each
		BCP200GA	each
		BCP250GA	each
	Angle Connector	BAC100	each
		BAC150	each
		BAC200	each
		BAC250	each
	Raking Girt Bracket	BRGB---	each
	Tie Rod Angle	BTRA	each
	M12 x 30 (Grade 4.6)	PB1230ZP	each
	M16 x 45 (Grade 4.6)	PB1645ZP	each
	Fascia Bolt	PBF1230GA	each
Miscellaneous	Purlin Flaring	PURLBENDM	per metre

BRIDGING • ACCESSORIES

Product Bridging/Accessories	Product Details	Code	Unit		
Stramit® Bridging Suit 100 to 250 Purlin					
	Intermediate Bridging	BI100 BI150/BI150IZM BI200/BI200IZM BI250/BI250IZM	per metre		
		Offset Bridging	BIS100 BIS150 BIS200 BIS250	per metre	
			Ridge Bridging	BR100 BR150 BR200 BR250	per metre
				Fascia Bridging	BF100 BF150 BF200 BF250
	Girt Hanger			BGHTB100 BGHTB150 BGHTB200 BGHTB250	per metre
				Girt Foot	BGF100 BGF150 BGF200 BGF250
			Tie Rod 12mm	BSR12	per metre
			Lock	BLK100/BLK100IZM BLK150/BLK150IZM BLK200/BLK200IZM BLK250/BLK250IZM	each
	Locator		BLR100/BLR100IZM BLR150/BLR150IZM BLR200/BLR200IZM BLR250/BLR250IZM	each	
			Starter Clip	BSC100 BSC150/BSC150IZM BSC200 BSC250/BSC250IZM	each

Bridging Installation Guide

Good Practice

Stramit recommends that good trade practice be followed when using these products. Examples can be found in AS3828, ASI/Australian Standards HB39 and state regulations and guidelines, and work practices.

Inspection

Inspection of purlins and girts should be carried out prior to installation. The ease of inspection, and cost and time lost if remedial action is required, will be substantially less favourable once the purlins have been installed.

Inspection should comprise of checks that labelling is in line with specifications and detailing, and that the section dimensions, hole positions and thickness are exactly to the manufacturer's stated values.

Even small deviations to these values may lead to significant variations in performance from that used in design. It is imperative that this be resolved immediately and prior to installation.

Purlins and Girts supplied by Stramit will be made from high tensile galvanised steel.

Final inspection of the installed purlin, girt and bridging system should check for correct bolting of laps and that bridging is correctly in place. If practical, a check of bolt tightness is highly desirable, both on the purlins and on bolted bridging connections.

Walking

Stramit® Purlins, Girts and Bridging are not designed for walking on and will be flexible and twist until both bridging and roofing are fully fixed. Residual oil may be present on these components from manufacturing. The use of appropriate cradles or cherry pickers is recommended. As a minimum, follow these rules:

- Never walk on purlins without safety mesh in place.
- Always use a safety harness if walking on girts.
- Never walk or place body weight on to bridging.


Bridging

Stramit® Boltless Bridging can be installed either up or down the roof slope. However, as the starting and finishing components will be different, the direction of fixing must be established at the design/procurement phase.


For walls, where more than one row is to be installed, always complete the bridging for each girt before commencing on the next (i.e. Do not complete one row of bridging before starting the next).

Fixing Up the Slope

Fix Fascia Bridging

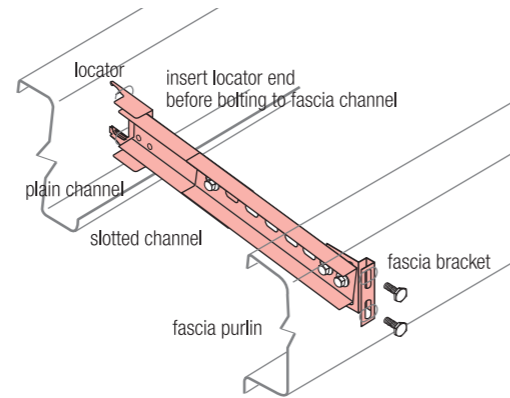


Insert Intermediate Bridging

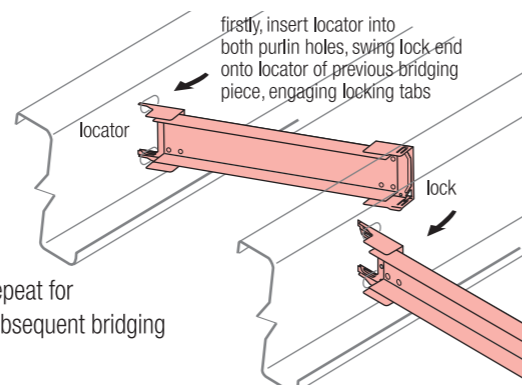


Repeat for subsequent bridging


Fix Ridge Bridging.

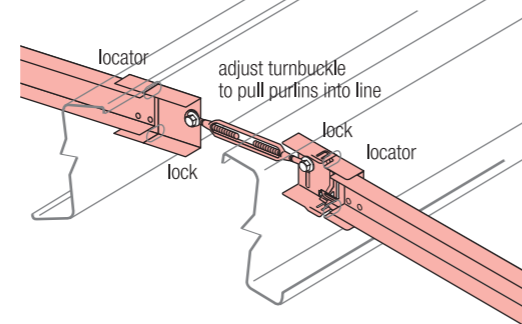

Adjust Fascia Bridging


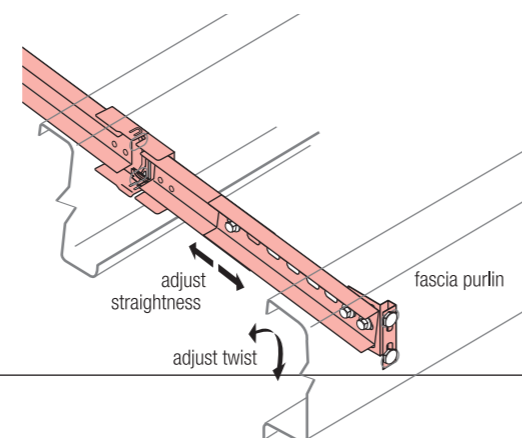


Typical Bridging Assembly Arrangement

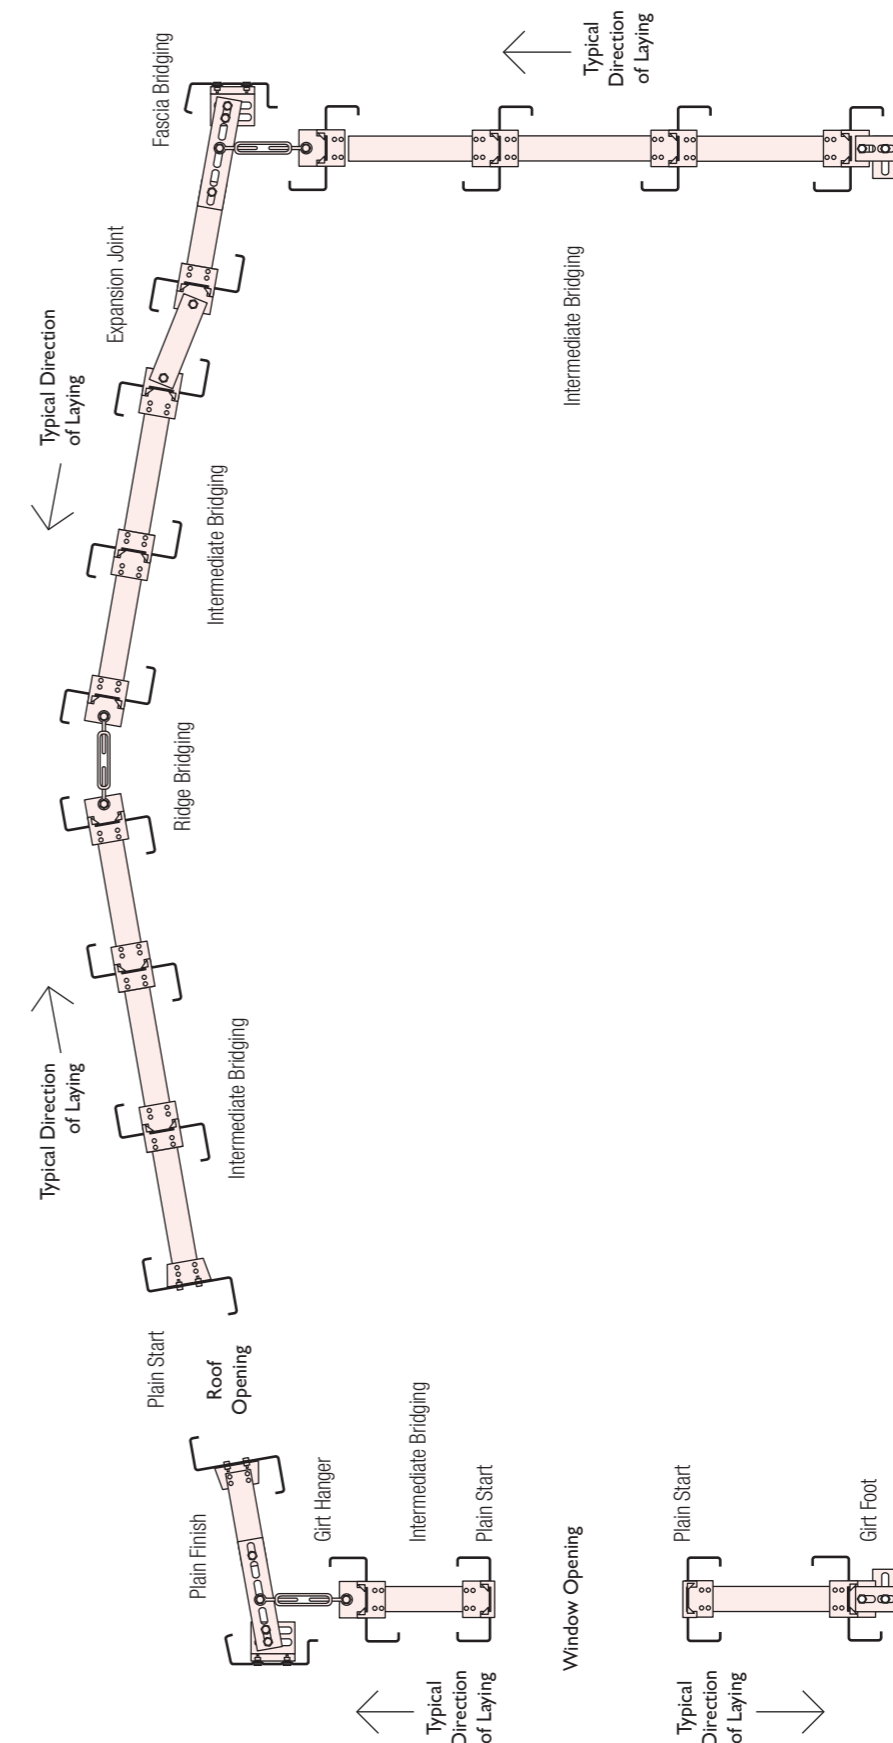

FRAMING SECTIONS


Product	Product Details	Code	Finish	BMT mm	Unit	
Stramit® Stud Sections	Standard Stud	SBS7510UTC	TC	1	per metre	
	Standard Stud	SBS7512UTC7400	TC (7.4m)	1.2	per length	
		SBS7512UTC	TC (CTL)	1.2	per metre	
	Nogging	SBN7212UTC74	TC (7.4m only)	1.2	per length	
	Plate	SBP7812UTC74	TC (7.4m only)	1.2	per length	
	STUD FRAMING					
	Cyclonic Stud	SBSC7516UTC	TC (CTL)	1.6	per metre	
	Jumbo Stud	SBSJ14012ZA	ZA	1.2	per metre	
		SBSC7516UTC7400	TC (7.4m)	1.6	per length	
	CRIMPING					
	Crimped One End	SBS7512C1ETC	TC	1.2	per metre	
	Crimped Both End	SBS7512C2ETC	TC	1.2	per metre	



* U = UNPUNCHED
P = PUNCHED

Note:
Minimum length 4 metre
Maximum length 14 metres
Longer lengths by negotiation


Stramit® Top Hat



64mm Top Hat	TH6475ZA	0.75	per metre
64mm Top Hat	TH64100ZA	1.0	per metre
*96mm Top Hat	TH9675ZA	0.75	per metre
*96mm Top Hat	TH96100ZA	1.0	per metre
*96mm Top Hat	TH96120ZA	1.2	per metre
*120mm Top Hat	TH12070ZA	0.70	per metre
*120mm Top Hat	TH12090ZA	0.90	per metre
64mm Top Hat	TH6475ZA6100	6.1 m	0.75 each
64mm Top Hat	TH64100ZA6100	6.1 m	1.00 each
120mm Top Hat	TH12090ZA6100	6.1 m	0.90 each

* Available ex East (allow minimum 10 working days)

Stramit® Battens



Roof Batten 50mm	RB50TC61	6.1 m	0.80 each
Ceiling Batten 25mm	CBTC61	6.1 m	0.42 each
Tile Batten 40mm	RB40TC6100	6.1 m	0.55 each
Roof Batten (Cyclonic) 40mm	RBC40TC7500	7.5 m	0.75 each

FRAMING SECTIONS • ACCESSORIES

Product	Product Details	Code	Finish	m/Tonne	BMT mm	Unit
Stramit® Valley Boards		VB120ZA	ZA		1.20	lin metre
Stramit® Valley Ends	LH	VBELZA	Washcoat only		0.60	each
	RH	VBERZA	Washcoat only		0.60	each
Stramit® Eaves Angles	40 x 25mm	AF402580ZA	ZA only		0.80	lin metre
	32 x 32mm	AF3280ZA	ZA only		0.80	lin metre
Fasteners	10 x 16mm Hex Head SDS	S1016HT4				per 1000

NOTE: Minimum Fastener Order in increments of 1000.


FLOORING COMPONENTS • ACCESSORIES

Designed to meet the needs of domestic and light commercial construction, **Stramit**® Floor Sections offer an economical, easy to use solution to floor framing and construction.

With a wide range of section sizes offering freedom in design of floor joists, bearers, pier sizes and location, the **Stramit**® Floor Sections adapt to a variety of house designs and conditions.

These new section shapes also offer up to 30% more load capacity or 9% greater spanning performance than conventional C-sections.

The in-plane system saves building height or headroom and reduces brick or cladding costs.

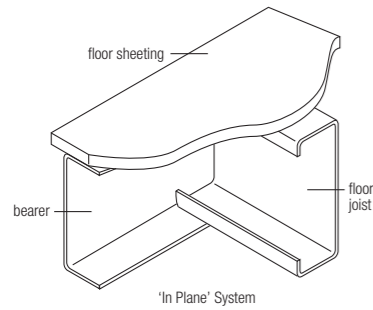

- High tensile steel – for high strength and low weight
- Z350 Galvanised coating – to give long term protection to the steel base. Z350 coating exceeds requirements of the Building Code of Australia for most building areas
- Deeper sections – 235mm and 283mm joists allow for over 100mm pipe penetrations and standard toilet bends under floor
- 235mm joist – matches 3 courses of bricks
- Full range of sections – for economic design
- Designed to resist bounce – uses the latest technology to prevent low frequency vibration in the floor structure
- A complete system – with joists, bearers, brackets and accessories

Product	Product Details	Code	BMT mm	Unit
Flooring Components				
Stramit® Floor Joists 		J18212	1.2	per metre
		J18215	1.5	per metre
		J18219	1.9	per metre
		J18224	2.4	per metre
		J23515	1.5	per metre
		J23519	1.9	per metre
		J23524	2.4	per metre
		J28319	1.9	per metre
		J28324	2.4	per metre
Stramit® Floor Bearers 		B18219	1.9	per metre
		B18224	2.4	per metre
		B23519	1.9	per metre
		B23524	2.4	per metre
		B28319	1.9	per metre
		B28324	2.4	per metre
				MAXIMUM LENGTHS APPLY

NOTE: 283 Joists & Bearers delivery 7-10 days.

Accessories	Product Details	Code	Unit
	Flooring Cleat	FCB2	each
	Web Bracket (suits 182)	FCB3A	each
	Web Bracket (suits 235/283)	FCB3B	each

Fasteners	10 x 16mm	Hex Head SDS	S1016HT4	per 1000
	14 x 22mm	Hex Head SDS	S1422HT	per 500

Note: Minimum Fastener Order in increments of 1000.

FASCIA • ACCESSORIES

Product	Product Details	Code	Finish	Unit
Stramit Strongline® Fascia 		FBWAZA	0.53mm TCT	ZA per metre
		FBWAX---		COL per metre
		FBWAU---		Ultra per metre
		FBWAT---		Matt per metre
		FBWAZM8---		Magnaflow per metre

Note:
Minimum length 1 metre
Maximum length 8 metres

General Accessories






	Splice Plates	FBWASPZA	ZA	each
	Barge Corners LH	FBWABCLZA	ZA	each
		FBWABCLX---	COL	each
		FBWABCLU---	Ultra	each
		FBWABCLT---	Matt	each
	Barge Corners RH	FBWABCRZA	ZA	each
		FBWABCRX---	COL	each
		FBWABCRU---	Ultra	each
		FBWABCRT---	Matt	each
	Corners 90° External	FBWAECZA	ZA	each
		FBWAECX---	COL	each
		FBWAECU---	Ultra	each
		FBWAECT---	Matt	each
	Corners 135° External	FBWAEC135ZA	ZA	each
		FBWAEC135X---	COL	each
		FBWAEC135T---	Matt	each
	Corners 90° Internal	FBWAICZA	ZA	each
		FBWAICX---	COL	each
		FBWAICU---	Ultra	each
		FBWAICT---	Matt	each
	Corners 135° Internal	FBWAIC135ZA	ZA	each
		FBWAIC135X---	COL	each
		FBWAIC135T---	Matt	each
	Stramit® End Fix Clip	FBWAEFCGA	GA	each
	Rafter Brackets	FBWARBZA	ZA	each

COLORBOND® STEEL - CARE • MAINTENANCE

Hints and tips to achieve maximum life from your COLORBOND® steel product.


- COLORBOND® steel used in areas not washed by rainfall should be cleaned down at regular intervals.
- Brick cleaning acid must not be allowed to contact steel fascia, gutter or roofing.
- Never immerse COLORBOND® steel in sand, soil or concrete.
- Do not use “touch-up” paint systems on COLORBOND® steel.
- Avoid metal debris from cutting and/or drilling.
- Keep material dry when in bundles prior to installation.
- Contact with dissimilar metals and run-off from dissimilar metals such as Copper, lead, etc must be avoided.
- Roofing and guttering need to be free draining and free from the accumulation of dirt or leaves.

GUTTERS






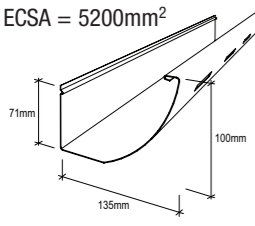

Product Gutters	Product Details	Code	Finish	Unit	
Stramit® Easiline Commercial ECSA = 8000mm ² 	Cut to length	ECRPZA ECRPX---	ZA COL	per metre per metre	
	Stock length	ECRPZA70	ZA	each	
	Stop Ends LH	ECRPSELZA ECRPSELX---	ZA COL	each each	
	Stop Ends RH	ECRPSERZA ECRPSERX---	ZA COL	each each	
	All standard colours available - 6 day lead time.				
Stramit® Easiline Patio ECSA = 6800mm ² 	Cut to length	EPGUZA EPGUX---	ZA COL	per metre per metre	
	Corners (Internal)	EPGUICZA EPGUICX---	ZA COL	each each	
	Corners (External)	EPGUECZA EPGUECX---	ZA COL	each each	
	Stop Ends	ELGUSEZA ELGUSEX---	ZA COL	each each	
	All standard colours available.				
Stramit® Easiline Domestic ECSA = 6800mm ² 	Cut to length	EDGUZA EDGUX---	ZA COL	per metre per metre	
	Corners (Internal)	EDGUICZA EDGUICX---	ZA COL	each each	
	Corners (External)	EDGUECZA EDGUECX---	ZA COL	each each	
	Stop Ends	ELGUSEZA ELGUSEX---	ZA COL	each each	
	All standard colours available.				
Stramit Strongline® ECSA = 6000mm ² 	Cut to length	SLGPZA SLGPX---	ZA COL	per metre per metre	
	Slotted	SLGSZA SLGSX---	ZA COL	per metre per metre	
	Corners (Internal)	SLGUICZA SLGUICX---	ZA COL	each each	
	Corners (External)	SLGUECZA SLGUECX---	ZA COL	each each	
	Stop Ends LH	SLGUSELZA SLGUSELX---	ZA COL	each each	
	Stop Ends RH	SLGUSERZA SLGUSERX---	ZA COL	each each	
	All standard colours available.				
	Stramit Trad-Line™ ECSA = 5200mm ² 	Cut to length	TLGPZA TLGPX--- TLGPT---	ZA COL Matt	per metre per metre per metre
		Slotted	TLGPZM8--- TLGSZA TLGSX--- TLGST---	Magnaflow ZA COL Matt	per metre per metre per metre per metre
Corners (Internal)		TLGSZM8--- TLGUICZA TLGUICX---	Magnaflow ZA COL	per metre each each	
Corners (External)		TLGUICT--- TLGUECZA TLGUECX---	Matt ZA COL	each each each	
Stop Ends LH		TLGUECT--- TLGUSELZA TLGUSELX--- TLGUSELT---	Matt ZA COL Matt	each each each each	
Stop Ends RH		TLGUSELM8--- TLGUSERZA TLGUSERX--- TLGUSERT--- TLGUSERZM8---	Magnaflow ZA COL Matt Magnaflow	each each each each each	
Cut to length		TLGPI--- TLGSU---	Ultra Ultra	per metre per metre	
Slotted		TLGPI--- TLGSU---	Ultra Ultra	per metre per metre	
Corners (Internal)		TLGUICU---	Ultra	each	
Corners (External)		TLGUECU---	Ultra	each	
Stop Ends LH		TLGUSELU---	Ultra	each	
Stop Ends RH		TLGUSERU---	Ultra	each	
All standard colours available.					

Note:
Minimum length 1 metre
Maximum length 8 metres




GUTTERS

Product Gutters	Product Details	Code	Finish	Unit	
Stramit® Quarter Round ECSA = 5200mm ² 	Cut to length	QRG55ZA	ZA	per metre	
		QRG55X---	COL	per metre	
		QRG55U---	Ultra	per metre	
	Stop Ends LH	QRGSELZA	ZA	each	
		QRGSELX---	COL	each	
		QRGSELU---	Ultra	each	
	Stop Ends RH	QRGSERZA	ZA	each	
		QRGSERX---	COL	each	
		QRGSERU---	Ultra	each	
	Note: Minimum length 1 metre Maximum length 8 metres All standard colours available.				

GUTTER ACCESSORIES

Product Gutter Accessories	Product Details	Code	Finish	Unit
Accessories	General Purpose Brackets Suit Easiline Commercial Gutter 	GCECGPBGA	GA	per 100
	T Pattern internal Suit Stramit Strongline® & Stramit Trad-Line™ gutters Timber Fix 	GCDTZA	ZA	per 100
	M Pattern internal Suit Stramit Strongline® & Stramit Trad-Line™ gutters Metal Fix 	GCDMZA	ZA	per 100
	Universal Gutter Clips For Easiline Gutters 	GCSGA	GA	per 100
	Clip C suit Easiline Patio & Easiline Domestic Gutters 	ESSBZA	ZA	per 100
	Quarter Round Concealed Bracket Timber Fix 	QRGCBTZA	ZA	per 100
	Quarter Round Concealed Bracket Metal Fix 	QRGCBMZA	ZA	per 100

DOWNPIPE • ACCESSORIES

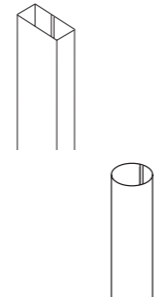Product Downpipe/Accessories	Product Details	Code	Finish	unit
Stramit® Downpipe 	95 x 45 x 1800mm	DP9545ZA18	ZA	each
	95 x 45 x 1800mm	DP9545X---18	COL	each
		DP9545T---18	Matt	
	95 x 45 x 2400mm	DP9545ZA24	ZA	each
	95 x 45 x 2400mm	DP9545X---24	COL	each
		DP9545T---24	Matt	
	100 x 50 x 1800mm	DP10050ZA18	ZA	each
	100 x 50 x 1800mm	DP10050X---18	COL	each
	100 x 50 x 2400mm	DP10050ZA24	ZA	each
	100 x 50 x 2400mm	DP10050X---24	COL	each
	100 x 75 x 1800mm	DP10075ZA18	ZA	each
	100 x 75 x 1800mm	DP10075X---18	COL	each
	100 x 75 x 2400mm	DP10075ZA24	ZA	each
	100 x 75 x 2400mm	DP10075X---24	COL	each
	100 x 100 x 1800mm	DP100100ZA18	ZA	each
	100 x 100 x 1800mm	DP100100X---18	COL	each
	100 x 100 x 2400mm	DP100100ZA24	ZA	each
	100 x 100 x 2400mm	DP100100X---24	COL	each
	75 x 50 x 1800mm	DP7550ZA18	ZA	each
	75 x 50 x 1800mm	DP7550X---18	COL	each
75 x 50 x 2400mm	DP7550ZA24	ZA	each	
75 x 50 x 2400mm	DP7550X---24	COL	each	
75 Round x 1800mm	DP75ZA18	ZA	each	
75 Round x 1800mm	DP75X---18	COL	each	
75 Round x 1800mm	DP75T---18	Matt	each	
75 Round x 2400mm	DP75ZA24	ZA	each	
100 Round x 1800mm	DP100ZA18	ZA	each	
	DP100X---18	COL	each	
Ultra Finish	95 x 45 x 1800mm	DP9545U---18	Ultra	each
	95 x 45 x 2400mm	DP9545U---24	Ultra	each
Accessories	Downpipe Pops 75 x 50 95 x 45 100 x 50 100 x 75 100 x 100 75 Round 50 Round 90 Round 100 Round 	NOZ7550ZA NOZ9545ZA NOZ10050ZA NOZ10075ZA NOZ100100ZA NOZ75ZA NOZ50ZA NOZ90ZA NOZ100ZA	ZA ZA ZA ZA ZA ZA ZA ZA ZA	each each each each each each each each each
	Downpipe Strap 	DPCLIPZA24 DPCLIPX---24	ZA COL	2400mm 2400mm
	Downpipe Stand Off Bracket 75	DPSB75ZA DPSB75X---	ZA COL	each each
	Downpipe Shoe 75 x 50	SHOE7550ZA SHOE7550X---	ZA COL	each each
	Clip 95 x 45	AST9545ZA AST9545X--- AST9545U--- AST9545T---	ZA COL Ultra Matt	each each each each
	Clip 75 x 50	AST7550ZA AST7550X---	ZA COL	each each
	Clip 75 Round	AST75ZA AST75X--- AST75T	ZA COL Matt	each each each
	Clip 100 x 50	AST10050ZA AST10050X---	ZA COL	each each
	Clip 100 Round	AST100ZA AST100X---	ZA COL	each each
	Clip 100 x 75	AST10075ZA AST10075X---	ZA COL	each each
	Clip 100 x 100	AST100100ZA AST100100X---	ZA COL	each each
	Downpipe Shoe 75x50	SHOE7550ZA SHOE7550X---	ZA COL	each each

STANDARD FLASHINGS

Product	Product Details	Code	Finish	TCT mm
Stramit® Roll Top Ridge Cap	Custom Made	RTR40ZA RTR40X--- RTR40T--- RTR40RRX--- RTR55ZA RTR55RRX--- RTR55U--- RTR55T---	ZA COL Matt COL ZA COL Ultra Matt	0.40mm 0.40mm 0.40mm 0.40mm 0.55mm 0.55mm 0.55mm 0.55mm
	Reverse Roll with 10mm, 30mm, breaks Reverse Roll Custom Made			
Stramit® Stepped Roll Top Ridge Cap	Custom Made	RTRRIB40ZA RTRRIB40X--- RTRRIB55ZA RTRRIB55X--- RTRRIB40RRX--- RTRRIB55U--- RTRRIB55T---	ZA COL ZA COL COL Ultra Ultra	0.40mm 0.40mm 0.55mm 0.55mm 0.40mm 0.55mm 0.55mm
	Reverse Roll Custom Made			
Stramit® Flat Top Ridge Cap	Custom Made	RFC40ZA RFC40X--- RFC40RRX--- RFC55ZA RFC55X--- RFMC40ZA RFMC40X--- RFMC55ZA RFMC55X--- RFC55U--- RFMC55U---	ZA COL COL ZA COL ZA COL Ultra Ultra	0.40mm 0.40mm 0.40mm 0.55mm 0.55mm 0.40mm 0.55mm 0.55mm 0.55mm 0.55mm
	Reverse Roll with 10mm, 30mm, breaks Custom Made			
Stramit® Valley Gutter	Custom Made	VRIBWA40ZA VRIBWA40X--- VRIBWA40T--- VPF55ZA VPF55X--- VPF55T--- VPF55U---	ZA COL Matt ZA COL Matt Ultra	0.40mm 0.40mm 0.40mm 0.55mm 0.55mm 0.55mm 0.55mm
	Custom Made			
Stramit® Barge Capping	Custom Made	BFC24040ZA BFC24040X--- BFC24055ZA BFC24055X--- BFMC40ZA BFMC40X---	ZA COL ZA COL ZA COL	0.40mm 0.40mm 0.55mm 0.55mm 0.40mm 0.40mm
	Custom Made Stramit® Corrugated sheeting with 10mm, 30mm, breaks Custom Made Stramit® Mono clad sheeting			
Stramit® 'E' Type Barge Capping	Custom Made	BFCE40ZA BFCE40X--- BFMCE40ZA BFMCE40X---	ZA COL ZA COL	0.40mm 0.40mm 0.40mm 0.40mm
	Custom Made Stramit® Corrugated sheeting with 10mm, 30mm, breaks Custom Made Stramit® Mono clad sheeting			
Stramit® Under Flashings	Custom Made	UFC40ZA UFC40X--- UFMC30040ZA UFMC30040X--- UFC55ZA UFC55X--- UFC55U---	ZA COL ZA COL ZA COL Ultra	0.40mm 0.40mm 0.40mm 0.40mm 0.55mm 0.55mm 0.55mm
	Custom Made			
Stramit® Corner Mould	Custom Made	CMFC7540ZA CMFC7540X--- CMFC10040ZA CMFC10040X--- CMFC10055ZA CMFC10055X--- CMFC15040ZA CMFC15040X--- CMFC15055ZA CMFC15055X--- CMFMC15040ZA CMFMC15040X---	ZA COL ZA COL ZA COL ZA COL ZA COL ZA COL	0.40mm 0.40mm 0.40mm 0.40mm 0.55mm 0.55mm 0.40mm 0.40mm 0.55mm 0.55mm 0.40mm 0.40mm
	Custom Made			
Stramit® Hookover	Length 2.4m	PHO40ZA PHO40X--- PHO4024	ZA COL	0.40mm 0.40mm 0.40mm
Stramit® Secret Gutter	Length 2.4m	SG40ZA	ZA	0.40mm

CUSTOM FLASHINGS – ORDERING PROCEDURE

ORDERING PROCEDURE

1. Choose the appropriate profile type, material and finish
2. If Colour, nominate the side on which colour is required
3. N nominate the dimensions by the letters shown on diagrams
4. N nominate the angles on all bends
5. N nominate the quantity
6. N nominate length up to a maximum of 8 metres

EXAMPLE

1. Type 4, Surfmist®
2. Colour on side C
3. A – 15mm, B – 100mm, C – 150mm, D – 150mm
4. COL = 90°, AB = 90°, AD = 45°, EC = 45°
5. 1 off, 2.8m

GUTTERS

CAPPINGS

FLASHINGS

CUSTOM FLASHINGS

ZINCALUME® STEEL 0.40 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF040B00ZA	CF040B01ZA	CF040B02ZA	CF040B03ZA	CF040B04ZA
101-150 (C)	CF040C00ZA	CF040C01ZA	CF040C02ZA	CF040C03ZA	CF040C04ZA
151-200 (D)	CF040D00ZA	CF040D01ZA	CF040D02ZA	CF040D03ZA	CF040D04ZA
201-250 (E)	CF040E00ZA	CF040E01ZA	CF040E02ZA	CF040E03ZA	CF040E04ZA
251-300 (F)	CF040F00ZA	CF040F01ZA	CF040F02ZA	CF040F03ZA	CF040F04ZA
301-350 (G)	CF040G00ZA	CF040G01ZA	CF040G02ZA	CF040G03ZA	CF040G04ZA
351-400 (H)	CF040H00ZA	CF040H01ZA	CF040H02ZA	CF040H03ZA	CF040H04ZA
401-500 (J)	CF040J00ZA	CF040J01ZA	CF040J02ZA	CF040J03ZA	CF040J04ZA
501-600 (L)	CF040L00ZA	CF040L01ZA	CF040L02ZA	CF040L03ZA	CF040L04ZA
601-700 (N)	CF040N00ZA	CF040N01ZA	CF040N02ZA	CF040N03ZA	CF040N04ZA
701-800 (P)	CF040P00ZA	CF040P01ZA	CF040P02ZA	CF040P03ZA	CF040P04ZA
801-900 (R)	CF040R00ZA	CF040R01ZA	CF040R02ZA	CF040R03ZA	CF040R04ZA
901-1000 (T)	CF040T00ZA	CF040T01ZA	CF040T02ZA	CF040T03ZA	CF040T04ZA
1001-1100 (V)	CF040V00ZA	CF040V01ZA	CF040V02ZA	CF040V03ZA	CF040V04ZA
1101-1200 (X)	CF040X00ZA	CF040X01ZA	CF040X02ZA	CF040X03ZA	CF040X04ZA

ZINCALUME® STEEL 0.55 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF055B00ZA	CF055B01ZA	CF055B02ZA	CF055B03ZA	CF055B04ZA
101-150 (C)	CF055C00ZA	CF055C01ZA	CF055C02ZA	CF055C03ZA	CF055C04ZA
151-200 (D)	CF055D00ZA	CF055D01ZA	CF055D02ZA	CF055D03ZA	CF055D04ZA
201-250 (E)	CF055E00ZA	CF055E01ZA	CF055E02ZA	CF055E03ZA	CF055E04ZA
251-300 (F)	CF055F00ZA	CF055F01ZA	CF055F02ZA	CF055F03ZA	CF055F04ZA
301-350 (G)	CF055G00ZA	CF055G01ZA	CF055G02ZA	CF055G03ZA	CF055G04ZA
351-400 (H)	CF055H00ZA	CF055H01ZA	CF055H02ZA	CF055H03ZA	CF055H04ZA
401-500 (J)	CF055J00ZA	CF055J01ZA	CF055J02ZA	CF055J03ZA	CF055J04ZA
501-600 (L)	CF055L00ZA	CF055L01ZA	CF055L02ZA	CF055L03ZA	CF055L04ZA
601-700 (N)	CF055N00ZA	CF055N01ZA	CF055N02ZA	CF055N03ZA	CF055N04ZA
701-800 (P)	CF055P00ZA	CF055P01ZA	CF055P02ZA	CF055P03ZA	CF055P04ZA
801-900 (R)	CF055R00ZA	CF055R01ZA	CF055R02ZA	CF055R03ZA	CF055R04ZA
901-1000 (T)	CF055T00ZA	CF055T01ZA	CF055T02ZA	CF055T03ZA	CF055T04ZA
1001-1100 (V)	CF055V00ZA	CF055V01ZA	CF055V02ZA	CF055V03ZA	CF055V04ZA
1101-1200 (X)	CF055X00ZA	CF055X01ZA	CF055X02ZA	CF055X03ZA	CF055X04ZA

ZINCALUME® STEEL 0.75 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF075B00ZA	CF075B01ZA	CF075B02ZA	CF075B03ZA	CF075B04ZA
101-150 (C)	CF075C00ZA	CF075C01ZA	CF075C02ZA	CF075C03ZA	CF075C04ZA
151-200 (D)	CF075D00ZA	CF075D01ZA	CF075D02ZA	CF075D03ZA	CF075D04ZA
201-250 (E)	CF075E00ZA	CF075E01ZA	CF075E02ZA	CF075E03ZA	CF075E04ZA
251-300 (F)	CF075F00ZA	CF075F01ZA	CF075F02ZA	CF075F03ZA	CF075F04ZA
301-350 (G)	CF075G00ZA	CF075G01ZA	CF075G02ZA	CF075G03ZA	CF075G04ZA
351-400 (H)	CF075H00ZA	CF075H01ZA	CF075H02ZA	CF075H03ZA	CF075H04ZA
401-500 (J)	CF075J00ZA	CF075J01ZA	CF075J02ZA	CF075J03ZA	CF075J04ZA
501-600 (L)	CF075L00ZA	CF075L01ZA	CF075L02ZA	CF075L03ZA	CF075L04ZA
601-700 (N)	CF075N00ZA	CF075N01ZA	CF075N02ZA	CF075N03ZA	CF075N04ZA
701-800 (P)	CF075P00ZA	CF075P01ZA	CF075P02ZA	CF075P03ZA	CF075P04ZA
801-900 (R)	CF075R00ZA	CF075R01ZA	CF075R02ZA	CF075R03ZA	CF075R04ZA
901-1000 (T)	CF075T00ZA	CF075T01ZA	CF075T02ZA	CF075T03ZA	CF075T04ZA
1001-1100 (V)	CF075V00ZA	CF075V01ZA	CF075V02ZA	CF075V03ZA	CF075V04ZA
1101-1200 (X)	CF075X00ZA	CF075X01ZA	CF075X02ZA	CF075X03ZA	CF075X04ZA

CUSTOM FLASHINGS

ZINCALUME® STEEL 1.20 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF120B00ZA	CF120B01ZA	CF120B02ZA	CF120B03ZA	CF120B04ZA
101-150 (C)	CF120C00ZA	CF120C01ZA	CF120C02ZA	CF120C03ZA	CF120C04ZA
151-200 (D)	CF120D00ZA	CF120D01ZA	CF120D02ZA	CF120D03ZA	CF120D04ZA
201-250 (E)	CF120E00ZA	CF120E01ZA	CF120E02ZA	CF120E03ZA	CF120E04ZA
251-300 (F)	CF120F00ZA	CF120F01ZA	CF120F02ZA	CF120F03ZA	CF120F04ZA
301-350 (G)	CF120G00ZA	CF120G01ZA	CF120G02ZA	CF120G03ZA	CF120G04ZA
351-400 (H)	CF120H00ZA	CF120H01ZA	CF120H02ZA	CF120H03ZA	CF120H04ZA
401-500 (J)	CF120J00ZA	CF120J01ZA	CF120J02ZA	CF120J03ZA	CF120J04ZA
501-600 (L)	CF120L00ZA	CF120L01ZA	CF120L02ZA	CF120L03ZA	CF120L04ZA
601-700 (N)	CF120N00ZA	CF120N01ZA	CF120N02ZA	CF120N03ZA	CF120N04ZA
701-800 (P)	CF120P00ZA	CF120P01ZA	CF120P02ZA	CF120P03ZA	CF120P04ZA
801-900 (R)	CF120R00ZA	CF120R01ZA	CF120R02ZA	CF120R03ZA	CF120R04ZA
901-1000 (T)	CF120T00ZA	CF120T01ZA	CF120T02ZA	CF120T03ZA	CF120T04ZA
1001-1100 (V)	CF120V00ZA	CF120V01ZA	CF120V02ZA	CF120V03ZA	CF120V04ZA
1101-1200 (X)	CF120X00ZA	CF120X01ZA	CF120X02ZA	CF120X03ZA	CF120X04ZA

CUSTOM FLASHINGS

GALVANISED 0.40 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF040B00GA	CF040B01GA	CF040B02GA	CF040B03GA	CF040B04GA
101-150 (C)	CF040C00GA	CF040C01GA	CF040C02GA	CF040C03GA	CF040C04GA
151-200 (D)	CF040D00GA	CF040D01GA	CF040D02GA	CF040D03GA	CF040D04GA
201-250 (E)	CF040E00GA	CF040E01GA	CF040E02GA	CF040E03GA	CF040E04GA
251-300 (F)	CF040F00GA	CF040F01GA	CF040F02GA	CF040F03GA	CF040F04GA
301-350 (G)	CF040G00GA	CF040G01GA	CF040G02GA	CF040G03GA	CF040G04GA
351-400 (H)	CF040H00GA	CF040H01GA	CF040H02GA	CF040H03GA	CF040H04GA
401-500 (J)	CF040J00GA	CF040J01GA	CF040J02GA	CF040J03GA	CF040J04GA
501-600 (L)	CF040L00GA	CF040L01GA	CF040L02GA	CF040L03GA	CF040L04GA
601-700 (N)	CF040N00GA	CF040N01GA	CF040N02GA	CF040N03GA	CF040N04GA
701-800 (P)	CF040P00GA	CF040P01GA	CF040P02GA	CF040P03GA	CF040P04GA
801-900 (R)	CF040R00GA	CF040R01GA	CF040R02GA	CF040R03GA	CF040R04GA
901-1000 (T)	CF040T00GA	CF040T01GA	CF040T02GA	CF040T03GA	CF040T04GA
1001-1100 (V)	CF040V00GA	CF040V01GA	CF040V02GA	CF040V03GA	CF040V04GA
1101-1200 (X)	CF040X00GA	CF040X01GA	CF040X02GA	CF040X03GA	CF040X04GA

GALVANISED 0.55 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF055B00GA	CF055B01GA	CF055B02GA	CF055B03GA	CF055B04GA
101-150 (C)	CF055C00GA	CF055C01GA	CF055C02GA	CF055C03GA	CF055C04GA
151-200 (D)	CF055D00GA	CF055D01GA	CF055D02GA	CF055D03GA	CF055D04GA
201-250 (E)	CF055E00GA	CF055E01GA	CF055E02GA	CF055E03GA	CF055E04GA
251-300 (F)	CF055F00GA	CF055F01GA	CF055F02GA	CF055F03GA	CF055F04GA
301-350 (G)	CF055G00GA	CF055G01GA	CF055G02GA	CF055G03GA	CF055G04GA
351-400 (H)	CF055H00GA	CF055H01GA	CF055H02GA	CF055H03GA	CF055H04GA
401-500 (J)	CF055J00GA	CF055J01GA	CF055J02GA	CF055J03GA	CF055J04GA
501-600 (L)	CF055L00GA	CF055L01GA	CF055L02GA	CF055L03GA	CF055L04GA
601-700 (N)	CF055N00GA	CF055N01GA	CF055N02GA	CF055N03GA	CF055N04GA
701-800 (P)	CF055P00GA	CF055P01GA	CF055P02GA	CF055P03GA	CF055P04GA
801-900 (R)	CF055R00GA	CF055R01GA	CF055R02GA	CF055R03GA	CF055R04GA
901-1000 (T)	CF055T00GA	CF055T01GA	CF055T02GA	CF055T03GA	CF055T04GA
1001-1100 (V)	CF055V00GA	CF055V01GA	CF055V02GA	CF055V03GA	CF055V04GA
1101-1200 (X)	CF055X00GA	CF055X01GA	CF055X02GA	CF055X03GA	CF055X04GA

GALVANISED 0.95 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF095B00GA	CF095B01GA	CF095B02GA	CF095B03GA	CF095B04GA
101-150 (C)	CF095C00GA	CF095C01GA	CF095C02GA	CF095C03GA	CF095C04GA
151-200 (D)	CF095D00GA	CF095D01GA	CF095D02GA	CF095D03GA	CF095D04GA
201-250 (E)	CF095E00GA	CF095E01GA	CF095E02GA	CF095E03GA	CF095E04GA
251-300 (F)	CF095F00GA	CF095F01GA	CF095F02GA	CF095F03GA	CF095F04GA
301-350 (G)	CF095G00GA	CF095G01GA	CF095G02GA	CF095G03GA	CF095G04GA
351-400 (H)	CF095H00GA	CF095H01GA	CF095H02GA	CF095H03GA	CF095H04GA
401-500 (J)	CF095J00GA	CF095J01GA	CF095J02GA	CF095J03GA	CF095J04GA
501-600 (L)	CF095L00GA	CF095L01GA	CF095L02GA	CF095L03GA	CF095L04GA
601-700 (N)	CF095N00GA	CF095N01GA	CF095N02GA	CF095N03GA	CF095N04GA
701-800 (P)	CF095P00GA	CF095P01GA	CF095P02GA	CF095P03GA	CF095P04GA
801-900 (R)	CF095R00GA	CF095R01GA	CF095R02GA	CF095R03GA	CF095R04GA
901-1000 (T)	CF095T00GA	CF095T01GA	CF095T02GA	CF095T03GA	CF095T04GA
1001-1100 (V)	CF095V00GA	CF095V01GA	CF095V02GA	CF095V03GA	CF095V04GA
1101-1200 (X)	CF095X00GA	CF095X01GA	CF095X02GA	CF095X03GA	CF095X04GA

CUSTOM FLASHINGS

GALVANISED 1.15 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF115B00GA	CF115B01GA	CF115B02GA	CF115B03GA	CF115B04GA
101-150 (C)	CF115C00GA	CF115C01GA	CF115C02GA	CF115C03GA	CF115C04GA
151-200 (D)	CF115D00GA	CF115D01GA	CF115D02GA	CF115D03GA	CF115D04GA
201-250 (E)	CF115E00GA	CF115E01GA	CF115E02GA	CF115E03GA	CF115E04GA
251-300 (F)	CF115F00GA	CF115F01GA	CF115F02GA	CF115F03GA	CF115F04GA
301-350 (G)	CF115G00GA	CF115G01GA	CF115G02GA	CF115G03GA	CF115G04GA
351-400 (H)	CF115H00GA	CF115H01GA	CF115H02GA	CF115H03GA	CF115H04GA
401-500 (J)	CF115J00GA	CF115J01GA	CF115J02GA	CF115J03GA	CF115J04GA
501-600 (L)	CF115L00GA	CF115L01GA	CF115L02GA	CF115L03GA	CF115L04GA
601-700 (N)	CF115N00GA	CF115N01GA	CF115N02GA	CF115N03GA	CF115N04GA
701-800 (P)	CF115P00GA	CF115P01GA	CF115P02GA	CF115P03GA	CF115P04GA
801-900 (R)	CF115R00GA	CF115R01GA	CF115R02GA	CF115R03GA	CF115R04GA
901-1000 (T)	CF115T00GA	CF115T01GA	CF115T02GA	CF115T03GA	CF115T04GA
1001-1100 (V)	CF115V00GA	CF115V01GA	CF115V02GA	CF115V03GA	CF115V04GA
1101-1200 (X)	CF115X00GA	CF115X01GA	CF115X02GA	CF115X03GA	CF115X04GA

GALVANISED 1.55 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF155B00GA	CF155B01GA	CF155B02GA	CF155B03GA	CF155B04GA
101-150 (C)	CF155C00GA	CF155C01GA	CF155C02GA	CF155C03GA	CF155C04GA
151-200 (D)	CF155D00GA	CF155D01GA	CF155D02GA	CF155D03GA	CF155D04GA
201-250 (E)	CF155E00GA	CF155E01GA	CF155E02GA	CF155E03GA	CF155E04GA
251-300 (F)	CF155F00GA	CF155F01GA	CF155F02GA	CF155F03GA	CF155F04GA
301-350 (G)	CF155G00GA	CF155G01GA	CF155G02GA	CF155G03GA	CF155G04GA
351-400 (H)	CF155H00GA	CF155H01GA	CF155H02GA	CF155H03GA	CF155H04GA
401-500 (J)	CF155J00GA	CF155J01GA	CF155J02GA	CF155J03GA	CF155J04GA
501-600 (L)	CF155L00GA	CF155L01GA	CF155L02GA	CF155L03GA	CF155L04GA
601-700 (N)	CF155N00GA	CF155N01GA	CF155N02GA	CF155N03GA	CF155N04GA
701-800 (P)	CF155P00GA	CF155P01GA	CF155P02GA	CF155P03GA	CF155P04GA
801-900 (R)	CF155R00GA	CF155R01GA	CF155R02GA	CF155R03GA	CF155R04GA
901-1000 (T)	CF155T00GA	CF155T01GA	CF155T02GA	CF155T03GA	CF155T04GA
1001-1100 (V)	CF155V00GA	CF155V01GA	CF155V02GA	CF155V03GA	CF155V04GA
1101-1200 (X)	CF155X00GA	CF155X01GA	CF155X02GA	CF155X03GA	CF155X04GA

GALVANISED 1.95 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF195B00GA	CF195B01GA	CF195B02GA	CF195B03GA	CF195B04GA
101-150 (C)	CF195C00GA	CF195C01GA	CF195C02GA	CF195C03GA	CF195C04GA
151-200 (D)	CF195D00GA	CF195D01GA	CF195D02GA	CF195D03GA	CF195D04GA
201-250 (E)	CF195E00GA	CF195E01GA	CF195E02GA	CF195E03GA	CF195E04GA
251-300 (F)	CF195F00GA	CF195F01GA	CF195F02GA	CF195F03GA	CF195F04GA
301-350 (G)	CF195G00GA	CF195G01GA	CF195G02GA	CF195G03GA	CF195G04GA
351-400 (H)	CF195H00GA	CF195H01GA	CF195H02GA	CF195H03GA	CF195H04GA
401-500 (J)	CF195J00GA	CF195J01GA	CF195J02GA	CF195J03GA	CF195J04GA
501-600 (L)	CF195L00GA	CF195L01GA	CF195L02GA	CF195L03GA	CF195L04GA
601-700 (N)	CF195N00GA	CF195N01GA	CF195N02GA	CF195N03GA	CF195N04GA
701-800 (P)	CF195P00GA	CF195P01GA	CF195P02GA	CF195P03GA	CF195P04GA
801-900 (R)	CF195R00GA	CF195R01GA	CF195R02GA	CF195R03GA	CF195R04GA
901-1000 (T)	CF195T00GA	CF195T01GA	CF195T02GA	CF195T03GA	CF195T04GA
1001-1100 (V)	CF195V00GA	CF195V01GA	CF195V02GA	CF195V03GA	CF195V04GA
1101-1200 (X)	CF195X00GA	CF195X01GA	CF195X02GA	CF195X03GA	CF195X04GA

CUSTOM FLASHINGS

COLORBOND® STEEL 0.40 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF040B00X---	CF040B01X---	CF040B02X---	CF040B03X---	CF040B04X---
101-150 (C)	CF040C00X---	CF040C01X---	CF040C02X---	CF040C03X---	CF040C04X---
151-200 (D)	CF040D00X---	CF040D01X---	CF040D02X---	CF040D03X---	CF040D04X---
201-250 (E)	CF040E00X---	CF040E01X---	CF040E02X---	CF040E03X---	CF040E04X---
251-300 (F)	CF040F00X---	CF040F01X---	CF040F02X---	CF040F03X---	CF040F04X---
301-350 (G)	CF040G00X---	CF040G01X---	CF040G02X---	CF040G03X---	CF040G04X---
351-400 (H)	CF040H00X---	CF040H01X---	CF040H02X---	CF040H03X---	CF040H04X---
401-500 (J)	CF040J00X---	CF040J01X---	CF040J02X---	CF040J03X---	CF040J04X---
501-600 (L)	CF040L00X---	CF040L01X---	CF040L02X---	CF040L03X---	CF040L04X---
601-700 (N)	CF040N00X---	CF040N01X---	CF040N02X---	CF040N03X---	CF040N04X---
701-800 (P)	CF040P00X---	CF040P01X---	CF040P02X---	CF040P03X---	CF040P04X---
801-900 (R)	CF040R00X---	CF040R01X---	CF040R02X---	CF040R03X---	CF040R04X---
901-1000 (T)	CF040T00X---	CF040T01X---	CF040T02X---	CF040T03X---	CF040T04X---
1001-1100 (V)	CF040V00X---	CF040V01X---	CF040V02X---	CF040V03X---	CF040V04X---
1101-1200 (X)	CF040X00X---	CF040X01X---	CF040X02X---	CF040X03X---	CF040X04X---

COLORBOND® STEEL 0.55 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF055B00X---	CF055B01X---	CF055B02X---	CF055B03X---	CF055B04X---
101-150 (C)	CF055C00X---	CF055C01X---	CF055C02X---	CF055C03X---	CF055C04X---
151-200 (D)	CF055D00X---	CF055D01X---	CF055D02X---	CF055D03X---	CF055D04X---
201-250 (E)	CF055E00X---	CF055E01X---	CF055E02X---	CF055E03X---	CF055E04X---
251-300 (F)	CF055F00X---	CF055F01X---	CF055F02X---	CF055F03X---	CF055F04X---
301-350 (G)	CF055G00X---	CF055G01X---	CF055G02X---	CF055G03X---	CF055G04X---
351-400 (H)	CF055H00X---	CF055H01X---	CF055H02X---	CF055H03X---	CF055H04X---
401-500 (J)	CF055J00X---	CF055J01X---	CF055J02X---	CF055J03X---	CF055J04X---
501-600 (L)	CF055L00X---	CF055L01X---	CF055L02X---	CF055L03X---	CF055L04X---
601-700 (N)	CF055N00X---	CF055N01X---	CF055N02X---	CF055N03X---	CF055N04X---
701-800 (P)	CF055P00X---	CF055P01X---	CF055P02X---	CF055P03X---	CF055P04X---
801-900 (R)	CF055R00X---	CF055R01X---	CF055R02X---	CF055R03X---	CF055R04X---
901-1000 (T)	CF055T00X---	CF055T01X---	CF055T02X---	CF055T03X---	CF055T04X---
1001-1100 (V)	CF055V00X---	CF055V01X---	CF055V02X---	CF055V03X---	CF055V04X---
1101-1200 (X)	CF055X00X---	CF055X01X---	CF055X02X---	CF055X03X---	CF055X04X---

COLORBOND® STEEL MATT 0.55 BMT

Girth Width (mm)	No of Bends				
	0	1	2	3	4
001-100 (B)	CF055B00T---	CF055B01T---	CF055B02T---	CF055B03T---	CF055B04T---
101-150 (C)	CF055C00T---	CF055C01T---	CF055C02T---	CF055C03T---	CF055C04T---
151-200 (D)	CF055D00T---	CF055D01T---	CF055D02T---	CF055D03T---	CF055D04T---
201-250 (E)	CF055E00T---	CF055E01T---	CF055E02T---	CF055E03T---	CF055E04T---
251-300 (F)	CF055F00T---	CF055F01T---	CF055F02T---	CF055F03T---	CF055F04T---
301-350 (G)	CF055G00T---	CF055G01T---	CF055G02T---	CF055G03T---	CF055G04T---
351-400 (H)	CF055H00T---	CF055H01T---	CF055H02T---	CF055H03T---	CF055H04T---
401-500 (J)	CF055J00T---	CF055J01T---	CF055J02T---	CF055J03T---	CF055J04T---
501-600 (L)	CF055L00T---	CF055L01T---	CF055L02T---	CF055L03T---	CF055L04T---
601-700 (N)	CF055N00T---	CF055N01T---	CF055N02T---	CF055N03T---	CF055N04T---
701-800 (P)	CF055P00T---	CF055P01T---	CF055P02T---	CF055P03T---	CF055P04T---
801-900 (R)	CF055R00T---	CF055R01T---	CF055R02T---	CF055R03T---	CF055R04T---
901-1000 (T)	CF055T00T---	CF055T01T---	CF055T02T---	CF055T03T---	CF055T04T---
1001-1100 (V)	CF055V00T---	CF055V01T---	CF055V02T---	CF055V03T---	CF055V04T---
1101-1200 (X)	CF055X00T---	CF055X01T---	CF055X02T---	CF055X03T---	CF055X04T---

ACCOUNT NUMBER	ORDER NUMBER	SPA NUMBER	PROCESS NUMBER	DISC
<p>MAP REF _____</p> <p>CODE _____</p> <p>CF _____</p> <p>TAPER _____</p> <p>BENDS _____</p> <p>COATING _____</p> <p>GIRTH _____</p> <p>DATE ORDERED _____</p>				
<p>QTY _____</p> <p>LENGTH _____</p> <p>MK _____</p>				

FLASHING ORDER

FOIL • BLANKET • WIRE

Product Foil/Blanket/Wire	Product Details	Code	Cover	Unit
 Aluminium Foil 1.35m x 60m Rolls	Lightweight Anti-glare	FLLWAG600	81m ²	per roll
	Medium Anti-glare	FLMWAG600	81m ²	per roll
	Heavy Anti-glare	FLHWAG600	81m ²	per roll
 Fibreglass Building Blanket Plain	R1.20 x 30m (55mm thick)	• BB55PLN300	36m ²	per roll
	R1.75 x 15m (75mm thick)	• BB75PLN150	18m ²	per roll
	R2.00 x 10m (100mm thick)	• BB100PLN100	12m ²	per roll
 Fibreglass Building Blanket Lightweight foil adhered	R1.30 x 15m (55mm thick)	• BB55LW150	18m ²	per roll
	R1.3 x 15m (50mm thick)	• BB55HW150	18m ²	per roll
	R1.30 x 20m (55mm thick)	• BB55LW200	24m ²	per roll
	R1.80 x 15m (75mm thick)	• BB75LW150	18m ²	per roll
	R2.50 x 10m (100mm thick)	• BB100LW100	12m ²	per roll
 Roofing Wire	1.8m x 50m Roof Safe Mesh 150 x 300 x 2.0mm	WMAUS500	90m ²	per roll
	1.8m x 50m Industrial Wire Netting 100 x 115 x 1.25m	WMCHICKEN500	90m ²	per roll
InsulBubble / Anti Glare Reflective Insulation	R0.11 x 22.25 (4.5mm thick)	FLIB100AG2225	30m ²	per roll
Tape	72mm x 50m	FLTAPE72500	50m	per roll

• Items not normally stocked – available to order.

TAUREAN® RESIDENTIAL AND COMMERCIAL ROLLER DOOR COLOURS

COLORBOND® STEEL COLOUR NAMES							
BAS	Basalt®	HED	Headland®	PPB	Paperbark®		
CLC	Classic Cream™	IST	Ironstone®	SHG	Shale Grey™		
CTG	Cottage Green®	JAS	Jasper®	SUR	Surfmist®		
COV	Cove®	MGV	Mangrove®	TRN	Terrain®		
DOC	Deep Ocean®	MNR	Manor Red®	WAL	Wallaby®		
DUN	Dune®	MON	Monument®	WDG	Woodland Grey®		
EVH	Evening Haze®	NTS	Night Sky®	WIL	Wilderness®		
GLY	Gully®	PEC	Pale Eucalypt®	WSP	Windspray®		
MATT	COLOURGRAIN			SELF-STORAGE / MINI WAREHOUSE			
BAS	Basalt® Matt	CAO	Caoba®	DVW	Dover White	MAN	Mandarin Orange
MON	Monument® Matt	CCE	Classic Cedar®	LAZ	Lazurite Blue	POP	Poppy Red
SUR	Surfmist® Matt						

TAUREAN RESIDENTIAL ROLLER DOORS

DOMESTIC PRIME SERIES 'A' AND 'AA', WINDLOCK AND WINDSTRONG

Product Details	Discount Group Code	Finish	Code	Unit
Series A - Standard, WindLock or WindStrong options	7T	ZA	RDAZA	Ea
		COL	RDAhhCOLwww	Ea
Series AA - Standard, WindLock or WindStrong options	7V	ZA	RDAAZA	Ea
		COL	RDAAhCOLwww	Ea

Available in ZINCALUME® steel, COLORBOND® steel, COLORBOND® steel Matt and Colourgrain Domestic Roller Door										
Height (mm)	Series 'A' Doors (curtain width in mm)						Series 'AA' Doors (curtain width in mm)			
	Width									
	750 to 1550	1551 to 1850	1851 to 2550	2551 to 2800	2801 to 3100	3101 to 3430	3431 to 3750	3750 to 4350	4351 to 5100	5101 to 5400
1200										
2200										^
2500										^
2800										
3100										

^ Not available in WindLock

ORDERS TO BE PLACED AS DOOR SIZE (not opening width)

To calculate curtain width, add to opening width -

- 50mm for Series A
- 100mm for WindLock option
- 100mm for Series AA
- 110mm for WindStrong option

TAUREAN LIGHT INDUSTRIAL ROLLER DOORS

LIGHT INDUSTRIAL COMMANDO SERIES 'B', WINDLOCK AND WINDSTRONG

Product Details	Discount Group Code	Finish	Code	Unit
Series 'B' - Standard, WindLock or WindStrong options	7R	ZA	RDBZA	Ea
		COL	RDBCOL	Ea

Available in ZINCALUME® steel, COLORBOND® steel, COLORBOND® steel Matt and Colourgrain Domestic Roller Door										
Height (mm)	Series 'B' Doors (curtain width in mm)									
	Width									
	750 to 1550	1551 to 1850	1851 to 2550	2551 to 2800	2801 to 3100	3101 to 3430	3431 to 3750	3750 to 4350	4351 to 5100	5101 to 5400
2200										
2500										
2800										
3100										
3500										
3900										
4300										
4600										
5100										

ORDERS TO BE PLACED AS DOOR SIZE (not opening width)

To calculate curtain width, add to opening width -

- 50mm for Series A
- 100mm for WindLock option
- 100mm for Series AA
- 110mm for WindStrong option

Product Details	Code	Unit
Planetary Gear Chain System It is recommended that Planetary Gear Chain operating system be fitted to doors in shaded areas. Planetary Gear system MUST NOT be used when an electric operator is fitted.	RDPLANETGEAR	Ea

TAUREAN® RESIDENTIAL ROLLER DOORS - KEY POINTS

PR1ME SERIES ROLLER DOOR WINDLOCK CONFIGURATION				
Wind Classification (AS/NZS 4505-2012)		MAXIMUM DOOR WIDTH (mm)		
Classification	Ultimate Wind Pressure	0 - 3650	3651 - 5015	5016 - 5100
N1	< 4.0m: inwards 0.69kPa outwards -0.73kPa > 4.0m: inwards 0.69kPa outwards -0.63kPa	WindLock door 2.2 clips/m		
N2	< 4.0m: inwards 0.95kPa outwards -1.02kPa > 4.0m: inwards 0.95kPa outwards -0.87kPa			
N3	< 4.0m: inwards 1.49kPa outwards -1.59kPa > 4.0m: inwards 1.49kPa outwards -1.37kPa			
		3.9 clips/m	4.1 clips/m	

Wind Classification N3		MAXIMUM DOOR WIDTH (mm)		
ABUTMENT FORCES (kN/m)		0 - 3650	3651 - 5015	5016 - 5100
Fy INWARDS		5.5	6.2	8.2
Fx INWARDS		17.7	22.7	29.4
Fy OUTWARDS		9.5	9.5	11.2
Fx OUTWARDS		26.3	30.7	40.7

Taurean Doors Systems certify that this door meets the ultimate wind pressure ratings of Australian Standard AS/NZS 4505 and is fit for purpose in Regions A and B (non-cyclonic areas) of Australia when installed according to instructions. See taureands.com.au for details.

Tapers for Sloping Floors – Roller Doors



Taurean Pr1me Series Roller Doors are available with tapered curtains to suit floors with a slope across the door opening. Minimum and maximum taper sizes apply, please contact Taurean Customer Service on 1800 778 658 or via customerservice@taureands.com.au for further information.

WINDSTRONG™ Roller Door - Domestic and Medium General Purpose (20,000 cycles) AUSTRALIAN STANDARD 4505 COMPLIANT

Steel Guide Track	ULTIMATE CYCLONIC WIND PRESSURE								Aluminium Guide Track	ULTIMATE CYCLONIC WIND PRESSURE							
Door Width (mm)	2550	2800	3100	3430	3750	4350	5100	5400	Door Width (mm)	s 2550	2800	3100	3430	3750	4350	5100	5400
Inwards Ultimate Wind Pressure Rating (kPa)	6.27	5.76	5.20	4.64	4.17	3.46	2.89	2.76	Inwards Ultimate Wind Pressure Rating (kPa)	6.79	6.13	5.53	4.91	4.38	3.53	2.75	2.53
Outwards Ultimate Wind Pressure Rating (kPa)	7.24	6.91	6.50	6.02	5.54	4.59	3.31	2.77	Outwards Ultimate Wind Pressure Rating (kPa)	6.79	6.13	5.53	4.91	4.38	3.53	2.75	2.53
Domestic Cyclonic Region Ratings (door width mm)	C4 up to 2770	C3 up to 3660		C2 up to 5100		C2 up to 5400			Domestic Cyclonic Region Ratings (door width mm)	C3 up to 3430			C2 up to 4550		C1 up to 5400		

TAUREAN ROLLER DOOR INSTALLATION

For further information please refer to the Installation Guides at www.taureands.com.au or contact Customer Service 1800 778 658.

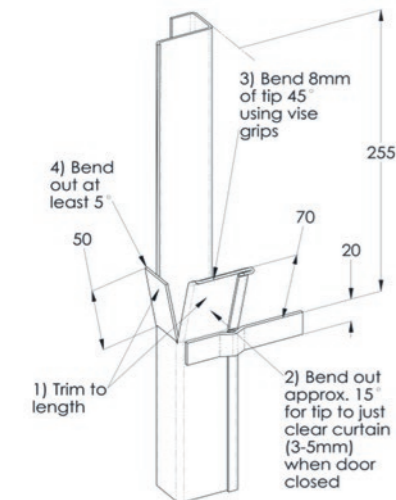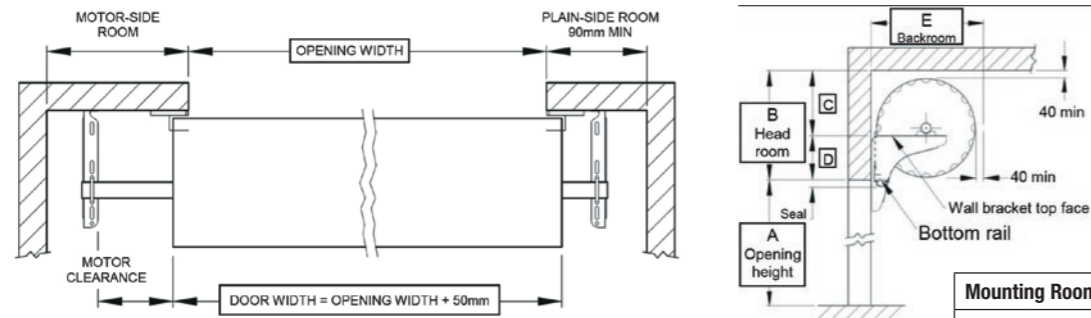

Mounting Room - Series A					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
1200	430	265	165	450	
2200	440	270	170	475	
2500	455	275	180	495	
2800	485	295	190	505	
3100	495	300	195	515	

Mounting Room - Series B					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
2200	440	270	170	485	
2500	455	275	180	505	
2800	485	295	190	515	
3100	495	300	195	525	
3900	515	310	205	545	
4600	550	325	225	575	
5100	560	330	230	585	

Mounting Room - Series AA					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
1200	430	265	165	460	
2200	440	270	170	485	
2500	455	275	180	505	
2800	485	295	190	515	
3100	495	300	195	525	

Mounting Room - NovaTaur Commercial					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
2500	485	290	195	500	
3100	520	310	210	540	
3400	520	310	210	540	
4300	555	330	225	575	
5100	585	345	240	610	

Mounting Room - NovaTaur Residential					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
2500	455	290	165	450	

TAUREAN® RESIDENTIAL SECTIONAL DOORS - CLASSIC RANGE



Linea: Grooved / Lined



Tempo: Pressed Squares



Western: Pressed Rectangles



Silk: Flat Panels

AVAILABLE IN WOODGRAIN STANDARD COLORBOND® STEEL WOODGRAIN TIMBERGRAIN & WOODGRAIN POWDERCOATED COLOURS

Height	# Panels	WIDTH																				
		1820 to 2500	2501 to 2800	2801 to 3200	3201 to 3700	3701 to 4150	4151 to 4450	4451 to 4740	4741 to 4950	4951 to 5510	5511 to 5930	5931 to 6050										
1920, 1940, 1960, 1980, 2000, 2020, 2040, 2060, 2080, 2100, 2120, 2140, 2160, 2180	4																					
2200, 2225, 2250, 2275	5																					
2300, 2325, 2350, 2375, 2400, 2425, 2450	5																					
2475, 2500, 2525, 2550, 2575, 2600, 2625, 2650, 2675, 2700, 2725	5																					
2760, 2790, 2820, 2850, 2880, 2910, 2940, 2970, 3000	6																					

Tapers for Sloping Floors – Classic Sectional Doors



Taurean Classic Sectional Doors are available with a tapered bottom panel to suit floors with a slope across the door opening. Minimum and maximum taper sizes apply, please contact Taurean Customer Service on 1800 778 658 or via customerservice@taureands.com.au for further information.

LOW HEADROOM KIT- FRONT MOUNTED ONLY - MINIMUM HEADROOM 2200mm

Product Details	Length	Code	Unit
SD Track Pair LHR 2.591	2591	SDTPRLHRGA2591	Ea
SD Track Pair LHR 2.895	2895	SDTPRLHRGA2895	Ea
SD Track Pair LHR 3.200	3200	SDTPRLHRGA3200	Ea
SD Track Kit Bag LHR		SDTKITBLHR	Ea


Please refer to the Taurean website (www.taureands.com.au) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.

TAUREAN® RESIDENTIAL SECTIONAL DOOR INSTALLATION - KEY POINTS

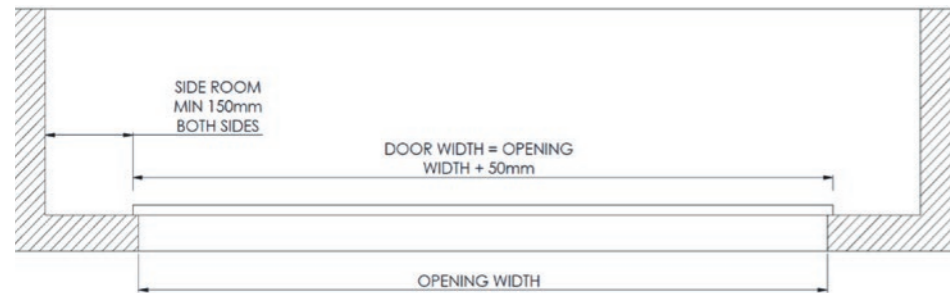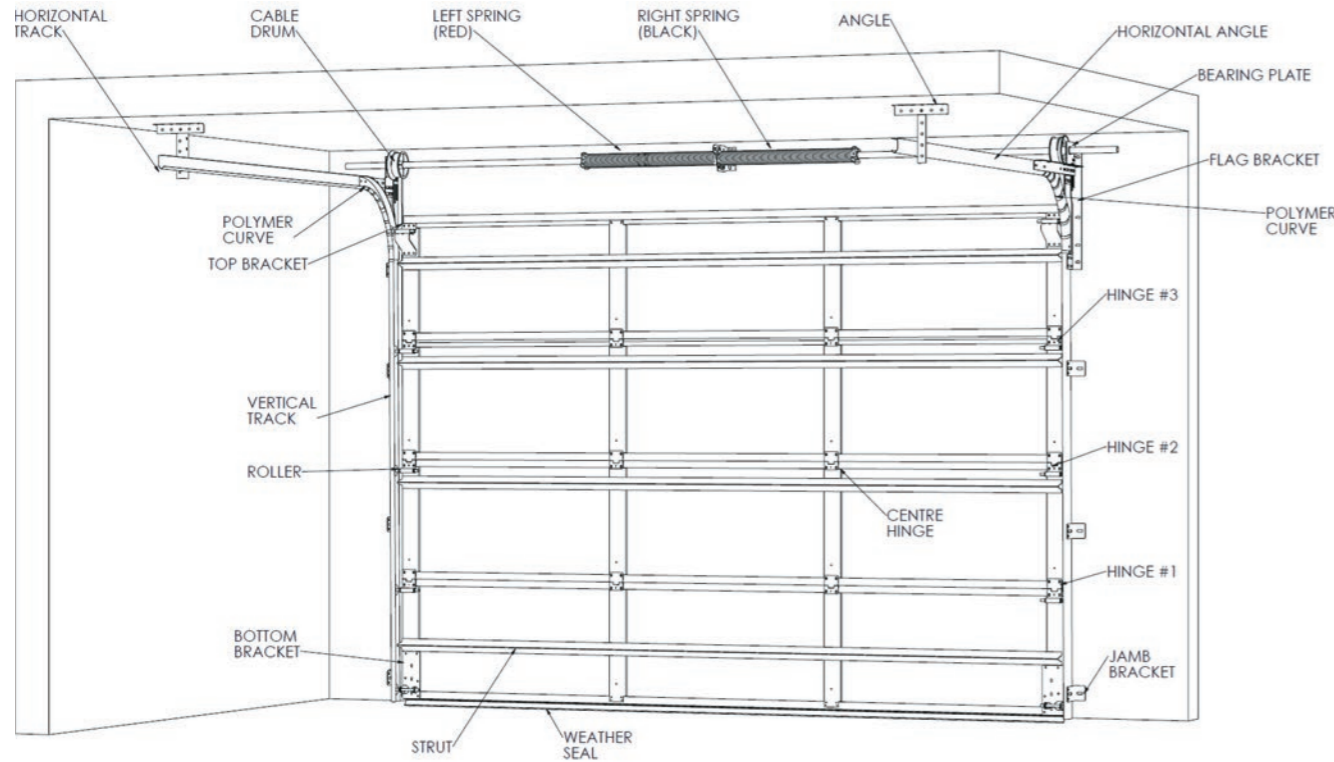

Check opening height and door size.

- a. 25-30mm overlap on each side and >10mm at top.
- b. At least 150mm side room required.

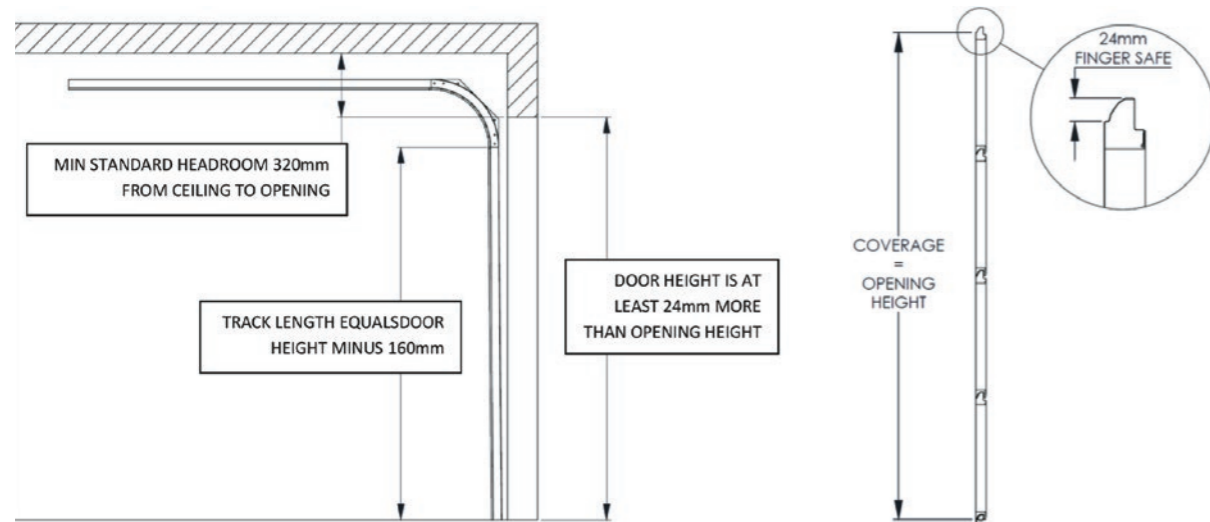

Please refer to the Taurean website (www.taureands.com.au) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.

TAUREAN® NOVATAUR ROLLER DOORS

Taurean NovaTaur Residential Roller Door

Product Details	Finish	Code	Unit
Taurean NovaTaur Residential Roller Door	Col	RNR25COLwww	Ea

COLORBOND® steel colours												
Height (mm)	Width											
	2500 to 2550	2551 to 2800	2801 to 3100	3101 to 3600	3601 to 3750	3751 to 4100	4101 to 4350	4351 to 4800	4801 to 5100	5101 to 5400	5401 to 5500	5501 to 6000
2500												

Taurean NovaTaur Commercial Roller Door

Product Details	Finish	Code	Unit
Taurean NovaTaur Commercial Roller Door	ZA Col	RNChhZAwwww RNChhCOLwww	Ea Ea

Height (mm)	Width							
	2500 to 2800	2801 to 3100	3101 to 3430	3431 to 3750	3751 to 4350	4351 to 5100	5101 to 5500	5501 to 6000
2500								
3100								
3400								
4300								
5100								

Product Details	Code	Unit
Planetary Gear Chain System	RDPLANETGEAR	Ea


It is recommended that Planetary Gear Chain operating system be fitted to doors in shaded areas. Planetary Gear system MUST NOT be used when an electric operator is fitted.

TAUREAN ROLLER DOOR PACKAGING OPTIONS

Packaging Product Details	Code	Unit
Cardboard Box up to 3430 door width	RDCHRGPACK9	Ea
Cardboard Box up to 3710 door width	RDCHRGPACK10	Ea
Cardboard Box up to 4930 door width	RDCHRGPACK19	Ea
Enviropack 1 single layer cardboard outer up to 3430mm door width	RDCHRGPACK15	Ea
Enviropack 1 single layer cardboard outer up to 3431 - 5400mm door width	RDCHRGPACK16	Ea
Enviropack 2 double layer cardboard outer up to 3430mm door width	RDCHRGPACK17	Ea
Enviropack 2 double layer cardboard outer up to 3431 - 5400mm door width	RDCHRGPACK18	Ea
Metal Wrap Packaging per lineal metre	RDCHRGPACK2	Ea


TAUREAN PERSONAL ACCESS (PA) DOOR

Pre-Hung Personal Access Door

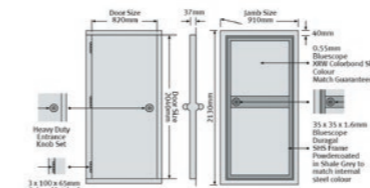

Pre Hung PA Door 2040 x 820mm	ZA COL	PADJ2040820ZA PADJ2040820X***	Ea Ea
Pre Hung PA Door 2040 x 920mm	ZA COL	PADJ2040920ZA PADJ2040920X***	Ea Ea

Standard Personal Access Door

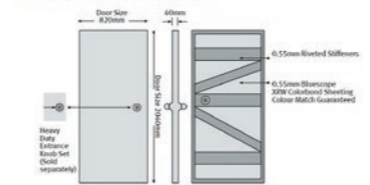

Personal Access (PA) Door 2040 x 820mm	ZA COL	PAD2040820ZA PAD2040820X***	Ea Ea
Personal Access (PA) Door 2040 x 920mm	ZA COL	PAD2040920ZA PAD2040920X***	Ea Ea

SPECIFICATIONS

- Taurean Door Systems standard offer is a single skin metal clad door: 2040mm high x 820mm wide x 37mm thick and 2040mm high x 920mm wide x 37mm thick
- Metal cladding is 0.55mm thick COLORBOND® steel
- Outward swing is standard
- Heavy duty Knob/Knob Lockset as standard (with Pre-Hung Door only), Lever/Knob available upon request
- Chrome cabin hook supplied as standard (with Pre-Hung Door only)
- Pre-Hung version comes with three, 100 x 65 x 2mm high quality colour matched hinges

Please refer to the Taurean website (www.taureands.com.au) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.

TAUREAN® ROLLER DOOR ACCESSORIES

Product Details	Code	Unit
Roller Door Openers - Merlin		
RD Motor SilntDrv Elite 855BBU..... Max door area = 18m ² Max door weight = 120kg	RDMOTORSE855BB	Ea
RD Motor SilntDrv Elite 855MYQ..... Max door area = 18m ² Max door weight = 120kg	RDMOTORSE855MQ	Ea
RD Motor SilntDrv Essen 655MYQ Max door area = 16.5m ² Max door weight = 100kg	RDMOTORSS655MQ	Ea
RD Motor Weather Drive 550EVO Max door area = 15m ² Max door weight = 100kg IP 34 Housing Rating	RDMOTORWD55EVO	Ea
Roller Door Openers - GRIFCO		
RD Motor eDrive 2.0 (ML5102 Kit) Left Hand..... Max door area with 150mm drum = 36m ² Max door area 200mm drum = 50m ²	RDMOTORED20KL	Ea
RD Motor eDrive 2.0 (ML5102 Kit) Right Hand Max door area with 150mm drum = 36m ² Max door area 200mm drum = 50m ²	RDMOTORED20KR	Ea
Grifco LR-Drive (GLD-RDO)..... Max door area Standard = 28m ² Max door area WindLocked = 22m ² Max door weight = 270kg	RDMOTOR1300LRD	Ea
Sectional Door Operators - MERLIN		
SD Motor ComElite 105BBU.....	SDMOTCE105BB	Ea
SD Motor ComElite 105MYQ.....	SDMOTCE105MQ	Ea
SD Motor ComEssen 65MYQ.....	SDMOTCS65MQ	Ea
SD Motor ComUlt 3800MYQ.....	SDMOTCU3800MQ	Ea
SD Motor ComExt 125 2.4C MYQ.....	SDMOTCX125C24	Ea
SD Motor ComExt 125 2.4R BBU.....	SDMOTCX125X24B	Ea
SD Motor ComExt 125 3.0R BBU.....	SDMOTCX125X30B	Ea
SD Motor Whisper Drive 3850EVO.....	SDMOTWD3850EVO	Ea
Operator Accessories		
RD Merlin Evercharge Standby Power Unit.....	RDMERECSPBU	Ea
Merlin Battery Backup Kit - Suitable for residential roller & sectional door operators.....	RDMOTORBBU	Ea
RD Merlin handset 3 button Chl.....	RDMERHS3B3C	E
RD Merlin handset Mini 3 button transmitter.....	RDMERHSM3B3C	Ea
4 Button Hand Transmitter.....	RDMERHSM4B52	Ea
RD Merlin Keyed Cable Release Steel.....	RDMECABRELKSF	Ea
RD Merlin Keypad Wireless S2.0.....	RDMERKPWS2	Ea
RD Merlin Connect Bundle MYQ.....	RDMERCONBMYQ	Ea
RD Merlin Remote Light LED MYQ.....	RDMERLEDMYQ	Ea
Wall Mount Wireless TrioCode.....	RDGDOHSMW	Ea
TrioCode Wireless Keypad.....	RDGDOKPW	Ea

Please refer to the Taurean website (www.taureands.com.au) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.

TAUREAN® PRODUCT WARRANTY

Stramit Corporation Pty Limited Roller Door Warranty and Exclusion of Liability Statement

This Warranty is given by:
Stramit Corporation Pty Limited trading as Taurean Door Systems (Taurean)
1051 Nudgee Road, Banyo, QLD, 4014
Phone: (03) 9721 8366 | Email: customerservice@taureands.com.au | Website: www.taureands.com.au

On Taurean® roller door kits (Product) for a twelve-month period from the date of purchase of the Product, against defects which is subject to the matters set out below (Warranty).

The Warranty is in addition to your rights and remedies that may be available to consumers under the Australian Consumer Law. If you are a consumer, as defined under the Australian Consumer Law, our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

This Warranty applies only where:

- The purchaser seeking to rely on the Warranty presents proof of purchase to confirm the date of purchase of the Product;
- If the Product has been installed, an authorised Taurean Door reseller or professional roller door installer (Authorised Installer) performed the installation; and
- Taurean determines, in its absolute discretion, that the Product has a defect covered by this Warranty.

Your Product Warranty does not apply to any defect, loss or damage arising through or caused directly or indirectly by, or as a result of:

- Fair wear and tear (e.g. working seals in the inlet and outlet valves, scratching from cleaning, paint rubs or scuffing on the internal wash coat finish or external painted finish etc.);
- Any defects or deterioration of timber, including drying, after installation of the Product;
- Any weakening, cracking, deterioration, or collapse of the structure or surface, during installation or use, to which the Product is (or is intended to be) affixed;
- Incorrect storage or handling of the Product after delivery;
- Failure to properly install, use or maintain the Product, or to follow any instructions or guidelines for installation, use or maintenance of the Product, including carrying out regular servicing or preventative maintenance;
- The continued use or operation of the Product after any defect becomes apparent, or would have become apparent to a reasonably prudent operator or user;
- Installation, adjustment or use of the Product, other than by Taurean or an Authorised Installer;
- Attempted or completed modifications or repairs to the Product carried out by a person who is not authorised by Taurean to carry out such modifications or repairs;
- The use of the Product, within 800 metres of the sea or other body of water of equivalent or greater salt concentration or in an area subject to chemical or industrial fall out, or otherwise than for any application specified on a quote or order form, price book or catalogue issued by Taurean; or
- Any accident or act of God.

To make a valid claim under this Warranty, a person must submit a claim in writing to Taurean at the abovementioned address within twelve months from the date of purchase of the Product. The claim must include:

- A copy of this Warranty;
- A description and evidence of (e.g. photo) how the Product is defective;
- The date on which the person making the claim discovered the defect;
- Proof of the date of purchase of the Product in the form of an invoice or receipt; and
- If the Product has been installed, proof of the date of installation of the Product in the form of an invoice or receipt from an Authorised Installer.

Where a valid Warranty claim is made in accordance with clause 6 above, Taurean will investigate the claim, and requires reasonable and adequate access to Products, to undertake its investigation. If a Warranty service call finds that your Product does not have a genuine manufacturing defect, or the claim is resolved by a regular service (that comes under the responsibility of the purchaser) Taurean reserves the right to charge you a service fee.




To the fullest extent permitted by law, Taurean expressly excludes all conditions, warranties and undertakings in relation to the Products except as set out in this document.

To the fullest extent permitted by law, and subject to and without limiting your consumer rights under the Australian Consumer Law, Taurean expressly limits its liability under this Warranty and under any other statutory guarantee imposed at law to, at its absolute discretion:



- Replacing or repairing the Product;
- The supply of an equivalent Product; or
- The payment of the cost of the Product, or of repairing the Product, or of acquiring an equivalent Product.

This Warranty is not transferrable, and only applies to the original purchaser. Wherever the Product is sold by any person other than Taurean, such person has no authority whatsoever from Taurean to give any express warranty or guarantee on any Taurean product in addition to this Warranty.

FENCING • ACCESSORIES

Product Fencing/Accessories	Product Details	Code	Finish	BMT mm	TCT mm	Unit
Infill Sheets	Stramit Monoclad® sheeting					
	Stock lengths Only available in Domain, Grey Ridge, Meadow, Summershade, Terrace	SFMCF---1790	Double Sided	0.35	0.40	each
Rails Top & Bottom						
	COL 2360mm	SFR---2360	Painted			each
Post						
	COL 2400mm	SFP---2400	Painted			each

STRAMIT UNIGUARD™ FIRE RESISTING WALL SYSTEM

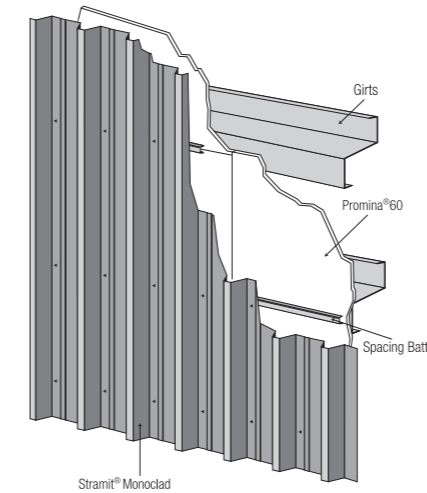



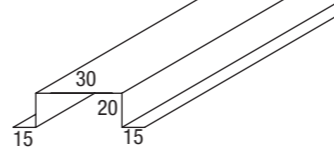
Stramit Uniguard™ Fire resisting wall system is a superior fire rated wall cladding product that combines the single layer of specialist fireboard **Promina®60** with your choice from **Stramit Monoclad®**, **Stramit Corrugated®** and **Stramit Longspan®** wall cladding products.

The **Stramit Uniguard™ Fire resisting wall system** is suitable for an external wall system for single storey Class 7b and 8 buildings of Type C construction as defined in the Building Code of Australia (BCA96).

Note: System must be designed and installed strictly in accordance with **Stramit Uniguard™ Fire Resisting Wall System Technical Manual**.

Using only the products specified and certified for the application as detailed in the technical manual and/or accreditation report.

Promina® 60 board can not be purchased independently of other Stramit Uniguard™ wall system components.

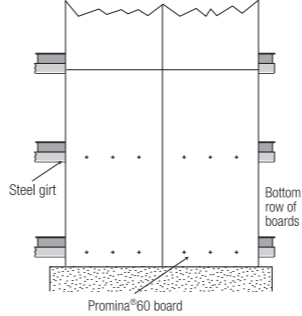Product	Size mm	Code	BMT mm	Unit
Promina®60				
	15 x 2400 x 1200	PB601224		each
Fasteners				
	10 x 40 Wing Tek (For fixing Promina®60 to girts)	S1040WNGT		per 500
Sheeting	Available in your choice of: Stramit® Corrugated Stramit Monoclad® Stramit Longspan®			
Accessories				
	Spacing Batten For Stramit Uniguard™		0.55	lin metre

WESTERN AUSTRALIA STANDARD PRODUCT OFFER

PRODUCT – Roofing/Cladding	BMT	BAS	CLC	COV	CTG	DCLC	DOC	DPPB	DSUR	DUN	EVH	GA	GLY	IST	JAS	MGV	MNR	MON	NTS	PEC	PPB	SHG	SUR	TRN	TVTS	WDG	WLB	WSP	ZA
Stramit Monoclad®	0.35	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
	0.42	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
	0.48	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit Corrugated®	0.42	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
	0.48	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit® Curving Quality	0.60	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit Speed Deck Ultra®	0.42	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
	0.48	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit Longspan®	0.42	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
	0.48	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A

RAINWATER PRODUCTS

PRODUCT	BMT (mm)	BAS	CLC	COV	CTG	DOC	DUN	EVH	GA	GLY	IST	JAS	MGV	MNR	MON	NTS	PEC	PPB	SHG	SUR	TRN	TVTS	WDG	WLB	WSP	ZA	
Stramit® Roll Top Ridge	0.40	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit® Valley Folded	0.40	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit® Flashings & Others	0.40	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit® Roll Top Ridge	0.55	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit® Valley Folded	0.55	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit® Flashings & Others	0.55	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit Easiline® Commercial Gutter	0.55	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit Easiline® Patio Gutter	0.42	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit Easiline® Domestic Gutter	0.42	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit Strongline® Gutter	0.55	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit Trad-Line™ Gutter	0.55	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit Strongline® Fascia	0.60	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit® Downpipes 95x45		A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit® Downpipes 100x50		A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit® Downpipes 100x100		A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit® Downpipes 75x50		A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit® Downpipes 75 round		A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Stramit® Downpipes 100 round		A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A

A = AVAILABLE

Other non standard colours may be available subject to minimum order quantities. Please refer to our nearest sales office.

PREMIUM PRODUCTS – COLORBOND® ULTRA STEEL

PRODUCT – Roofing/Cladding/Rainwater	BMT (mm)	Dune	Monument	Surfmist	Windspray	Wallaby	Woodland Grey
Stramit® Corrugated	0.42	A	A	A	A	A	A
Stramit® Corrugated	0.48	A	A	A	A	A	A
Stramit Monoclad®	0.42	A	A	A	A	A	A
Stramit Monoclad®	0.48	A	A	A	A	A	A
Stramit Longspan®	0.42	A	A	A	A	A	A
Stramit Longspan®	0.48	A	A	A	A	A	A
Stramit Speed Deck Ultra®	0.42	A	A	A	A	A	A
Stramit Speed Deck Ultra®	0.48	A	A	A	A	A	A
Stramit® Roll Top Ridge	0.55	A	A	A	A	A	A
Stramit® Valley Folded	0.55	A	A	A	A	A	A
Stramit® Flashings & Others	0.55	A	A	A	A	A	A
Stramit® Downpipes 95 x 45	0.55	A	A	A	A	A	A
Stramit® Downpipes 100 x 50	0.55	A	A	A	A	A	A
Stramit® Downpipes 100 x 75	0.55	A	A	A	A	A	A
Stramit® Downpipes 100 x 100	0.55	A	A	A	A	A	A

Please refer to Sales office for lead times and availability.

PREMIUM PRODUCTS – COLORBOND® METALLIC STEEL

PRODUCT – Roofing/Cladding/Rainwater	BMT (mm)	Citi	Cortex	Conservatory	Skybridge	Axis	Facade
Stramit® Corrugated	0.48	A	A	A	A	A	A
Stramit Monoclad®	0.48	A	A	A	A	A	A
Stramit Longspan®	0.48	A	A	A	A	A	A
Stramit Speed Deck Ultra®	0.48	A	A	A	A	A	A
Stramit® Roll Top Ridge	0.55	A	A	A	A	A	A
Stramit® Valley Folded	0.55	A	A	A	A	A	A
Stramit® Flashings & Others	0.55	A	A	A	A	A	A
Stramit® Downpipes 95 x 45	0.55	A	A	A	A	A	A
Stramit® Downpipes 100 x 50	0.55	A	A	A	A	A	A
Stramit® Downpipes 100 x 75	0.55	A	A	A	A	A	A
Stramit® Downpipes 100 x 100	0.55	A	A	A	A	A	A

Please refer to Sales office for lead times and availability.

FENCING

PRODUCT – Cladding/Accessories	BMT (mm)	Harvest	Terrace	Meadow	Willow	Evergreen	Red Oak	Domain	Hedge	Teatree	Grey Ridge	Bluestone	Riversand	Estate	Summershade	Eclipse
Stramit Monoclad® Double Sided	0.35	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Post & Rails		A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Lattice		A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Decorative Post Balls		A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Gates		A	A	A	A	A	A	A	A	A	A	A	A	A	A	A

Please refer to Sales office for lead times and availability of non standard colours.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

TERMS & CONDITIONS OF SALE

View our latest Terms and Conditions of Sale here: <https://www.stramit.com.au/terms-and-conditions/>



WESTERN AUSTRALIA



stramit.com.au