

# PRODUCT AND SERVICE GUIDE

**EFFECTIVE MARCH 2024**

Supersedes October 2020

**TOWNSVILLE**

Ph 07 4412 3900

[townsville@stramit.com.au](mailto:townsville@stramit.com.au)

**CAIRNS**

Ph 07 4034 6555

[cairns@stramit.com.au](mailto:cairns@stramit.com.au)

## CONTACT US

### How can we help you?

#### Customer Service, Sales and all General Enquiries

To place an order, request a quote, or receive tailored customer support, please contact your local branch.

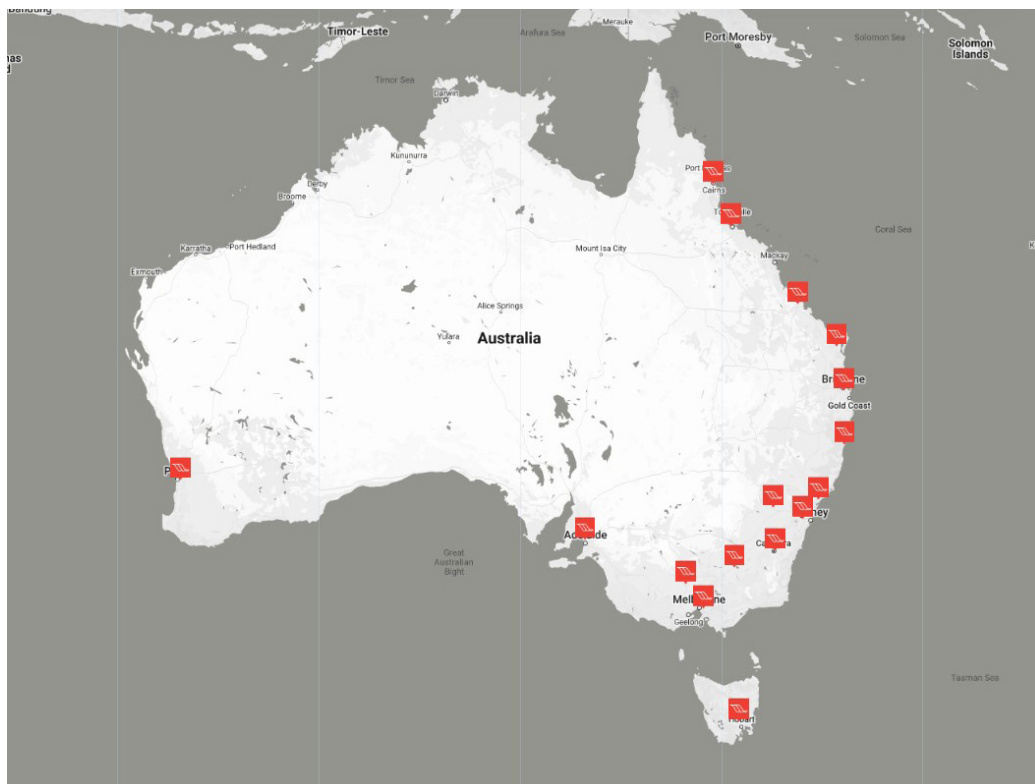
Check the locations page opposite for the phone number and address of your nearest Stramit branch.

For general enquiries, email [contactus@stramit.com.au](mailto:contactus@stramit.com.au)

For order enquiries, email [orders@stramit.com.au](mailto:orders@stramit.com.au)

#### Technical Services

For specification and technical support, email [techsupport@stramit.com.au](mailto:techsupport@stramit.com.au)



## SERVICE LOCATIONS

The Stramit web page can be found at **stramit.com.au**.

Details of many Stramit® products can also be seen on the AIA site

'Product Selector' **selector.com.au** or **SteelSelect.com.au**.

			ORDER CUT-OFF TIMES <sup>2</sup>		
REGION	LOCATION	CONTACT DETAILS	STANDARD DELIVERY	SHED BUNDLE LEAD TIME <sup>3</sup>	PICK-UP HOURS <sup>4</sup>
NSW & ACT	SYDNEY 33-83 Quarry Rd, Erskine Park NSW 2759	Ph 02 9834 0909	4pm	21 Days	7am - 4pm
	CANBERRA 4 Bass St, Queanbeyan NSW 2620	Ph 02 6298 2500	4pm	21 Days	7am - 4pm
	COFFS HARBOUR 6 Mansbridge Dr, Coffs Harbour NSW 2450	Ph 02 6656 3800	4pm	21 Days	7am - 4pm
	NEWCASTLE TBA	Ph 02 4041 3400	4pm	21 Days	N/A
	ORANGE 51 Leewood Dr, Orange NSW 2800	Ph 02 6360 9200	4pm	21 Days	7am - 4pm
VIC	MELBOURNE 3/1464 Ferntree Gully Rd, Knoxfield VIC 3180	Ph 03 9237 6300	4pm	12.30pm	7am - 4pm
	ALBURY 18 Ariel Dr, Albury NSW 2640	Ph 02 6092 3700	4pm	21 Days	7am - 4pm
	BENDIGO Lot 7-9 Ramsay Court, Kangaroo Flat VIC 3555	Ph 03 5448 6400	4pm	21 Days	7am - 4pm
TAS	HOBART 57 Crooked Billett Dr, Brighton TAS 7030	Ph 03 6262 8788	4pm	21 Days	7am - 4pm
SA	ADELAIDE 11 Stock Rd, Cavan SA 5094	Ph 08 8219 20001	4pm	21 Days	7am - 4pm
South QLD	BRISBANE 57-71 Platinum St, Crestmead QLD 4132	Ph 07 3803 9999	4pm	12.30pm	7am - 4pm
	MARYBOROUGH 10 Activity St, Maryborough QLD 4650	Ph 07 4123 9500	4pm	21 Days	7am - 4pm
	ROCKHAMPTON 41 Johnson St, Parkhurst QLD 4702	Ph 07 4921 5600	4pm	21 Days	7am - 4pm
North QLD	CAIRNS 53 Vickers St, Edmonton QLD 4869	Ph 07 4034 6555	4pm	21 Days	7am - 4pm
	TOWNSVILLE 402-408 Bayswater Rd, Garbutt QLD 4814	Ph 07 4412 3900	4pm	21 Days	7am - 4pm
WA	PERTH 605-615 Bickley Rd, Maddington WA 6109	Ph 08 9493 8800	4pm	12.30pm	7am - 4pm

<sup>1</sup> Business days only (excludes weekend and public holidays).

<sup>2</sup> Days only (excludes weekend and public holidays). Standard 48hr Delivery refers to order cut-off times for standard lead-time products as defined in our Product and Services Guide. Please be aware that some products have minimum lead times that may exceed these lead times. Please check the product listing in our Product and Services Guide or check with your local branch when placing order.

Additional charges may apply. Check with your local branch for capacity when ordering.

Our service proposition is based around available manufacturing capacity on any given day. Demand can fluctuate and impact lead times. Please check with your local branch when placing your order.

This Service Offer excludes large orders related to Commercial projects or Consolidated Shed orders.

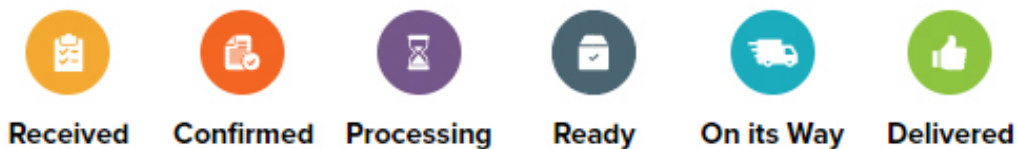
\* Registered trademarks of Stramit Corporation Pty Limited. ABN 57 005 010 195 trading as Stramit Building Products. A member of the Fletcher Building Group. TRUECORE®, COLORBOND®, ZINCALUME® and \* colour names are registered trade marks of BlueScope Steel Limited.™ colour names are trade marks of BlueScope Steel Limited. ABN 16 000 011 058. © Stramit Corporation Pty Limited. This information is accurate at March 2024.

This document replaces all previous issues. Please destroy, or clearly mark as superseded, all previous issues. STR066\_MAR24.

## CUSTOMER PORTAL

### Keeping up to date with your order, made simple.

Our secure Customer Portal gives you access to the status of your orders whenever, and wherever, you need an update. The portal lets you track your orders live, from the time our Customer Service team enters it, through processing and manufacturing, while it's being picked and packed and when it's out for delivery to you.



As an account customer, our portal allows you to:

- Track your order in real time
- Search current and historical orders to see related information
- Download your order confirmations
- See order details in granular detail
- Download Proof of Delivery (PODs)
- View Estimated Time of Arrivals (ET As) for your deliveries
- See when an order is Ready to Pick Up
- Share the order tracking with another party, e.g. an installer or end customer

Designed to make doing business easier with Stramit, the Customer Portal is available on any internet connected device and only requires registration - no downloads needed.

Register your interest today at:

<https://www.stramit.com.au/resources/design-software/stramit-customer-portal/>

## ORDERING

For Trade and Account Customers seeking takeoffs and quotes, please send drawings and information to: [takeoffs@stramit.com.au](mailto:takeoffs@stramit.com.au)

Please contact and email all your orders through to your local branch.

For Purl in Orders, please also send through your drawings and NC Files to your local branch to aid in order accuracy.

For Flashings Orders, we require drawings to ensure accurate manufacturing of your products. Please email your drawings through when placing your order. You can find our Flashing Order Form on our website under **Resources**.

All products manufactured or purchased specifically to your requirements cannot be returned. Stock items may be returned for credit, although restocking fees will apply.

For Order Pickups, please refer to our Loading Requirements Guide on our website under **Resources**.

## INDEX

### PRODUCTS AND SERVICE GUIDE

Selecting Your Product – Cover, & Pitch	2
Product Availability – Finish and Colour	3
Standard Delivery Charges	4
Delivery Information	5
OPU Load Guidelines	6-7
Delivery Schedules	8
Quick Roofing Estimate	9

### ROOFING/CLADDING

<b>Stramit® Corrugated</b>	10
<b>Stramit® Curving Quality</b>	11
<b>Stramit Monoclad®</b>	12
<b>Stramit Longspan®</b>	13
<b>Stramit Speed Deck Ultra®</b>	14
<b>Stramit CapacityPLUS™ 660</b>	16
<b>Stramit® C-Clad 280</b>	16
<b>Stramit Premier 300™</b>	16
<b>Stramit K-Panel®</b>	16
<b>Stramit Minirib®</b>	16
<b>Stramit Mini Corry®</b>	16
Acoustic Products	17
<b>Stramit Sharpline®</b>	17
Acoustic Accessories	
(Touch-Up Paint, Silicone & Rotary Vents)	18
Fasteners – Cyclonic Areas	19-20

### INSULATING PRODUCTS

Foil, Blanket, Wire	21
---------------------	----

### METAL FASCIA & BARGE

<b>Stramit® Fascia &amp; Accessories</b>	22
--	----

### GUTTER & DOWNPIPE

<b>Stramit® M Pattern, Stramit® Barge Capping</b>	23
<b>Stramit® Quad 150 &amp; Accessories</b>	24
<b>Stramit Queenslander Quad®, Stramit® Quad 175</b>	25
<b>Stramit® 150 Half Round Gutter</b>	26
<b>Stramit® Flatback Half Round &amp; 200 Half Round Gutter</b>	27
<b>Stramit® Downpipe – Rectangular</b>	28
<b>Stramit® Downpipe – Round, PVC Downpipes &amp; Accessories</b>	29

### FLASHINGS

<b>Stramit® Custom Flashings – Ordering Procedure</b>	30
<b>Stramit® Custom Flashings</b>	31-35
<b>Stramit® Customer Order – Flashing Detail Sheet</b>	36

### PREMIUM PRODUCTS

<b>Product Availability</b>	37
<b>COLORBOND® steel</b>	38
<b>Stramit® Roofing, Cladding, Valleys &amp; Ridges</b>	39-40
<b>Stramit® Fascia, Gutters &amp; Accessories</b>	41-42
<b>Stramit® Custom Flashings</b>	43-45
<b>Stramit® MagnaFlow® – Roofing, Cladding, Rainwater</b>	46

### NON-STANDARD RAINWATER AND FLASHINGS

Non Standard Rainwater Head Guide	48
Builder's Products	49
Rainwater Caps/Rainheads/Overflows/Roof Ventilation	50
Vented Ridge	50
<b>Stramit® Sumps/Adj Box Gutter Brackets/Safe Trays</b>	51

### STRUCTURAL COMPONENTS

<b>Stramit® Stud Sections</b>	52
<b>Stramit® Roof &amp; Ceiling Battens, Top Hats</b>	53
<b>Stramit® C &amp; Z Purlins (Z350 Coating), Stramit® Eave Purlins</b>	54
<b>Stramit® Purlins Bridging Hole Punching</b>	55
<b>Stramit® Purlins &amp; Girts AISC Bridging System</b>	56
<b>Stramit® Purlins &amp; Girts General Accessories</b>	57-58
<b>Stramit® Purlins &amp; Girts Order Form</b>	59
<b>Stramit® Purlins &amp; Girts Accessories Order Form</b>	60
<b>Stramit® Bridging Accessories Order Form</b>	61
<b>Stramit® C &amp; Z Purlins (ZAM Coating)</b>	62
<b>Stramit® Purlins &amp; Girts</b>	
AISC Bridging System ( <b>ZAM Coating</b> )	63-65
<b>Stramit® Purlins &amp; Girts Accessories (ZAM Coating)</b>	66-67

### FIREWALL/FLOORING/FORMWORK SYSTEMS

<b>Stramit Uniguard™ Fire Resisting Wall System</b>	68
<b>Stramit Condeck HP®, Stramit® Edgeforma</b>	69
<b>Stramit® Flooring</b>	70

### STRAMIT HOME IMPROVEMENT PRODUCTS

Stramit Fencing & Accessories	71
Stramit Sunset Patio Deck	72
Patio Deck Accessories	73

### ROLLER DOORS AND ACCESSORIES

Residential and Light Industrial Roller Doors	74
Residential Roller Doors	75
Residential Sectional Doors	76
Residential Sectional Door Installation	77
Novataur Residential, Commercial Roller Doors & Personal Access (PA) Doors	78
Roller Door Accessories	79
Roller Door Product Warranty	80

### GENERAL ORDER INFORMATION

COLORBOND® steel / ZINCALUME® steel Care & Maintenance	82
Site Delivery Instruction Form	83
Sales Order Form	84

### TERMS AND CONDITIONS OF SALE

86-89

### IMPORTANT NOTE: HANDLING AND STORAGE

Roofing and cladding sheets, when stored on site must be kept dry by storing under cover.














Wet storage stains can occur from condensation even in dry weather. Do not leave goods with strippable plastic coating in direct sunlight.



**CAIRNS**  
TEL (07) 4034 6555  
FAX (07) 4034 6511

**TOWNSVILLE**  
TEL (07) 4412 3900  
FAX (07) 4412 3909

SELECTING YOUR PRODUCT - COVER & PITCH

Product Roofing/Cladding	Page	BMT mm	TCT mm	Cover Width mm	Weight kg/m <sup>2</sup>	Minimum Pitch
<b>Stramit® Corrugated</b> 	10	0.42	0.47	762	4.35	5 Degrees
		0.48	0.53	762	4.93	(1 in 12)
Fixing Screws required = 3/sheet/batten						
<b>Stramit® Curving Quality</b> 	11	0.60	0.65	762	6.09	5 Degrees (1 in 12)
<b>Ex Brisbane</b> Fixing Screws required = 3/sheet/batten						
<b>Stramit Monoclad®</b> 	12	0.42	0.47	762	4.35	2 Degrees
		0.48	0.53		4.93	(1 in 30)
Fixing Screws required = 4/sheet/batten						
<b>Stramit Longspan®</b> 	13	0.42	0.47	700	4.73	3 Degrees
		0.48	0.53	700	5.37	(1 in 20)
<b>Ex Townsville</b> Fixing Screws required = 3/sheet/batten <b>2 degree minimum pitch residential only.</b>						
<b>Stramit SharpLine® Direct Fix - 25mm</b>  - 38mm	14	0.55	0.60	290	6.14	3 Degree
		0.55	0.60	490	5.45	3 Degree
		0.55	0.60	265	6.72	3 Degree
		0.55	0.60	465	5.74	3 Degree (1 in 20)
Fixing screws required = 1/sheet/batten						
<b>Stramit SharpLine® Clip Fix - 25mm</b>  - 38mm	14	0.55	0.60	320	5.56	3 Degree
		0.55	0.60	520	5.13	3 Degree
		0.55	0.60	285	6.25	3 Degree
		0.55	0.60	485	5.50	3 Degree (1 in 20)
Fixing screws required = 2 per clip for both metal & timber						
<b>Stramit Speed Deck Ultra®</b> 	14	0.42	0.47	700	4.73	1 Degree
		0.48	0.53	700	5.41	(1 in 60)
<b>Ex Townsville</b>						
<b>Stramit CapacityPLUS™ 660</b> 	14	0.42	0.47	660	4.97	1 Degrees
		0.48	0.53		5.64	(1 in 60)
<b>Ex Brisbane</b> Fixing Screws required = 3/sheet/batten						
<b>Stramit Mini Corry®</b> 	15	0.42	0.47	825	4.01	<b>Walls only</b>
<b>Ex Sydney</b> Fixing Screws required = 7/sheet/batten						
<b>Stramit Minirib®</b> 	15	0.42	0.47	900	3.68	<b>Walls only</b>
<b>Ex Brisbane</b> Fixing Screws required per metre square = 4/sheet/batten						
<b>Stramit K-Panel®</b> 	15	0.35	0.40	864	3.17	<b>Walls only</b>
<b>Ex Brisbane</b> Fixing Screws required = 4/sheet/batten						
<b>Stramit® C-Clad 280</b> 	15	0.55	0.60	280	5.85	<b>Walls only</b>
<b>Ex Brisbane</b> Fixing Screws required 1/sheet/batten						
<b>Stramit Premier 300™</b> 	15	0.55	0.60	300	6.03	<b>Walls only</b>
<b>Ex Brisbane</b> Fixing Screws required 1/sheet/batten						

TCT = Total Coated Thickness. This is a nominal dimension. It should not be used in specifications due to variances in Coating and paint finish.  
BMT = Base Metal Thickness. This is thickness of steel only and together with minimum yield strength and rolled profile provides the basis for calculation of the structural needs of a system. It should be referred to in specifications followed by the letters BMT.  
† NOT suitable for roofing or cyclonic conditions. **NOTE: Technical details displayed in this book are a guide only. For further informaton please consult the relevant Stramit Technical Manual.**



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

PRODUCT AVAILABILITY – FINISH & COLOUR

Product/Roofing/Cladding	BMT	ZA	GA	BAS	CLC	CTG	COV	DOC	DUN	EVH	GLY	IST	JAS	MGV	MNR	MON	NTS	PEC	PPB	SHG	SUR	TRN	WLB	WDG	WSP
Stramit Monoclad®	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	0.48	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
Stramit® Corrugated	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	0.48	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
Stramit® Curving Quality	0.60	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Speed Deck	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	0.48	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
Stramit Longspan®	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	0.48	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
Stramit® CapacityPLUS 660	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	0.48	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® C-Clad 280 (Ex Brisbane)	0.55	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit Premier 300™ (Ex Brisbane)	0.55	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit Minirib® (Ex Brisbane)	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit K-Panel® (Ex Brisbane)	0.35	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	✓		✓	✓		✓
	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit Mini Corry® (Ex Sydney)	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Fascia	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Valley (Ribbed)	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Valley Folded	0.60	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Roll Top Ridge 450	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Edge Roll 50mm 2m	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Edge Roll 50mm 3m	0.40	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Roll Barge Cap	0.40	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® M Pattern	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® S Pattern (Ex Brisbane)	0.42	✓			✓	✓		✓	✓						✓	✓	✓	✓	✓	✓	✓			✓	✓
Stramit® QLD Slotted Quad	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Quad 150 (Ex Brisbane)	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Quad 175 (Ex Brisbane)	0.55	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Half Round Gutter 150	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Downpipe 100 X 75	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Downpipe 85 / 100	0.40	✓	▲	✓	▲	✓	✓	▲	▲	▲	✓	▲	▲	✓	▲	▲	✓	▲	▲	✓	✓	✓	✓	▲	▲
Product/Roofing/Cladding	BMT	ZA	GA	BAS	CLC	CTG	COV	DOC	DUN	EVH	GLY	IST	JAS	MGV	MNR	MON	NTS	PEC	PPB	SHG	SUR	TRN	WLB	WDG	WSP

● Not all colours available at every branch, please contact your local Stramit sales office for more details.

ABBREVIATION CODE AND COLOUR NAMES

<b>BMT</b>	Base Metal Thickness	<b>DOC</b>	Deep Ocean®	<b>NTS</b>	Night Sky®
<b>TCT</b>	Total Coated Thickness	<b>DUN</b>	Dune®	<b>PEC</b>	Pale Eucalypt®
<b>ZA</b>	ZINCALUME® steel	<b>EVH</b>	Evening Haze®	<b>PPB</b>	Paperbark®
<b>COL</b>	COLORBOND® steel	<b>GLY</b>	Gully®	<b>SHG</b>	Shale Grey™
<b>GA</b>	Galvanised	<b>IST</b>	Ironstone®	<b>SUR</b>	Surfmist®
<b>BAS</b>	Basalt®	<b>JAS</b>	Jasper®	<b>TRN</b>	Terrain®
<b>CLC</b>	Classic Cream™	<b>MGV</b>	Mangrove®	<b>WLB</b>	Wallaby®
<b>CTG</b>	Cottage Green®	<b>MNR</b>	Manor Red®	<b>WDG</b>	Woodland Grey®
<b>COV</b>	Cove®	<b>MON</b>	Monument®	<b>WSP</b>	Windspray®

NOTE: 0.48 BMT – Standard colours available on 3 week lead time. Most colours stocked. Limited quantity. Please phone for availability.



## STANDARD DELIVERY CHARGES

1. Any customer who has exceeded their Credit Limit or whose payments are overdue may experience delays in the manufacture and delivery of goods ordered.
2. Due to transport limitations the maximum length of rainwater goods is 9.0m.
3. Customers/receivers are responsible for unloading. Stramit's terms are "On lorry at site or store".
4. UNATTENDED SITES – Stramit drivers will endeavour to effect delivery as close to site as possible. In these instances Stramit will not accept claims for damage to product during unloading nor claims for pilfering of part or all of the delivery made.

### Material (product length)

TOWNSVILLE	Up to 12.600	<b>\$170</b> per delivery
	12.601 - 20.500	<b>POA</b>
	Specific site time	<b>\$125</b> extra
	Freight to store	<b>\$52.50</b>
CAIRNS	Up to 13.200	<b>\$170</b> per delivery
	13.201 - 20.500	<b>POA</b>
	Specific site time	<b>\$125</b> extra
	Freight to store	<b>\$52.50</b>

### Escort Costs

Escort charges depend on the length of product transported. POA.

### Hi-Ab Facility

Hi Ab deliveries cannot be guaranteed on all consignments.  
If a Hi Ab must be used please discuss with Stramit staff at time of order placement.  
Maximum length 12m. Lengths over 12m require a crane on site.

*(please note this facility is additional to other charges)*

### Ordering Product

**Order close off is 4.00pm daily.**

(Made to measure roofing and rainwater products will be **delivered 48 hours**).

Orders placed after 4.00pm will be considered next day orders.

Roofing orders less than 20 lineal metres. Please contact your local office.

In general orders placed on a Monday will be delivered Wednesday, Tuesday delivered Thursday etc.

### Demurrage

Unloading at customers premises or site in excess of one(1) hour will be charged at the rate of **\$110** per hour or part thereof.

### Redelivery

Product refused at the original delivery and requested to be redelivered will incur a minimum charge of **\$170** over and above the standard delivery charges.

## DELIVERY INFORMATION

### Delivery Times

Stramit anticipates delivery to be effected between the hours of 6am and 6pm Monday to Friday for product up to 12.0 mtrs in length. However customers should note that Stramit reserves the right to deliver outside these hours whenever circumstances outside our direct control occur.

Special requests for delivery outside these times will incur charges. (POA)

### Delivery Areas

Areas serviced ex works are outlined on page 8 – delivery outside these specified areas and/or off the normal route of delivery may be arranged however additional charges will apply.

### Product Return

Product that has been manufactured or purchased specifically to your requirements CANNOT be returned.

Stock line items may be returned for credit, subject to the following charges:

- i) Where goods are returned by the customer, a re-stocking fee of 20% (\$20 minimum) is applicable.
- ii) Where goods are picked up by Stramit for return, standard delivery charges plus a re-stocking fee of 20% (\$20 minimum) are applicable. **Damaged goods will not be accepted for credit.**

### Long Length Delivery

- Specific times of travel for **product in excess of 14.00m in length** do apply and will vary according to the time of year.
- **Product in excess of 14.00m** must be off the road between the hours of 7.00am - 9.00am and 4.00pm - 6.00pm and may need escorts.
- **Product in excess of 18.00m** will need escorts.
- **Product exceeding 20.00m** will require two escorts.
- QLD Legislation on long lengths may vary without notice and Stramit reserves the right to apply charges applicable to such charges.

### Customer Pick Ups

Ex works **7am to 4pm Monday to Friday**. Closed Saturdays and Sundays. Order to be placed 1 hour prior to pick-up.

COUNTRY CUSTOMERS: To arrange pick-ups by your carrier, please contact our despatch to arrange a loading time. Please phone at least **1 day before the proposed pick-up**. Where you nominate a carrier to pick-up on your behalf from our works, all charges will be to your account. If Stramit is charged by your carrier for pick-up on your behalf, without our prior agreement, such accounts or charges will be referred to you for payment by way of invoice.

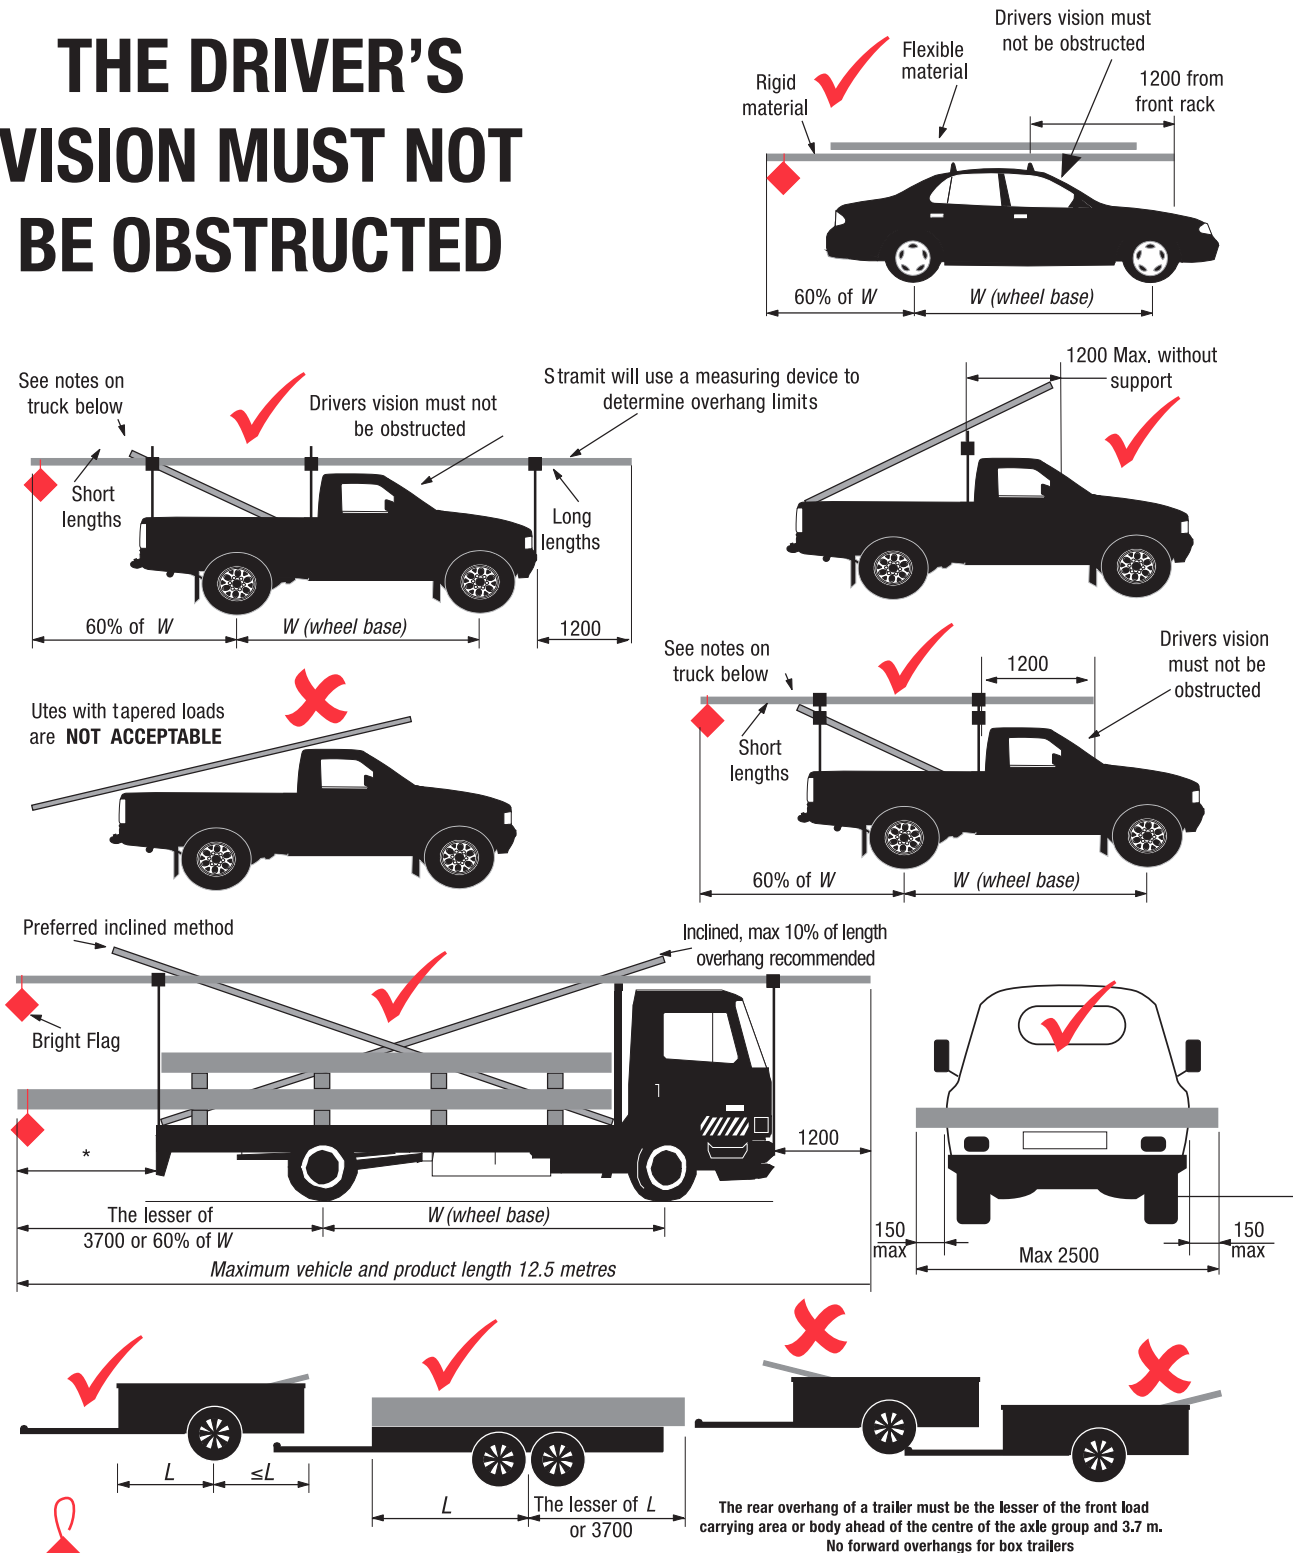
Refer to Terms and Conditions of Sale, inside back cover.

# LOADING REQUIREMENTS



## OVERHANG LIMITS

### THE DRIVER'S VISION MUST NOT BE OBSTRUCTED



A 450MM SQUARE BRIGHT RED FLAG IS REQUIRED ON ANY OVERHANG THAT CANNOT BE EASILY SEEN (MANDATORY BEYOND 1200mm)

MAXIMUM 100KG LIMIT ON ROOFRACKS UNLESS ENGINEERED OR CERTIFY

# LOADING REQUIREMENTS



## SECURE YOUR LOAD!

**DO NOT USE OCCY STRAPS OR FLEXI STRAPS**


Minimum 2 lashings per stack for items longer than 750 mm.

Recommended Minimum Lashing 1.5m apart

No low friction surfaces (metal on metal, plastic on metal, etc.)

Watch your Lashing Angle! The More Upright The More secure

Roof Racks must be secure, Maximum loads: Sports Racks - 40kg Trades Racks - 100kg



Lashing Angle

\*SEE THE TRANSPORT SAFETY GUIDELINE OWNER PICK UPS FOR FURTHER INFORMATION

**VEHICLES CONSIDERED INAPPROPRIATE CANNOT BE LOADED!**  
**YOUR SAFETY IS OUR CONCERN**

The information presented is for guidance only and compliance with applicable laws and standards remains your responsibility

**Table 1 - Lashing Requirements**

Lashing Angle to Horizontal $\angle$	25 mm hand tightened webbing	25 mm ratchet webbing	35 mm ratchet webbing	8 mm synthetic rope with single hitch
60 to 90°	52 kg per strap	170 kg	430 kg	87 kg per rope
45 to 60°	46 kg per strap	140 kg	350 kg	71 kg per rope
30 to 45°	30 kg per strap	100 kg	250 kg	50 kg per rope
15 to 30°	15 kg per strap	52 kg	130 kg	26 kg per rope

#### Key Assumptions in Tables 1

- All lashings are fully tensioned. If not, then more lashings may be required.
- No low friction surfaces (e.g. steel on steel, plastic on plastic, plastic on steel, etc.)
- A minimum static coefficient of friction of  $\mu = 0.40$  is achieved under all products and between layers of a load. (e.g. rubber or timber against steel or plastic).
- Round loads require belly wrapping and extra restraints.





**CAIRNS**  
TEL (07) 4034 6555  
FAX (07) 4034 6511

**TOWNSVILLE**  
TEL (07) 4412 3900  
FAX (07) 4412 3909

## DELIVERY SCHEDULES

### TO ORDER – TOWNSVILLE

Refer to the Distribution Schedule and order before 4.30pm the day before production day and at least 2 days before intended delivery day.

#### PRODUCTION DAYS

Product	Mon	Tues	Wed	Thur	Fri
Stramit® Monoclad® sheeting (incl. reverse roll)	•	•	•	•	•
Stramit® Corrugated sheeting	•	•	•	•	•
Stramit® Fascia Board	•	•	•	•	•
Stramit® M Pattern Gutter	•	•	•	•	•
Stramit® Fascia Capping	•	•	•	•	•
Stramit® Ceiling & Roof Battens	•	•	•	•	•
Stramit® Custom Flashings	•	•	•	•	•
Stramit® Roll Top Ridge	•	•	•	•	•
Stramit® Purlins C-Z100			•		
Stramit® Purlins C-Z150				•	
Stramit® Purlins C-Z200	•				
Stramit® Purlins C-Z250					•
Stramit® Bridging	•	•	•	•	•
Stramit® Queenslander Quad Gutter	•	•	•	•	•
Stramit® Stud, Plate, Nogging Stock 7.5m	•	•	•	•	•
Stramit® Speed Deck	•	•	•	•	•
Stramit® Longspan	•	•	•	•	•

Goods manufactured at other branches need to be ordered 48 hours before the product rolling day at the appropriate branch.

### TO ORDER – CAIRNS

Refer to the Distribution Schedule and order before 4.30pm the day before production day and at least 2 days before intended delivery day.

#### PRODUCTION DAYS

Product	Mon	Tues	Wed	Thur	Fri
Stramit® Monoclad® sheeting (incl. reverse roll)	•	•	•	•	•
Stramit® Corrugated sheeting	•	•	•	•	•
Stramit® Fascia Board	•	•	•	•	•
Stramit® M Pattern Gutter	•	•	•	•	•
Stramit® Fascia Capping	•	•	•	•	•
Stramit® Ceiling & Roof Battens	•	•	•	•	•
Stramit® Custom Flashings	•	•	•	•	•
Stramit® Roll Top Ridge	•	•	•	•	•
Stramit® Purlins C-Z100	•				
Stramit® Purlins C-Z150		•	•		
Stramit® Purlins C-Z200 or 250				•	•
Stramit® Roll Top Ridge	•	•	•	•	•
Stramit® Bridging	•	•	•	•	•
Stramit® Stud, Plate, Nogging	•	•	•	•	•
Stramit® Queenslander Quad Gutter	•	•	•	•	•

Goods manufactured at other branches need to be ordered 48 hours before the product rolling day at the appropriate branch.

### DELIVERY TERMS

On lorry on site within metropolitan area.

Delivery charge applicable to site.

Deliveries outside metropolitan area subject to inquiry.

### LONG LOADS

Lengths between 12m and 21.3m require extendable trailers and are therefore subject to traffic restrictions. Please inquire, at time of ordering, about additional costs and delivery lead times.

### WORK COVER RESTRICTIONS

Customers should be aware that under Work Cover legislation there are restrictions governing the ability of drivers to load/unload to/from heavy vehicles.

Customers with special requirements or unusual sites should contact the Transport Manager before delivery to clarify the requirements.

### REFER TO TERMS AND CONDITIONS ON INSIDE BACK COVER

If the site is considered unsafe for the delivery vehicle, the driver will inform both Stramit and the customer (where possible) for alternative arrangements to be made. If delivery was unsuccessful through no fault of Stramit Building Products, the delivery will be made on the next scheduled delivery day.

Hi-Ab unloads are from the trailer to the ground. It is unsafe for the

Hi-Ab's to be used to load product on to buildings.

### DISTRIBUTION SCHEDULE – TOWNSVILLE

Nominated Area	Route, Towns Serviced	Delivery
Townsville	Thuringowa District Charters Towers Ayr/Home Hill Ingham Cardwell	Daily Wed, Fri Mon, Wed, Fri Mon, Wed, Thur Thursdays

Deliveries outside nominated areas will incur a surcharge. (round trip).

### DISTRIBUTION SCHEDULE – CAIRNS

Nominated Area	Route, Towns Serviced	Delivery
Metropolitan Cairns	North to Mossman South to Innisfail	Daily
Table Land	Malanda to Mareeba Milla Milla, Yungaburra	Daily
Mourilyan to Tully		Monday, Wed & Friday

Deliveries outside nominated areas will incur a surcharge. (round trip).



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

## QUICK ROOFING ESTIMATE – HIPPED ROOF TAKE-OFF

The table of Roof Slope Factors below allows quick calculations of roof area, sheet length and hip length.

These methods are for quick estimating purposes only. Accurate measurements must be taken from the actual roof frame before ordering roofing and rainwater products.

As an example, take a typical hipped roof where all four roof sections have the same slope (30°) and all hips are of equal length.

### ROOF AREA

First determine the area of the roof plan by multiplying the length of the roof by the width. Before making the calculation, add gutter overhangs of 50mm. In this case, there are gutters on all four sides. To find the area of the hipped roof, simply multiply this plan area by the Roof Slope Factor for Roof Area. The same method is used for gable roofs.

$$19.1 \times 8.1 = 154.7 \times 1.155 = 178.7$$

Therefore, roughly 179m<sup>2</sup> of sheeting will be needed to cover the roof. On complex roof shapes, extra may need to be added to allow for wastage.

### SHEET LENGTH

On the roof plan, measure the distance from the line of the ridge to the outside edge of the fascia, which in the example is half the span or 4000mm. Multiply this measurement by the Sheet Length Roof Slope Factor to find the length of the sheet required to span from the ridge to the fascia. Note that all roof sheeting must extend at least 50mm beyond the fascia line to provide gutter overhang.

$$4000 + 50 \times 1.155 = 4678\text{mm}$$

### HIP CAPPING

To find the length of ridge capping required to cover one hip, measure the distance from the ridge line to the fascia on the roof plan (here 4000mm) add the gutter overhang and multiply by the Hip Length Roof Slope Factor for 30°. Multiply by 4.

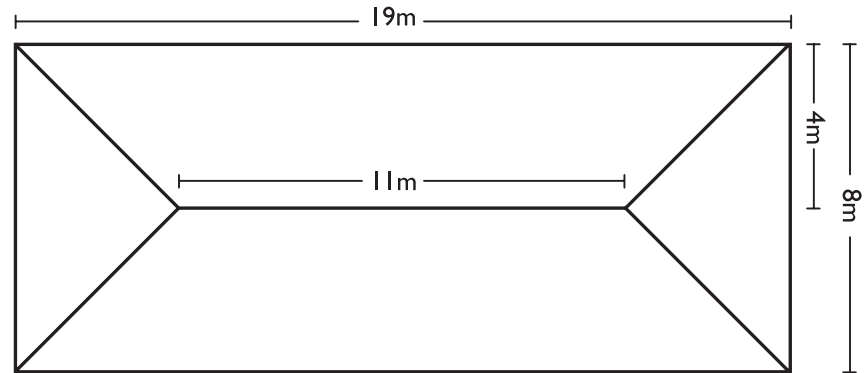
$$4000 + 50 \times 1.528 \times 4 = 24.8\text{m}$$

### RIDGE CAPPING

For hipped roofs where all sides have the same slope, the length of the top ridge is equal to the length of the roof plan minus the width, regardless of slope. Add 5% to all capping to allow for laps.

$$19 - 8 = 11 + 5\% = 11.55\text{m}$$

Typical hipped roof (roof slope = 30°)



\* Refer to the Stramit take off “Made Easy Guide” for further information

### ROOF SLOPE FACTORS

Roof Slope (degrees)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Roof Area/Sheet Length	1.000	1.001	1.001	1.002	1.004	1.006	1.008	1.010	1.012	1.015	1.019	1.022	1.026	1.031	1.035
Hip Length	1.414	1.415	1.415	1.416	1.417	1.418	1.420	1.421	1.423	1.425	1.428	1.430	1.433	1.436	1.439

Roof Slope (degrees)	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Roof Area/Sheet Length	1.040	1.046	1.051	1.058	1.064	1.071	1.079	1.086	1.095	1.103	1.113	1.122	1.133	1.143	1.155
Hip Length	1.443	1.447	1.451	1.456	1.460	1.465	1.471	1.477	1.483	1.489	1.496	1.503	1.511	1.519	1.528

Roof Slope (degrees)	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
Roof Area/Sheet Length	1.167	1.179	1.192	1.206	1.221	1.236	1.252	1.269	1.287	1.305	1.325	1.346	1.367	1.390	1.414
Hip Length	1.537	1.546	1.556	1.567	1.578	1.590	1.602	1.616	1.630	1.644	1.660	1.677	1.694	1.712	1.732






Roof Slope (degrees)	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
Roof Area/Sheet Length	1.440	1.466	1.494	1.524	1.556	1.589	1.624	1.662	1.701	1.743	1.788	1.836	1.887	1.942	2.000
Hip Length	1.753	1.775	1.798	1.823	1.849	1.877	1.907	1.939	1.973	2.010	2.049	2.091	2.136	2.184	2.236

NOTE: Orders for non-standard products and finishes are subject to inquiry.  
Stramit® Purlin orders are subject to inquiry.

## ROOFING • CLADDING • ACCESSORIES

Product Roofing/Cladding/Accessories	Product Details	BMT mm	Finish	Code	Unit
<b>Stramit® Corrugated</b> 	CTR to CTR [76.2]	0.42	ZA	<b>C42ZA</b>	per m <sup>2</sup>
		0.48		<b>C48ZA</b>	per m <sup>2</sup>
		0.42	COL	<b>C42X***</b>	per m <sup>2</sup>
		0.48		<b>C48X***</b>	per m <sup>2</sup>
		0.42	GA	<b>C42GA</b>	per m <sup>2</sup>
		0.42	SUR/CLC	<b>C42D***</b>	per m <sup>2</sup>
Minimum Length 500mm Short length surcharge (under 1m)				(ex Brisbane) <b>CUTBACKLTH</b>	per sheet
Tolerance = +0, -15mm ‡Minimum order quantities apply.					
Translucent Roof Sheeting to suit <b>Stramit® Corrugated</b> roofing 	2400gsm Fibreglass			<b>TSFGC24CLR</b>	lin metre
	3050gsm Fibreglass			<b>TSFGC30CLR</b>	lin metre
	Polycarbonate			<b>TSPCCCLR**</b>	lin metre
	Sizes: 1.8, 2.1, 2.4, 2.7, 3.0, 3.6, 4.2, 4.8, 5.4, 6.0, 8.1 Cutback available				
	Available in CLR-Clear, DKT-Dark Tint, GRY-Grey, LBZ-Light Bronze, OPL-Opal				
	Cool Lite Wonderglass Wonderglass			<b>TSWGCLC24WHI</b> <b>TSWGC24***</b>	lin metre lin metre
	32 Weather Seal Washer			<b>TSFGWW32H</b>	pack 100
<b>For fasteners refer to page 13.</b>					
<b>Fasteners</b> 	Fixing to timber				
	14 x 50 type 17 neo			<b>S1450H174</b>	per 1000
	14 x 50 type 17 neo (painted)			<b>S1450H17***4</b>	per 1000
	14 x 50 type 17 25mm Multiseal			<b>S1450H17B254</b>	per 250
	14 x 50 type 17 25mm Multiseal (painted)			<b>S1450H17B25***4</b>	per 250
	14 x 50 type 17 cyclone assembly			<b>S1450H17CA</b>	per 250
	14 x 50 type 17 cyclone assembly (painted)			<b>S1450H17CA ***</b>	per 250
	12 x 25 type 17 neo (walls only)			<b>S1225H174</b>	per 500
	Fixing to battens				
	14x55 Hex Zip Cyclone Assembly			<b>S1455HZPCA4</b>	per 250
	14x55 Hex Zip Cyclone Assembly (painted)			<b>S1455HZPCA***4</b>	per 250
	14x55 Hex Zip 25mm Multiseal			<b>S1455HZPB25</b>	per 250
	14x55 Hex Zip 25mm Multiseal (painted)			<b>S1455HZPB25***</b>	per 250
	Fixing to steel				
	<b>For fasteners fixing to steel refer to page 13</b>				
	10 x 16 Hex SDS neo (walls only)			<b>S1016HT4</b>	per 1000
	NOTE: All fasteners comply with Australian Standard AS3566 – Class 4.				
<b>Flashings</b> 	<b>Stramit® Roll Top Ridge Cap</b>				
	450mm x 6000mm	ZA		<b>RTRL40ZA60</b>	each
	450mm x 6000mm	COL		<b>RTRL40X***60</b>	each
	Cut to length	ZA		<b>RTRL40ZA</b>	lin metre
	(Available from Cairns & Townsville)	COL		<b>RTRL40X***</b>	lin metre
	<b>Stramit® Gable Roll (ex Brisbane)</b>				
	38mm x 1800mm	ZA		<b>ER38ZA18</b>	each
	38mm x 1800mm	COL		<b>ER38X***18</b>	each
	50mm x 3000mm	ZA		<b>ER50ZA30</b>	each
	50mm x 3000mm	COL		<b>ER50X***30</b>	each
<b>Accessories</b> 	Infill Strips			<b>CEFS</b>	each
	Fire Retardant			<b>CEFSFR</b>	

## CURVED ROOFING • TANK IRON • ACCESSORIES

Product	Product Details	BMT mm	Finish	Code	Unit
<b>Stramit® Curving Quality</b> 	10.5 corrugations, 762 cover	0.60	ZA	<b>CD60ZA</b>	per m <sup>2</sup>
		0.60	COL	<b>CD60X***</b>	per m <sup>2</sup>
		0.60	GA	<b>CD60GA</b>	per m <sup>2</sup>
	Short length surcharge (under 1m) Minimum Length 700mm			<b>CUTBACKLTH</b>	per sheet
	<b>If end lapping with .42 or .48 bmt sheets, we must be advised at time of ordering.</b>				
Tolerance = +0, -15mm					
<b>Flashings</b> 	Luran Plastic Curved Sections to match COLORBOND® steel				
	Barge 300, 400 & 500 radius			<b>CAPVCB***COL/ZA</b>	each
	Hip 300, 400 & 500 radius			<b>CAPVCH***COL/ZA</b>	each
	Valley 300, 400 & 500 radius 600 radius available			<b>CAPVCV***COL/ZA</b>	each
<b>Straight PVC Sections</b> (Suit each flashing above) 	Straight Ridge Capping	2600mm		<b>CAPVCSTX***26</b>	each
	(suits concave profiles to 300mm drop)				
	Straight Ridge Capping	1800mm		<b>SPEC ORDER</b>	each
	(suits concave profiles to 300mm drop)				
	Straight Valley	2400mm		<b>SPEC ORDER</b>	each
Straight Barge	2400mm		<b>SPEC ORDER</b>	each	
<b>For fasteners refer to page 10.</b>					
<b>Curving</b> 	Bullnose				
	Curving cost up to 3500mm			<b>CURV0035</b>	per curve
	Curving cost over 3500mm			<b>CURV3570</b>	per curve
	Barrel Vault				
	Curving requires a lead time of up to 5 days, please enquire when ordering.				
	NB: Standard bullnosing of corrugated sheet to 3.0m curved one end to 90°, minimum radius 500mm.				
	<b>Stramit will not accept claims for any material curved under 500mm radius.</b>				
	<b>1. Customer to supply dimensions</b>				
	A. Straight length of roof section (metres)				
	B. Straight length of wall section (metres)				
	C. Radius of curve (mm)				
	D. Angle of pitch (°)				
	E. Angle of curve (°)				
	F. Horizontal distance from wall to outside of fascia				
	<b>2. Customer to supply template</b>				
	C. Radius of curve (mm)				
	Type of template				
NOTE: Where special transport is required, transport costs will be charged as appropriate.					
<b>3. General information needed</b>					
i) No. sheets required					
ii) Topside colour or finish					
iii) Direction of laying (L to R, R to L)					
iv) Does curved sheet end lap straight sheet?					
Special Ordering Pads Available on Request.					

NOTE: Extreme caution must be exercised when End Lapping Bullnose Sheets. Sheets must be installed in the correct sequence.

## ROOFING • CLADDING • ACCESSORIES

Product Roofing/Cladding/Accessories	Product Details	BMT mm	Finish	Code	Unit
	CTR to CTR 190	0.42	ZA	<b>MC42ZA</b>	per m <sup>2</sup>
		0.48	ZA	<b>MC48ZA</b>	per m <sup>2</sup>
		0.42	COL	<b>MC42X***</b>	per m <sup>2</sup>
		0.48	COL	<b>MC48X***</b>	per m <sup>2</sup>
	Double-Sided (ex-Bris)	0.42	GA	<b>MC42GA</b>	per m <sup>2</sup>
				<b>MC42D***</b>	per m <sup>2</sup>
	Minimum Length 300mm Short length surcharge (under 1m) ‡Minimum order quantities apply.			<b>CUTBACKLTH</b>	per sheet
Tolerance = +0, -15mm					
<b>Accessories</b>					
	MC MonoLap 73mm 7.62m (10 sheets per roll)			<b>MCMONOLAP76</b>	Roll
	14x68 Hex Tek Cls4 – only suitable for MC MonoLap above (40 screws per roll – incl plate & washer)		SUR^ Plain	<b>S1268HTMCSUR4</b> <b>S1268HTMC4</b>	Pack Pack
	MC MonoLap Stop End Tool			<b>MCMONOLAPSETD</b>	EACH
	^NOTE: Other colours subject to lead time. Please contact your Stramit representative for further information.				
	Translucent Roof Sheetting to suit <b>Stramit Monoclad</b> ® roofing Available Ex Brisbane	2400gsm Fibreglass		<b>TSFGMC24CLR</b>	lin metre
		3050gsm Fibreglass		<b>TSFGMC30CLR</b>	lin metre
		Polycarbonate		<b>TSPCMCCLRXX</b>	lin metre
	Sizes: 1.8, 2.1, 2.4, 2.7, 3.0, 3.6, 4.2, 4.8, 5.4, 6.0, 8.1				
	Cutback available. Available in CLR-Clear, DKT-Dark Tint, GRY-Grey, LBZ-Light Bronze, OPL-Opal Cool Lite Wonderglass Wonderglass			<b>TSWGCLM24WHI</b> <b>TSWGMC24OPL</b>	lin metre lin metre
	32 Weather Seal Washer			<b>TSFGWW32H</b>	pack 100
For fasteners refer to page 13.					
	Fasteners	Fixing to timber			
		Refer to page 13 for Fixing to Timber screws			
	Fasteners	Fixing to steel			
		Refer to page 13 for Fixing to Steel screws			
		10 x 16 Hex SDS neo (walls only)		<b>S1016HT4</b>	per 1000
		10 x 16 Hex SDS neo (painted)		<b>S1016HT***4</b>	per 1000
NOTE: All fasteners comply with Australian Standard AS3566 – Class 4.					
	Flashings	<b>Stramit</b> ® Ridge Capping (Folded)			
		400mm	0.55	ZA	<b>RFMC55ZA</b>
		400mm	0.55	COL	<b>RFMC55X***</b>
					lin metre
		<b>Stramit</b> ® Valley Gutter (Folded)			
		400mm	0.55	ZA	<b>VPF55ZA</b>
		400mm	0.55	COL	<b>VPF55X***</b>
					lin metre
		450mm	0.55	ZA	<b>VPFL55ZA</b>
		450mm	0.55	COL	<b>VPFL55X***</b>
					lin metre
					lin metre
	Accessories	Stop end tool		<b>MCSETD</b>	each
		Non return			
	Infill Strips	Bottom		<b>MCEFSBTM</b>	each
		Top		<b>MCEFSTOP</b>	each

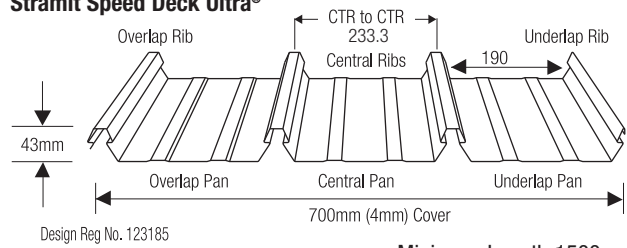
## ROOFING • CLADDING • ACCESSORIES


Product Roofing/Cladding/Accessories	Product Details	BMT mm	Finish	Code	Unit
	CTR to CTR 100	0.42	ZA	<b>LS42ZA</b>	per m <sup>2</sup>
		0.48	ZA	<b>LS48ZA</b>	per m <sup>2</sup>
		0.42	COL	<b>LS42X***</b>	per m <sup>2</sup>
		0.48	COL	<b>LS48X***</b>	per m <sup>2</sup>
	Double-Sided (ex-Bris)	0.42	GA	<b>LS42GA</b>	per m <sup>2</sup>
	Minimum Length 755mm			<b>CUTBACKLTH</b>	per sheet
Tolerance = +0, -15mm					
Note: Ex Townsville. ( Cairns lead time 4-7 working days - Larger orders may require longer )					
	Translucent Roof Sheetting to suit <b>Stramit Longspan</b> ® roofing Available Ex Brisbane	2400gsm Fibreglass		<b>TSFGLS24CLR</b>	lin metre
		3050gsm Fibreglass		<b>TSFGLS30CLR</b>	lin metre
				<b>TSFGWW32H</b>	per 100
	Fasteners for fixing Fibreglass	<b>Fibreglass Tek</b> ® M6.5-14 x 65mm Hex Hd		<b>TSFG1465WW32</b>	per box 500
	Fasteners for fixing Polycarbonate	<b>PolyZIP</b> ® M6.5-14 x 50mm Hex Hd		<b>TSPC1450DW26</b>	per box 250
	Fasteners	Fixing to timber			
		14 x 65 type 17 neo		<b>S1465H174</b>	per 1000
		14 x 65 type 17 neo (painted)		<b>S1465H17***4</b>	per 1000
		14 x 65 type 17 25mm Multiseal		<b>S1465H17B254</b>	per 250
		14 x 65 type 17 25mm Multiseal (painted)		<b>S1465H17B25***</b>	per 250
		14 x 65 type 17 cyclone assembly		<b>S1465H17CA4</b>	per 250
		14 x 65 type 17 cyclone assembly (painted)		<b>S1465H17CA***4</b>	per 250
		12 x 25 type 17 neo (walls only)		<b>S1225H174</b>	per 500
		Fixing to steel			
		14 x 53 Hex SDS neo		<b>S1453HT4</b>	per 1000
		14 x 53 Hex SDS neo (painted)		<b>S1453HT***4</b>	per 1000
		14 x 53 Hex SDS 25mm Multiseal		<b>S1453HTB25</b>	per 250
		14 x 53 Hex SDS 25mm Multiseal (painted)		<b>S1453HTB25***</b>	per 250
		14 x 53 Hex SDS Cyclone Assembly		<b>S1453HTCA4</b>	per 250
		14 x 53 Hex SDS Cyclone Assembly (painted)		<b>S1453HTCA4***4</b>	per 250
		10 x 16 Hex SDS neo (walls only)		<b>S1016HT4</b>	per 1000
		14 x 25 Hex SDS neo (painted)		<b>S1425HT***4</b>	per 500
		14 x 25 Hex SDS (No Neo)		<b>S1425HTNN</b>	per 500
NOTE: All fasteners comply with Australian Standard AS3566 – Class 4.					
	Accessories	Infill Strips		<b>LSEFSBTM</b>	each
	Available Ex Brisbane			<b>LSEFSTOP</b>	each

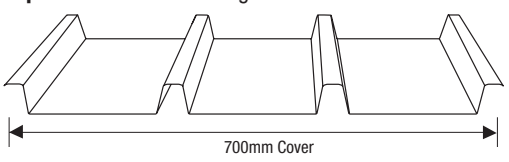
NOTE: Sheets longer than 12.0 metres will incur extra delivery charges.





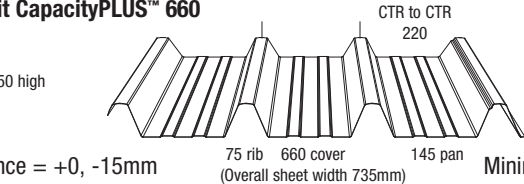
ROOFING • ACCESSORIES

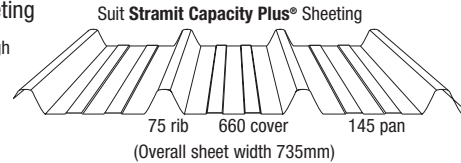
Product Roofing/Accessories	Product Details	BMT mm	Finish	Code	Unit
<b>Stramit Speed Deck Ultra®</b>  Design Reg No. 123185		0.42	ZA	<b>UD42ZA</b>	per m <sup>2</sup>
		0.42	COL	<b>UD42X***</b>	per m <sup>2</sup>
		0.48	ZA	<b>UD48ZA</b>	per m <sup>2</sup>
		0.48	COL	<b>UD48X***</b>	per m <sup>2</sup>
		0.42	GA	<b>UD42GA</b>	per m <sup>2</sup>
	Minimum Length 1500mm Short length surcharge (under 1m)			<b>CUTBACKLTH</b>	per sheet
Tolerance = +0, -15mm Note: Ex Townsville. ( Cairns lead time 4-7 working days - Larger orders may require longer ) Please refer to the <b>Stramit Speed Deck Ultra®</b> roofing brochure for full details of wind loading installation procedure etc.					

	Farlap Joint System Farlap Joint System 7m Roll Farlap Turn-Up/Turn down tool Skylap Joint Sytem		<b>UDFARLAP</b> <b>UDFARLAP70</b> <b>UDFARLAPSETD</b> <b>UDSKYLAP</b>	each each each each
--	---	--	--	------------------------------


Fibreglass Sheeting to suit <b>Stramit Speed Deck Ultra®</b> roofing		2400gsm 3050gsm	<b>TSFGUD24CLR</b> <b>TSFGUD30CLR</b>	lin metre lin metre
	NOTE: Allow 5 working days for delivery.			

Fixing Clips		Fixing Clips no fasteners (40 per box) Pre-loaded Fixing Clips (40 per box) 12 x 30 screws to suit steel purlin only <b>Guide Only</b> - Fixing Clips per m <sup>2</sup> = 1.8 Rib Stop End (end Cap)	GA GA ZA	<b>UDFC</b> <b>UDFCPL</b> <b>UDRSEZA</b>	each each each
Accessories		Stop Ending Tool (non return)  Infill Strips		<b>UDSETD</b>  <b>UDEFSBTM</b> <b>UDEFSSTOP</b>	each  each each

<b>Stramit CapacityPLUS™ 660</b> 		0.42 0.42 0.48 0.48	ZA COL ZA COL	<b>CP42ZA</b> <b>CP42X***</b> <b>CP48ZA</b> <b>CP48X***</b>	per m <sup>2</sup> per m <sup>2</sup> per m <sup>2</sup> per m <sup>2</sup>
Tolerance = +0, -15mm Minimum Length 800mm					

Fibreglass Sheeting		2400gsm 3050gsm	<b>TSFGCP24CLR</b> <b>TSFGCP240PA</b> <b>TSFGCP30CLR</b> <b>TSFGCP300PA</b>	lin metre lin metre lin metre lin metre
---------------------	---	--------------------	--	--

Fasteners Class 4 (AS35666)	14 x 95 Hex Tek Cyclone Assembly (for crest fixing to steel)	Plain	<b>S1495HTCA4</b>	per box 200
-----------------------------------	---	-------	-------------------	-------------

TANK IRON					
Product Tank Iron	Product Details	BMT mm	Finish	Code	Unit
	8 corrugations, 610 cover	0.60 0.60	AQUAPLATE® steel GA AQUAPLATE® steel COL*	<b>CT61060AQGA</b> <b>CT61060AQ***</b>	per m <sup>2</sup> per m <sup>2</sup>
	10 corrugations, 720 cover	0.60 0.60	AQUAPLATE® steel GA AQUAPLATE® steel COL#	<b>CT72060AQGA</b> <b>CT72060AQ***</b>	per m <sup>2</sup> per m <sup>2</sup>
	Short Length Surcharge		(Under 1m)	<b>CUTBACKLTH</b>	per sheet
	*8 corrugations Paperbark®, Pale Eucalypt®, Windspray®, Deep Ocean®, Surfmist®. # 10 corrugations Paperbark®, Pale Eucalypt®, Windspray®, Deep Ocean®, Surfmist®. <b>Tank Iron milled Wednesday only.</b> Minimum length 700mm				

Double Sided Flat Aqua Plate ( Base )

Flat Sheet Tank Base 1200 Aqua Plate	<b>FSTB120060AQGA</b>	lin metre
Flat Sheet Tank Base 895 Aqua Plate	<b>FSTB089560AQGA</b>	lin metre

Single Sided Flat Aqua Plate ( Lids )

Flat Sheet Tank Lid 735	AQUAPLATE® steel GA	<b>FSTL073560AQGA</b>	lin metre
Flat Sheet Tank Lid 735	AQUAPLATE® steel DOC	<b>FSTL073560AQDOC</b>	lin metre
Flat Sheet Tank Lid 735	AQUAPLATE® steel PEC	<b>FSTL073560AQPEC</b>	lin metre
Flat Sheet Tank Lid 735	AQUAPLATE® steel PPB	<b>FSTL073560AQPPB</b>	lin metre
Flat Sheet Tank Lid 735	AQUAPLATE® steel SUR	<b>FSTL073560AQSUR</b>	lin metre
Flat Sheet Tank Lid 735	AQUAPLATE® steel WSP	<b>FSTL073560AQWSP</b>	lin metre
Flat Sheet Tank Lid 895	AQUAPLATE® steel GA	<b>FSTL089560AQGA</b>	lin metre
Flat Sheet Tank Lid 895	AQUAPLATE® steel DOC	<b>FSTL089560AQDOC</b>	lin metre
Flat Sheet Tank Lid 895	AQUAPLATE® steel PEC	<b>FSTL089560AQPEC</b>	lin metre
Flat Sheet Tank Lid 895	AQUAPLATE® steel PPB	<b>FSTL089560AQPPB</b>	lin metre
Flat Sheet Tank Lid 895	AQUAPLATE® steel SUR	<b>FSTL089560AQSUR</b>	lin metre
Flat Sheet Tank Lid 895	AQUAPLATE® steel WSP	<b>FSTL089560AQWSP</b>	lin metre
Flat Sheet Tank Lid 1200	AQUAPLATE® steel GA	<b>FSTL120060AQGA</b>	lin metre
Flat Sheet Tank Lid 1200	AQUAPLATE® steel PEC	<b>FSTL120060AQPEC</b>	lin metre
Flat Sheet Tank Lid 1200	AQUAPLATE® steel PPB	<b>FSTL120060AQPPB</b>	lin metre
Flat Sheet Tank Lid 1200	AQUAPLATE® steel SUR	<b>FSTL120060AQSUR</b>	lin metre


Orders under 10 sheets at customers risk

Order must be received prior to Wednesday for Wednesday rolling.




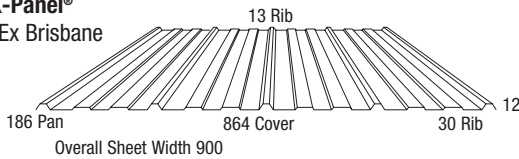



ABBREVIATION CODE

DOC	DEEP OCEAN®	PEC	PALE EUCALYPT®	PPB	PAPERBARK®	WSP	WINDSPRAY®
SUR	SURFMIST®						

Tank Strainers	Aluminium Gauze, plastic surround 385mm diameter	<b>TS</b>	each
----------------	---	-----------	------







## CLADDING • ACCESSORIES




Product Cladding/Accessories	Product Details	BMT mm	Finish	Code	Unit
<b>Stramit® C-Clad 280</b> Available Ex Brisbane	 280 Cover	0.55	ZA	<b>CC28055ZA</b>	per m <sup>2</sup>
		0.55	COL	<b>CC28055X***</b>	per m <sup>2</sup>
Available in some COLORBOND® Metallic steel & COLORBOND® Ultra steel finishes. Timber Crate required NOTE: Lead time 10 working days. Large project orders may require extended lead time. <b>Recommended max manufactured length is 6.0m. Any lengths over this at customers risk.</b> <b>Minimum Length 500mm.</b>					
<b>Stramit Premier 300™</b> Available Ex Brisbane	 Tolerance = +0, -15mm	0.55	ZA	<b>CC30055ZA</b>	per m <sup>2</sup>
		0.55	COL	<b>CC30055X***</b>	per m <sup>2</sup>
Available in some COLORBOND® Metallic steel & COLORBOND® Ultra steel finishes. Minimum Length 500mm. <b>Recommended max manufactured length is 6.0m. Any lengths over this at customers risk.</b> Lead time 7 working days. Subject to coil availability. Packing charges will apply.					
Fasteners <b>C-Clad 280 &amp; Premier 300™</b>	Starter Clip 10 x 25 Wafer Type 17 (for fixing to timber)		Plain	<b>CCSC</b> <b>S1025W17</b>	each per box 1000
	10x16 Wafer Tek (for fixing brackets to steel)			<b>S1016WT</b>	per box 1000
<b>Stramit K-Panel®</b> Available Ex Brisbane	 13 Rib 186 Pan 864 Cover 30 Rib Overall Sheet Width 900	0.35	ZA	<b>KP35ZA</b>	per m <sup>2</sup>
		0.35	COL	<b>KP35X***</b>	per m <sup>2</sup>
		0.42	ZA	<b>KP42ZA</b>	per m <sup>2</sup>
		0.42	COL	<b>KP42X***</b>	per m <sup>2</sup>
Also available in COLORBOND® steel Matt and COLORBOND® Ultra steel. NOTE: Milled Mondays & Wednesdays only <b>Maximum length manufactured is 6.0 metres.</b>					
Tolerance = +0, -15mm Minimum Length 300mm. <b>Recommended max manufactured length is 6.0m. Any lengths over this at customers risk.</b> Short length surcharge (under 1m) <b>CUTBACKLTH</b> per sheet					
<b>Stramit Minirib®</b> Available Ex Brisbane	 Overall Sheet Width 920	0.42	ZA	<b>MR42ZA</b>	per m <sup>2</sup>
		0.42	COL	<b>MR42X***</b>	per m <sup>2</sup>
Timber Crate required <b>Maximum length manufactured is 6.0 metres.</b>					
<b>Recommended max manufactured length is 6.0m. Any lengths over this at customers risk.</b> Short length surcharge (under 1m) <b>CUTBACKLTH</b> per sheet					
Tolerance = +0, -15mm Minimum Length 550mm.					
<b>Stramit Mini Corry®</b> Available Ex Sydney	 Overall Sheet Width 865	0.42	ZA	<b>MK42ZA</b>	per m <sup>2</sup>
		0.48	ZA	<b>MK48ZA</b>	per m <sup>2</sup>
		0.42	COL	<b>MK42X***</b>	per m <sup>2</sup>
		0.48	COL	<b>MK48X***</b>	per m <sup>2</sup>
Timber Crate required <b>Maximum length manufactured is 6.0 metres.</b>					
<b>Recommended max manufactured length is 6.0m. Any lengths over this at customers risk.</b> Short length surcharge (under 1m) <b>CUTBACKLTH</b> per sheet					
Tolerance = +0, -15mm					
Fasteners	10 x 25 Ripple Zips		Plain	<b>S1025HRZIP4</b>	per box 1000
		Plain		<b>S1025HRZIP4H</b>	per bag 100
		Colour		<b>S1025HRZIP***4</b>	per box 1000
		Colour		<b>S1025HRZIP***4H</b>	per bag 100
Timber Crates	Rainwater Crate - 500 wide			<b>TCRW</b>	per lin metre
	Flat Sheet Crate - 1300 wide			<b>TCFL</b>	per lin metre
	Sheeting Crate - 900 wide			<b>TCSH</b>	per lin metre
	Maximum length 6 metres				

An extra charge will apply for packing of order under 100m<sup>2</sup>. Please contact your Stramit office.

## ACOUSTIC PRODUCTS


Product Cladding/Accessories	Product Details	BMT mm	Finish	Code	Unit
<b>Stramit Monoclad®</b> 	Perforated Acoustic Pattern (SUR - Ex-Townsville) (ZA - Ex-Brisbane. Cairns & Townsville lead time 4-7 working days)	0.42	ZA	<b>MC42IAZP11</b>	per m <sup>2</sup>
		0.42	SUR	<b>MC42IOWHP11</b>	per m <sup>2</sup>
<b>Stramit® Corrugated</b> 	Perforated Acoustic Pattern (SUR - Ex-Townsville) (ZA - Ex-Brisbane. Cairns & Townsville lead time 4-7 working days) Standard perforation 11% open area	0.42	ZA	<b>C42IAZP11</b>	per m <sup>2</sup>
		0.42	SUR	<b>C42IOWHP11</b>	per m <sup>2</sup>
<b>Stramit Longspan®</b> 	Perforated Acoustic Pattern SUR Ex-Brisbane (Townsville & Cairns lead time 4-7 working days)	0.42	ZA	<b>LS42IAZP11</b>	per m <sup>2</sup>
		0.42	SUR	<b>LS42IOWHP11</b>	per m <sup>2</sup>
<b>Stramit® Premier 300</b> 	Perforated Acoustic Pattern Ex-Brisbane ( Leadtime 72 hours subject to mill capacity. Packing charges will apply )	0.55	SUR	<b>CC30055IOWHP11</b>	per m <sup>2</sup>

## NEW PRODUCT

Product	Details	Cover Width mm	Ordering Code	Finish	BMT mm	Unit
<b>Stramit SharpLine® Direct Fix</b> 	25mm Rib (short)	290	<b>SLS290D55X***</b>	COL	0.55	per m <sup>2</sup>
	38mm Rib (tall)	490	<b>SLS490D55X***</b>	COL	0.55	per m <sup>2</sup>
		265	<b>SLT265D55X***</b>	COL	0.55	per m <sup>2</sup>
		465	<b>SLT465D55X***</b>	COL	0.55	per m <sup>2</sup>
<b>Stramit SharpLine® Clip Fix</b> 	25mm Rib (short)	320	<b>SLS320C55X***</b>	COL	0.55	per m <sup>2</sup>
	38mm Rib (tall)	520	<b>SLS520C55X***</b>	COL	0.55	per m <sup>2</sup>
		285	<b>SLT285C55X***</b>	COL	0.55	per m <sup>2</sup>
		465	<b>SLT465C55X***</b>	COL	0.55	per m <sup>2</sup>
<b>Accessories suit SharpLine® Clip Fix</b> 	Clip (short) 25mm		<b>SLSCGA</b>	GA		each
	Clip (tall) 38mm		<b>SLTCGA</b>	GA		each



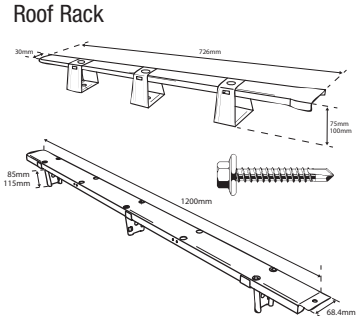
Available in COLORBOND® Metallic steel & COLORBOND® Ultra steel finishes.  
Minimum length 2000, Maximum length 9000  
NB: Lead time 72 hours.

Roof pitches below 7.5° for SharpLine® direct fix and 5.0° for SharpLine® clip fix profiles require sealed side laps. All Roof lengths above 5.0m also require sealed side laps. Refer to Product Technical manual brochure for installation requirements to plywood backing.


<b>Fasteners</b> 	10 x 16 Flathead Needle Point	<b>S1016FNP</b>	Plain	per box 1000
	10 x 16 Wafer Tek (For fixing to steel)	<b>S1016WT</b>	Plain	per box 1000
	10 x 25 Wafer Type 17 (For fixing to timber)	<b>S1025W17</b>	Plain	per box 1000



ACCESSORIES

Product Accessories	Details	Code	Finish	Unit
	General Accessories	Colour spray can	PP***	each
		Silicone Sealant (clear)	SILCLR	each
		(grey)	SILGRY	eac
		Pop Rivets	PR3275*** PR3275	per 100 per 1000
		CAUTION: Use of spray can on roofing and rainwater goods will void Stramit Warranty.		
	Roof Ventilation	Rotary Ventilators 300mm	RV300MF RV300***	Mill Finish each Colour each
		TurboBeam Skylight/Ventilator 250mm	RVTSKY250	Clear each
		Rotary Ventilator Super Flow 300	RVSF300MF RVSF300***	Mill Finish each Colour each
		Dektites®		
		Dektite 50-70	DEK2BLK	Black each
		Dektite 5-127	DEK3BLK	Black each
		Dektite 75-175	DEK4BLK	Black each
		Dektite 100-200	DEK5BLK	Black each
		Dektite 125-230	DEK6BLK	Black each
		Dektite 150-300	DEK7BLK	Black each
		Insulation Spacer SDU 75mm	RRISGA	per box 20
		Insulation Spacer SDU 100mm	RRIS100GA	per box 20
		Galv. 1 per sheet per purlin		
		Fix Roofrack to Metal Purlins 1.6 to 3.0mm	S1230HTNN	per box 1000
		Roof RazorC3 InsSpcr 115mm	RRZCIS115GA	per box 6
		Roof Razor InsSpcr 115mm	RRZIS115GA	per box 6
		Roof RazorC3 InsSpcr 85mm	RRZCISGA	per box 6
		Roof Razor InsSpcr 85mm	RRZISGA	per box 6







FASTENERS – CYCLONIC AREAS (Class 4)

Product Fasteners	Product Details	Code	Finish	Unit
Suit Stramit® Corrugated sheeting				
	14 x 50 Hex Head Type 17 Roof-Lok Ass. fixing to hardwood	S1450H17CA S1450H17CA***	Plain Colour	per box 250 per box 250
	14 x 55 Cyclonic Roofzips Roof-Lok Ass. fixing to metal battens	S1455HZPCA4 S1455HZPCA***4	Plain Colour	per box 250 per box 250
	14 X 53 Hex Head Tek Roof-Lok Ass. fixing to steel	S1453HTCA4 S1453HTCA***4	Plain Colour	per box 250 per box 250
	14 x 55mm Cyclonic Roofzips Multiseal Ass. fixing to metal battens	S1455HZPB25 S1455HZPB25***	Plain Colour	per box 250 per box 250
	14 x 53mm Hex Head Tek Multiseal Ass. fixing to steel	S1453HTB25 S1453HTB25***	Plain Colour	per box 250 per box 250

Wall fixing to suit Stramit® Corrugated, Monoclad® & Longspan®

	14 x 25 Hex Type 17 Fixing to hardwood	S1425H17 S1425H17***	Plain Colour	per box 500 per box 500
	14 x 25 Hex Tek Fixing to steel	S1425HT4 S1425HT4H S1425HT***4	Plain Plain Colour	per box 500 per bag 100 per box 500
	14 x 25 Hex Tek No Neo Fixing to steel	S1425HTNN	Plain	per box 500
	12 x 20 Hex Head Tek Fixing to Steel	S1220HT4 S1220HT***4	Plain Colour	per box 500 per box 500
	12 X 20 Hex Head Tek No Neo Fixing to steel	S1220HTNN	Plain	per box 500

## FASTENERS – CYCLONIC AREAS (Class 4)

Product Fasteners	Product Details	Code	Finish	Unit
Suit <b>Stramit Monoclad®</b> & <b>Stramit Longspan®</b> sheeting				
	14 x 65 Hex Head Type 17	<b>S1465H17CA4</b>	Plain	per box 250
	Roof-Lok Ass. fixing to hardwood (Crest fixing)	<b>S1465H17CA***4</b>	Colour	per box 250
	14 x 55 Cyclonic Roofzips	<b>S1455HZPCA4</b>	Plain	per box 250
	Roof-Lok Ass. fixing to metal battens (Crest fixing 0.55mm to 1.0mm)	<b>S1455HZPCA***4</b>	Colour	per box 250
	14 X 53 Hex Head Tek	<b>S1453HTCA4</b>	Plain	per box 250
	Roof-Lok Ass. fixing to steel (Crest fixing 1.0 to 5.0mm)	<b>S1453HTCA***4</b>	Colour	per box 250
	14 x 65 Hex Head Type 17 25mm	<b>S1465H17B254</b>	Plain	per box 250
	Multiseal Ass. fixing to hardwood (Ridge Cap Fixing)	<b>S1465H17B25***</b>	Colour	per box 250
	14 x 55mm Cyclonic Roofzips	<b>S1455HZPB25</b>	Plain	per box 250
	Multiseal Ass. fixing to metal battens (Ridge Cap Fixing 0.5 to 1.0mm)	<b>S1455HZPB25***</b>	Colour	per box 250
	14 x 53mm Hex Head Tek	<b>S1453HTB25</b>	Plain	per box 250
	Multiseal Ass. fixing to steel (Ridge Cap Fixing 1.0 to 5.0mm)	<b>S1453HTB25***</b>	Colour	per box 250




















## FASTENERS (Class 5)

Suit **Stramit Monoclad®** & **Stramit Longspan®** & **Stramit® Corrugated** sheeting

	M6 x 50 Hex Head SDS – Roof Zips	<b>S0650HZIP5</b>	Plain	per box 1000
	(Crest fixing to soft timber and steel)	<b>S0650HZIP***5</b>	Colour	per box 1000
	14 X 50 Hex Head Type 17	<b>S1450H175</b>	Plain	per box 1000
	(Crest fixing to hardwood)	<b>S1450H17***5</b>	Colour	per box 1000
	14 X 53 Hex Head Tek	<b>S1453HT5</b>	Plain	per box 1000
	Crest fixing to steel (1.0mm – 5.0mm)	<b>S1453HT***5</b>	Colour	per box 1000

- Screws available in Multiseal assembly on application
- Recommended for use with COLORBOND® Ultra steel in both Category 4 (severe marine & industrial) and Category 5 (very severe marine & industrial) corrosive environments.

## FOIL • BLANKET • WIRE












Product Foil/Blanket/Wire	Product Details	Code	Roll Area	Unit
	439/203 Light Anti-glare	<b>FLLWAG600</b>	81m <sup>2</sup>	per roll
	433/233 Medium Anti-glare	<b>FLMWAG600</b>	81m <sup>2</sup>	per roll
	453/253 Heavy Anti-glare	<b>FLHWAG600</b>	81m <sup>2</sup>	per roll
	438 Anti Glare (roof) Spot Fix	<b>FLULWAG600</b>	81m <sup>2</sup>	per roll
	Foil Tape 48mm 50.000	<b>FLTACKB</b>		box 500
	Foil Tape 72mm 50.000	<b>FLTAPE48500</b>		each
	Foil Tape 72mm 50.000	<b>FLTAPE72500</b>		each
	Foam Cell Multi Purpose (8.4mm x 1350mm x 22.25m)	<b>FLCCFM84AG2225</b>	30m <sup>2</sup>	m <sup>2</sup>
	Foam Cell Resi Liner (4.0mm x 1350mm x 22.25m)	<b>FLCCFR40AG2225</b>	30m <sup>2</sup>	m <sup>2</sup>
	Foam Cell Shed Liner (4.0mm x 1350mm x 22.25m)	<b>FLCCFS40AG2225</b>	30m <sup>2</sup>	m <sup>2</sup>
	Foam Cell Shed Liner (4.0mm x 1350mm x 33.44m)	<b>FLCCFS40AG3344</b>	45m <sup>2</sup>	m <sup>2</sup>
	Foam Cell Insulbreak 65 (6.5mm x 1350mm x 22.25m)	<b>FLCCF650AG2225</b>	30m <sup>2</sup>	m <sup>2</sup>
		<b>FLBCAG2225</b>	30m2	m <sup>2</sup>
	R1.4 1.2m x 20m (60mm thick)	<b>BB60LW200</b>	24m <sup>2</sup>	per roll
	R1,8 1.2m x 15m (75mm thick)	<b>BB75LW150</b>	18m <sup>2</sup>	per roll
	R2.5 1.2m x 10m (100mm thick)	<b>BB100LW100</b>	12m <sup>2</sup>	per roll
	R1.4 1.2m x 15m (60mm tropical)	<b>BB60TLWD150</b>	18m <sup>2</sup>	per roll
	R1.8 1.2m x 15m (75mm tropical)	<b>BB75TLWD150</b>	18m <sup>2</sup>	per roll
	Cut to length POA			
	R1.4 1.2m x 20m (55mm thick)	<b>BB55MW200</b>	24m <sup>2</sup>	per roll
	R1.8 1.2m x 15m (75mm thick)	<b>BB75MW150</b>	18m <sup>2</sup>	per roll
	R2.5 1.2m x 10m (100mm thick)	<b>BB100MW100</b>	12m <sup>2</sup>	per roll
	R1.4 1.2m x 20m (55mm thick)	<b>BB55HW200</b>	24m <sup>2</sup>	per roll
	R1.8 1.2m x 15m (75mm thick)	<b>BB75HW150</b>	18m <sup>2</sup>	per roll
	R2.5 1.2m x 10m (100mm thick)	<b>BB100HW100</b>	12m <sup>2</sup>	per roll
	Double Sided Tape 24mm x 23m	<b>FLTAPEC24230</b>		each
	Double Sided Tape 48mm x 23m	<b>FLTAPEC48230</b>		each
	300x150x2mm Safety Mesh	<b>WMAUS500</b>	90m <sup>2</sup>	per roll
	150 x 13 x 0.56 Vermin Wire	<b>WMVERMIN460</b>	46m	per roll
	C/Batt 1160 x 430 R2.5 Pk16	<b>BBC430R25</b>	8m <sup>2</sup>	per pack
	C/Batt 1160 x 430 R3.0 Pk16	<b>BBC430R30</b>	8m <sup>2</sup>	per pack
	C/Batt 1160 x 430 R3.5 Pk16	<b>BBC430R35</b>	8m <sup>2</sup>	per pack
	C/Batt 1160 x 580 R3.5 Pk10	<b>BBC580R35</b>	7m <sup>2</sup>	per pack
	Fire Stop w/Batt 1200x168 Pk10	<b>BBWFS168</b>	12lm	per pack



CAIRNS  
TEL (07) 4034 6555  
FAX (07) 4034 6511

TOWNSVILLE  
TEL (07) 4412 3900  
FAX (07) 4412 3909







FASCIA • ACCESSORIES

Product Fascia/Accessories	Product Details	Code	Finish	Unit
	Cut to length	<b>FBZA</b> <b>FBX***</b>	ZA COL	per lin metre per lin metre
	*Minimum order quantities apply.			
Accessories		<b>FBVRBGA</b>	GA	each
		<b>FBSPZA</b>	ZA	each
		<b>FBECZA</b> <b>FBECX***</b>	ZA COL	each each
		<b>FBICZA</b> <b>FBICX***</b>	ZA COL	each each
		<b>FBSCZA</b>	Coated	each
		<b>BATOC</b>		each
		<b>FBBC LZA</b> <b>FBBC LX***</b>	ZA COL	each each
		<b>FBBC RZA</b> <b>FBBC RX***</b>	ZA COL	each each
		<b>FBAJZA</b> <b>FBAJX***</b>	ZA COL	each each
Fasteners		<b>S1025W17</b>	Plain	per box 1000
		<b>S1016WT</b>		per box 1000















PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

















GUTTERS • ACCESSORIES

Product Gutters/Accessories	Product Details	Code	Finish	BMT mm	Unit
<b>Stramit® M Pattern</b> Hi Tensile G550 ECSA 7900mm <sup>2</sup> 	Cut to length*	<b>FGMSZA</b>	ZA	0.42	lin metre
		<b>FGMSX***</b>	COL	0.42	lin metre
*Minimum order quantities apply.					
Accessories					
	Gutter Bracket GPM (Box 50)	<b>FGMCBZA</b>	ZA		each
	Snap Clip for use with <b>Stramit® Fascia</b> (box 100)	<b>FBSCZA</b>	Coated		each
	Gutter Stiffener for use with Snap Clip (Box 150)	<b>FGMSBZA</b>	ZA		each
	Stop End (box 50)	<b>FGSEZA</b> <b>FGSEX***</b>	ZA COL		each each
<b>Stramit® M Pattern Barge Capping</b>					
	Cut to length*	<b>FGBCZA</b>	ZA		lin metre
		<b>FGBCX***</b>	COL		lin metre
*Minimum order quantities apply.					

## GUTTERS • ACCESSORIES







Product Gutters/Accessories	Product Details	Code	Finish	Unit
<b>Stramit® Quad 150</b> ECSA 8500mm <sup>2</sup> 	6.0m stock length	<b>QQ150ZA60</b>	ZA	length
		<b>QQ150ZA</b>	ZA	lin metre
		<b>QQ150X***</b>	COL	lin metre
	Cut to length available Ex Brisbane Minimum order required			
Accessories				
	Concealed Bracket (Box 70)	<b>QQ150CBZA</b>	ZA	each
	Gutter Stiffener for use with Snap Clip (Box 150)	<b>QQ150SBZA</b>	ZA	each
	External Bracket (T Head Bracket) (Box 50)	<b>QQ150EBGA</b>	GA	each
	Spike Bracket (Box 75)	<b>QQ150SPBZP</b> <b>QQ150SPBX***</b>	Plated COL	each each
	Overstrap Bracket	<b>QQ150OBZA</b>	ZA	each
	Overstrap	<b>QQ0SZA</b> 390 x 40mm	ZA	each
	Corners (Internal)	<b>QQ150ICGA</b> <b>QQ150ICZA</b> <b>QQ150ICX***</b>	GA ZA COL	each each each
	Corners (External)	<b>QQ150ECGA</b> <b>QQ150ECZA</b> <b>QQ150ECX***</b>	GA ZA COL	each each each
	Stop Ends (Left)	<b>QQ150SELGA</b> <b>QQ150SELZA</b> <b>QQ150SELX***</b>	GA ZA COL	each each each
	Stop Ends (Right)	<b>QQ150SERGA</b> <b>QQ150SERZA</b> <b>QQ150SERX***</b>	GA ZA COL	each each each
	Return End (Left) (Full Stop End)	<b>QQ150RELGA</b> <b>QQ150RELZA</b> <b>QQ150RELX***</b>	GA ZA COL	each each each
	(Right)	<b>QQ150RERGA</b> <b>QQ150RERZA</b> <b>QQ150RERX***</b>	GA ZA COL	each each each

## GUTTERS • ACCESSORIES

















Product Gutters/Accessories	Product Details	Code	Finish	BMT mm	Unit
<b>Stramit Queenslander Quad®</b> ECSA 7800mm <sup>2</sup> 	Cut to length Townsville* & Cairns	<b>QOSX***</b>	COL		lin metre
		<b>QQPX***</b>	COL		lin metre
		<b>QOSZA</b>	ZA		lin metre
		<b>QQPZA</b>	ZA		lin metre
	* oversize holes/slots manufactured in Townsville only. Minimum length 500, maximum length 8.5m				
Accessories					
	Concealed Bracket (box 70)	<b>QQSCBZA</b>	ZA		each
	Gutter Stiffener (for use with Snap Clip)	<b>QQSSBZA</b>	ZA		each
	Corners (Internal)	<b>QQSICZA</b> <b>QQSICX***</b>	ZA COL		each each
	Corners (External)	<b>QQSECZA</b> <b>QQSECX***</b>	ZA COL		each each
	Spike Bracket	<b>QQ175SPBZP</b> <b>QQ175SPBT***</b>	Plated Matt		each each
	Stop End Blank (Left or Right)	<b>QQSSELZA</b> <b>QQSSELX***</b> <b>QQSSERZA</b> <b>QQSSERX***</b>	ZA COL ZA COL		each each each each
	Fascia Board Gutter Spacer	<b>FBGS</b>	Coated		each
	Gutter Spacer Inserting Tool	<b>FBGST</b>	Coated		each
<b>Stramit® Quad 175</b> ECSA 14800mm <sup>2</sup> 	Ex Brisbane Cut to length	<b>QQ175GA</b> <b>QQ175ZA</b> <b>QQ175X***</b>	GA ZA COL	0.55 0.55 0.55	lin metre lin metre lin metre
Accessories					
	Spike Bracket (Box 75)	<b>QQ175SPBZP</b> <b>QQ175SPBX***</b>	Plated COL		each each
	Stiffener Bracket (Box 150)	<b>QQ175SBZA</b>	ZA		each
	Corners (Internal)	<b>QQ175ICGA</b> <b>QQ175ICZA</b> <b>QQ175ICX***</b>	GA ZA COL		each each each
	Corners (External)	<b>QQ175ECGA</b> <b>QQ175ECZA</b> <b>QQ175ECX***</b>	GA ZA COL		each each each
	Stop End Blank (Left)	<b>QQ175SELGA</b> <b>QQ175SELZA</b> <b>QQ175SELX***</b>	GA ZA COL		each each each
	Stop Ends (Right)	<b>QQ175SERGA</b> <b>QQ175SERZA</b> <b>QQ175SERX***</b>	GA ZA COL		each each each
	Brackets Concealed (Box 40)	<b>QQ175CBZA</b>	ZA		each



## HALF ROUND GUTTER & ACCESSORIES






Product Gutters/Accessories	Product Detail	Code	Unit
<b>Half Round Gutter</b> 	100	HRG100/ZA/X***	lin metre
	175	HRG175/ZA/X***	lin metre
	200	HRG200/ZA/X***	lin metre
	225	HRG225/ZA/X***	lin metre
	250	HRG250/ZA/X***	lin metre
	300	HRG300/ZA/X***	lin metre
	350	HRG350/ZA/X***	lin metre
	400	HRG400/ZA/X***	lin metre
	450	HRG450/ZA/X***	lin metre
	<b>Max Length 6.0mm</b> <b>Guage of gutter 0.55</b> <b>Also available in COLORBOND® Stainless steel, Copper, COLORBOND® Metallic steel &amp; COLORBOND® Ultra steel.</b> <b>Please contact your local Stramit representative for details.</b>		
<b>Fabricated Corners</b> to suit Half Round Gutter 	175mm 90° Ext/Int Corner	HRG175IC/EC/ZA/X***	each
	200mm 90° Ext/Int Corner	HRG200IC/EC/ZA/X***	each
	225mm 90° Ext/Int Corner	HRG225IC/EC/ZA/X***	each
	250mm 90° Ext/Int Corner	HRG250IC/EC/ZA/X***	each
	300mm 90° Ext/Int Corner	HRG300IC/EC/ZA/X***	each
	350mm 90° Ext/Int Corner	HRG350IC/EC/ZA/X***	each
	400mm 90° Ext/Int Corner	HRG400IC/EC/ZA/X***	each
	450mm 90° Ext/Int Corner	HRG450IC/EC/ZA/X***	each
<b>Stop End to suit Half Round Gutter</b> 	175mm H/Rd Stop End	HRG175SE/ZA/X***	each
	200mm H/Rd Stop End	HRG200SE/ZA/X***	each
	225mm H/Rd Stop End	HRG225SE/ZA/X***	each
	250mm H/Rd Stop End	HRG250SE/ZA/X***	each
	300mm H/Rd Stop End	HRG300SE/ZA/X***	each
	350mm H/Rd Stop End	HRG350SE/ZA/X***	each
	400mm H/Rd Stop End	HRG400SE/ZA/X***	each
	450mm H/Rd Stop End	HRG450SE/ZA/X***	each
	<b>Nozzles to suit Half Round Gutter</b> 		
	90mm H/Rd Nozzle	HRG90NOZZA/X***	each
	100mm H/Rd Nozzle	HRG100NOZZA/X***	each
	125mm H/Rd Nozzle	HRG125NOZZA/X***	each
	150mm H/Rd Nozzle	HRG150NOZZA/X/T***	each
	<b>Copper &amp; Stainless Steel made to order POA.</b> <b>Products manufactured to order are non-returnable.</b>		
<b>Half Round Brackets Type A1</b> 	100mm x 1.6mm	HRG100BA1GA/X***	each
	150mm x 1.6mm	HRG150BA1GA/X***	each
	150mm x 1.6mm	HRG150BA1SS	each
<b>Half Round Brackets Type A4 Heavy Duty Aluminium</b> (H/Duty required 200mm & over)  Strap welded to body Profile Cut 3mm 150mm-300mm 5mm 350mm +	150mm	HRG150BA4ALPR/X***	each
	175mm	HRG175BA4ALPR/X***	each
	200mm	HRG200BA4ALPR/X***	each
	225mm	HRG225BA4ALPR/X***	each
	250mm	HRG250BA4ALPR/X***	each
	300mm	HRG300BA4ALPR/X***	each
	350mm	HRG350BA4ALPR	each
	400mm	HRG400BA4ALPR	each
	450mm	HRG450BA4ALPR	each
	Setup Charge	PDCOATSU	each
	All manufactured to order. Check lead times. Powder Coating set up fee applies for under 20 brackets. Brackets other than shown POA. Other Bead Profiles available on request. Check with Sales on lead time.		
	<b>* Gutter also available in COLORBOND® Stainless steel, Copper, COLORBOND® Metallic steel &amp; COLORBOND® Ultra steel.</b> <b>ALL POWDER COATED BRACKETS ARE NOT RECOMMENDED FOR COASTAL, MARINE OR SEVERE CORROSIVE ENVIRONMENTS.</b>		

## GUTTERS • ACCESSORIES





Product Gutters/Accessories	Size	Code	Finish	Unit
<b>Stramit® Flatback Half Round Gutter</b> ECSA 7800mm <sup>2</sup> Plain 	150	HRGFB150PZA	ZA	lin metre
		HRGFB150PX***	COL	lin metre
 Slotted Ex Brisbane	150	HRGFB150SZA	ZA	lin metre
		HRGFB150SX***	COL	lin metre
<b>Accessories</b>  Universal Stop End to suit	150	HRG150SEUZA	ZA	each
	150	HRG150SEUX***	COL	each
		HRG150SEUT***	Matt	each
 Corners (Angles – Internal)	150	HRGFB150ICPZA	ZA	each
	150	HRGFB150ICPX***	COL	each
		HRG150ICPT***	Matt	each
 Corners (Angles – External)	150	HRGFB150ECPZA	ZA	each
	150	HRGFB150ECPX***	COL	each
		HRG150ECP***	Matt	each
 Stiffener Bracket	150	HRGFB150SBZA	ZA	each
 Snap Clip (100/box)		FBSCZA	Coated	each
 Flatback HR Gutter Concealed Bracket	150	HRGFB150CSBZA	ZA	each
<b>Cast Angles</b>  Cast Angles (Ext) To suit Flatback  Cast Angles (Int) To suit Flatback	150	HRGFB150CAEMF	ZA*	each
	150	HRGFB150CAEX***	COL*	each
	150	HRGFB150CAIMF	ZA*	each
	150	HRGFB150CAIX***	COL*	each
	150	HRG150CAEMF	ZA*	each
	150	HRG150CAEX***	COL*	each
	150	HRG150CAIMF	ZA*	each
	150	HRG150CAIX***	COL*	each
*surcharge applies for minimum order quantity				
<b>150mm Half Round Gutter</b> ESCA 7700mm <sup>2</sup> Plain 	150	HRGR150PZA	ZA	lin metre
		HRGR150PX***	COL	lin metre
 Slotted	150	HRGR150SZA	ZA	lin metre
	150	HRGR150SX***	COL	lin metre
<b>Accessories</b>  150mm Half Round Gutter Bracket	150	HRG150EBMF	Plain	each
	150	HRG150EBX***	COL	each
		HRG150EBT***	Matt	each
 Universal Stop End to suit Flatback and Half Round Gutter	150	HRG150SEUZA	ZA	each
	150	HRG150SEUX***	COL	each
 Corners (Angles – Internal)	150	HRG150ICPZA	ZA	each
	150	HRG150ICPX***	COL	each
 Corners (Angles – External)	150	HRG150ECPZA	ZA	each
	150	HRB150ECPX***	COL	each



## DOWNPIPE • ACCESSORIES

Product Downpipe/Accessories	Product Details	Code	Finish	BMT mm	Unit
<b>Stramit® Downpipe</b> Tapered Rectangular 	100mm x 75mm x 1800mm	<b>DP10075ZA18</b>	ZA	0.40	length
	100mm x 75mm x 2400mm	<b>DP10075ZA24</b>	ZA	0.40	length
	100mm x 75mm x 3000mm	<b>DP10075ZA30</b>	ZA	0.40	length
	100mm x 75mm x 1800mm	<b>DP10075X***18</b>	COL	0.55	length
	100mm x 75mm x 2400mm	<b>DP10075X***24</b>	COL	0.55	length
	100mm x 75mm x 3000mm	<b>DP10075X***30</b>	COL	0.55	length
	100mm x 75mm x 1800mm	<b>DP10075T***18</b>	Matt	0.55	length
	100mm x 75mm x 2400mm	<b>DP10075T***24</b>	Matt	0.55	length
	100mm x 75mm x 3000mm	<b>DP10075T***30</b>	Matt	0.55	length
	Ex Brisbane				
<b>Accessories</b>					
 	Strap Astragal 100mm x 75mm 100mm x 75mm	<b>AST10075ZA</b> <b>AST10075X***</b> <b>AST10075T***</b>	ZA COL Matt		each each each
	Nozzle/Drop 100mm x 75mm	<b>NOZ10075ZA</b>	ZA		each
<b>Half Round Nozzles</b>					
	PVC	<b>PVCHRG150NZ090</b> <b>PVCHRG150NZ100</b>	PVC PVC		each each
<b>Round Adjustable Standard Offsets</b>					
	90mm	<b>OS90ZA</b> <b>OS90X***</b>	ZA COL		each each
	100mm	<b>OS100ZA</b> <b>OS100X***</b>	ZA COL		each each
	150mm	<b>OS150ZA</b> <b>OS150X***</b>	ZA COL		each each
	Also available in stainless steel and copper.				

## DOWNPIPE • ACCESSORIES

Product Downpipe/Accessories	Product Details	Code	Finish	BMT mm	Unit
Downpipe Tapered Round 	1800mm x 90mm	<b>DP90MX***18</b>	COL	0.55	each
	1800mm x 90mm	<b>DP90MZA18</b>	ZA	0.55	each
	100mm Dia (up to 3.0m lengths)	<b>DP100MZA</b> <b>DP100MX***</b>	ZA COL	0.55 0.55	lin metre lin metre
	150mm Dia (up to 4.0m lengths)	<b>DP150MZA</b> <b>DP150MX***</b>	ZA COL	0.55 0.55	lin metre lin metre
	Also available in Stainless Steel and Copper POA				
<b>Accessories</b>					
	Strap Astragal 85mm 85mm 100mm	<b>AST85GA</b> <b>AST85ZA</b> <b>AST100ZA</b>	GA ZA ZA		each each each
	85mm 100mm	<b>AST85X***</b> <b>AST100X***</b>	COL COL		each each
	Nozzle/Drop 85mm 85mm 90mm 100mm 100mm 150mm Universal Nozzle suits 100x75 & 90 round	<b>NOZ85GA</b> <b>NOZ85ZA</b> <b>PVCNOZ90</b> <b>NOZ100GA</b> <b>NOZ100ZA</b> <b>NOZ150ZA</b> <b>NOZUNIZA</b>	GA ZA PVC GA ZA ZA ZA		each each each each each each each
	Crimp Bends ( <b>Not sealed</b> ) 85mm x 45° 85mm x 90° 100mm x 45° 100mm x 90°	<b>CB8545ZA</b> <b>CB8590ZA</b> <b>CB10045ZA</b> <b>CB10090ZA</b>	ZA ZA ZA ZA		each each each each

## PVC DOWNPIPES AND ACCESSORIES

Product Downpipe/Accessories	Product Details	Code	Unit
	PVC Downpipe 90 6.000m	<b>PVCDP9060</b>	each
	PVC Clip 90 PVC Extended Clip 90	<b>PVCCLP90</b> <b>PVCECLP90</b>	each each
	PVC Downpipe Elbow 90 22.5 Deg PVC Downpipe Elbow 90 45 Deg PVC Downpipe Elbow 90 90 Deg	<b>PVCELB9022</b> <b>PVCELB9045</b> <b>PVCELB9090</b>	each each each
	PVC Nozzle 90	<b>PVCNOZ90</b>	each
	PVC Adaptor 100 x 50 - 90 Round PVC Adaptor 100 x 80 - 90 Round	<b>PVCADP1005090</b> <b>PVCADP1008090</b>	each each

## CUSTOM FLASHINGS – ORDERING PROCEDURE

### ORDERING PROCEDURE

1. Choose the appropriate profile type, material and finish
2. If Colour, nominate the side on which colour is required
3. Nominate the dimensions by the letters shown on diagrams
4. Nominate the angles on all bends
5. Nominate the quantity and length of profile

### EXAMPLE

1. Type 4, Colour Paperbark®
2. Colour on side C
3. A – 15mm, B – 100mm, C – 150mm, D – 150mm
4. COL = 90°, CD = 90°, AB = 65°
5. 1 off, 2550mm

<b>Type 1</b> 	<b>Type 2</b> 	<b>Type 3</b> 	<b>Type 4</b> 	<b>Type 5</b> 	<b>Type 6</b> 
<b>Type 7</b> 	<b>Type 8</b> 	<b>Type 9</b> 	<b>Type 10</b> 	<b>Type 11</b> 	<b>Type 12</b> 
<b>Type 13</b> 	<b>Type 14</b> 	<b>Type 15</b> 	<b>Type 16</b> 	<b>Type 17</b> 	<b>Type 18</b> 
<b>Type 19</b> 	<b>Type 20</b> 	<b>Type 21</b> 	<b>Type 22</b> 	<b>Type 23</b> 	<b>Type 24</b> 
<b>Type 25</b> 	<b>Type 26</b> 	<b>Type 27</b> 	<b>Type 28</b> 	<b>Type 29</b> 	<b>Type 30</b> 
<b>Type 31</b> 	<b>Type 32</b> 	<b>Type 33</b> 	<b>Type 34</b> 	<b>Type 35</b> 	<b>SPECIAL</b> 

## CUSTOM FLASHINGS INFORMATION

### METRIC CONVERSION CHART

METRIC THICKNESS	EQUIVALENT GAUGE
0.4mm	26G
0.6mm	24G
0.8mm	22G
1.0mm	20G
1.2mm	18G
1.6mm	16G
2.0mm	14G
2.5mm	12G
3.0mm	10G

### NOTES

- Squash fold = 2 bends
- Minimum fold = 10mm or 15mm depending on profile
- Girth under 100mm maximum length 3600. Over 100mm maximum length 8000.

Subject to suitability of shape and delivery arrangements.  
See Delivery Details (see Page 6&7)

- Stramit® Custom Flashings have a minimum charged length of 1 linear metre - if ordering multiple lengths less than a linear metre, the charge will be for one linear metre of each flashing ordered.
- Flat sheets cannot be supplied as a "roll up"

Due to the nature of Flat Sheet, we cannot guarantee this product by normal transport without damage. Therefore, we strongly recommend that orders for Flat Sheet be collected from our factory. However, if you still require us to deliver Flat Sheet, **WE WILL NOT ACCEPT ANY RESPONSIBILITY FOR DAMAGE WHICH MAY OCCUR.** Alternatively, we can supply Flat Sheet with a Timber Pallet which will incur a surcharge.

### ORDER BY FAX

For best results, send your profile details by fax to the nearest branch.

Ask for our Stramit Flashing Detail Pad (see page 34)



**CAIRNS**  
TEL (07) 4034 6555  
FAX (07) 4034 6511

**TOWNSVILLE**  
TEL (07) 4412 3900  
FAX (07) 4412 3909

## CUSTOM FLASHINGS

### ZINCALUME® STEEL 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00ZA	CF055B01ZA	CF055B02ZA	CF055B03ZA	CF055B04ZA	CF055B05ZA	CF055B06ZA	CF055B07ZA	CF055B08ZA
101-150 (C)	CF055C00ZA	CF055C01ZA	CF055C02ZA	CF055C03ZA	CF055C04ZA	CF055C05ZA	CF055C06ZA	CF055C07ZA	CF055C08ZA
151-200 (D)	CF055D00ZA	CF055D01ZA	CF055D02ZA	CF055D03ZA	CF055D04ZA	CF055D05ZA	CF055D06ZA	CF055D07ZA	CF055D08ZA
201-250 (E)	CF055E00ZA	CF055E01ZA	CF055E02ZA	CF055E03ZA	CF055E04ZA	CF055E05ZA	CF055E06ZA	CF055E07ZA	CF055E08ZA
251-300 (F)	CF055F00ZA	CF055F01ZA	CF055F02ZA	CF055F03ZA	CF055F04ZA	CF055F05ZA	CF055F06ZA	CF055F07ZA	CF055F08ZA
301-350 (G)	CF055G00ZA	CF055G01ZA	CF055G02ZA	CF055G03ZA	CF055G04ZA	CF055G05ZA	CF055G06ZA	CF055G07ZA	CF055G08ZA
351-400 (H)	CF055H00ZA	CF055H01ZA	CF055H02ZA	CF055H03ZA	CF055H04ZA	CF055H05ZA	CF055H06ZA	CF055H07ZA	CF055H08ZA
401-500 (J)	CF055J00ZA	CF055J01ZA	CF055J02ZA	CF055J03ZA	CF055J04ZA	CF055J05ZA	CF055J06ZA	CF055J07ZA	CF055J08ZA
501-600 (L)	CF055L00ZA	CF055L01ZA	CF055L02ZA	CF055L03ZA	CF055L04ZA	CF055L05ZA	CF055L06ZA	CF055L07ZA	CF055L08ZA
601-700 (N)	CF055N00ZA	CF055N01ZA	CF055N02ZA	CF055N03ZA	CF055N04ZA	CF055N05ZA	CF055N06ZA	CF055N07ZA	CF055N08ZA
701-800 (P)	CF055P00ZA	CF055P01ZA	CF055P02ZA	CF055P03ZA	CF055P04ZA	CF055P05ZA	CF055P06ZA	CF055P07ZA	CF055P08ZA
801-900 (R)	CF055R00ZA	CF055R01ZA	CF055R02ZA	CF055R03ZA	CF055R04ZA	CF055R05ZA	CF055R06ZA	CF055R07ZA	CF055R08ZA
901-1000 (T)	CF055T00ZA	CF055T01ZA	CF055T02ZA	CF055T03ZA	CF055T04ZA	CF055T05ZA	CF055T06ZA	CF055T07ZA	CF055T08ZA
1001-1100 (V)	CF055V00ZA	CF055V01ZA	CF055V02ZA	CF055V03ZA	CF055V04ZA	CF055V05ZA	CF055V06ZA	CF055V07ZA	CF055V08ZA
1101-1200 (X)	CF055X00ZA	CF055X01ZA	CF055X02ZA	CF055X03ZA	CF055X04ZA	CF055X05ZA	CF055X06ZA	CF055X07ZA	CF055X08ZA

### GALVANISED 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00GA	CF055B01GA	CF055B02GA	CF055B03GA	CF055B04GA	CF055B05GA	CF055B06GA	CF055B07GA	CF055B08GA
101-150 (C)	CF055C00GA	CF055C01GA	CF055C02GA	CF055C03GA	CF055C04GA	CF055C05GA	CF055C06GA	CF055C07GA	CF055C08GA
151-200 (D)	CF055D00GA	CF055D01GA	CF055D02GA	CF055D03GA	CF055D04GA	CF055D05GA	CF055D06GA	CF055D07GA	CF055D08GA
201-250 (E)	CF055E00GA	CF055E01GA	CF055E02GA	CF055E03GA	CF055E04GA	CF055E05GA	CF055E06GA	CF055E07GA	CF055E08GA
251-300 (F)	CF055F00GA	CF055F01GA	CF055F02GA	CF055F03GA	CF055F04GA	CF055F05GA	CF055F06GA	CF055F07GA	CF055F08GA
301-350 (G)	CF055G00GA	CF055G01GA	CF055G02GA	CF055G03GA	CF055G04GA	CF055G05GA	CF055G06GA	CF055G07GA	CF055G08GA
351-400 (H)	CF055H00GA	CF055H01GA	CF055H02GA	CF055H03GA	CF055H04GA	CF055H05GA	CF055H06GA	CF055H07GA	CF055H08GA
401-500 (J)	CF055J00GA	CF055J01GA	CF055J02GA	CF055J03GA	CF055J04GA	CF055J05GA	CF055J06GA	CF055J07GA	CF055J08GA
501-600 (L)	CF055L00GA	CF055L01GA	CF055L02GA	CF055L03GA	CF055L04GA	CF055L05GA	CF055L06GA	CF055L07GA	CF055L08GA
601-700 (N)	CF055N00GA	CF055N01GA	CF055N02GA	CF055N03GA	CF055N04GA	CF055N05GA	CF055N06GA	CF055N07GA	CF055N08GA
701-800 (P)	CF055P00GA	CF055P01GA	CF055P02GA	CF055P03GA	CF055P04GA	CF055P05GA	CF055P06GA	CF055P07GA	CF055P08GA
801-900 (R)	CF055R00GA	CF055R01GA	CF055R02GA	CF055R03GA	CF055R04GA	CF055R05GA	CF055R06GA	CF055R07GA	CF055R08GA
901-1000 (T)	CF055T00GA	CF055T01GA	CF055T02GA	CF055T03GA	CF055T04GA	CF055T05GA	CF055T06GA	CF055T07GA	CF055T08GA
1001-1100 (V)	CF055V00GA	CF055V01GA	CF055V02GA	CF055V03GA	CF055V04GA	CF055V05GA	CF055V06GA	CF055V07GA	CF055V08GA
1101-1200 (X)	CF055X00GA	CF055X01GA	CF055X02GA	CF055X03GA	CF055X04GA	CF055X05GA	CF055X06GA	CF055X07GA	CF055X08GA

### COLORBOND® STEEL 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00X***	CF055B01X***	CF055B02X***	CF055B03X***	CF055B04X***	CF055B05X***	CF055B06X***	CF055B07X***	CF055B08X***
101-150 (C)	CF055C00X***	CF055C01X***	CF055C02X***	CF055C03X***	CF055C04X***	CF055C05X***	CF055C06X***	CF055C07X***	CF055C08X***
151-200 (D)	CF055D00X***	CF055D01X***	CF055D02X***	CF055D03X***	CF055D04X***	CF055D05X***	CF055D06X***	CF055D07X***	CF055D08X***
201-250 (E)	CF055E00X***	CF055E01X***	CF055E02X***	CF055E03X***	CF055E04X***	CF055E05X***	CF055E06X***	CF055E07X***	CF055E08X***
251-300 (F)	CF055F00X***	CF055F01X***	CF055F02X***	CF055F03X***	CF055F04X***	CF055F05X***	CF055F06X***	CF055F07X***	CF055F08X***
301-350 (G)	CF055G00X***	CF055G01X***	CF055G02X***	CF055G03X***	CF055G04X***	CF055G05X***	CF055G06X***	CF055G07X***	CF055G08X***
351-400 (H)	CF055H00X***	CF055H01X***	CF055H02X***	CF055H03X***	CF055H04X***	CF055H05X***	CF055H06X***	CF055H07X***	CF055H08X***
401-500 (J)	CF055J00X***	CF055J01X***	CF055J02X***	CF055J03X***	CF055J04X***	CF055J05X***	CF055J06X***	CF055J07X***	CF055J08X***
501-600 (L)	CF055L00X***	CF055L01X***	CF055L02X***	CF055L03X***	CF055L04X***	CF055L05X***	CF055L06X***	CF055L07X***	CF055L08X***
601-700 (N)	CF055N00X***	CF055N01X***	CF055N02X***	CF055N03X***	CF055N04X***	CF055N05X***	CF055N06X***	CF055N07X***	CF055N08X***
701-800 (P)	CF055P00X***	CF055P01X***	CF055P02X***	CF055P03X***	CF055P04X***	CF055P05X***	CF055P06X***	CF055P07X***	CF055P08X***
801-900 (R)	CF055R00X***	CF055R01X***	CF055R02X***	CF055R03X***	CF055R04X***	CF055R05X***	CF055R06X***	CF055R07X***	CF055R08X***
901-1000 (T)	CF055T00X***	CF055T01X***	CF055T02X***	CF055T03X***	CF055T04X***	CF055T05X***	CF055T06X***	CF055T07X***	CF055T08X***
1001-1100 (V)	CF055V00X***	CF055V01X***	CF055V02X***	CF055V03X***	CF055V04X***	CF055V05X***	CF055V06X***	CF055V07X***	CF055V08X***
1101-1200 (X)	CF055X00X***	CF055X01X***	CF055X02X***	CF055X03X***	CF055X04X***	CF055X05X***	CF055X06X***	CF055X07X***	CF055X08X***

NOTE: Length Tolerance is - 0 + 15mm. Please advise if flashing length is critical.  
StandardBend Tolerance is  $\pm$  2.0mm.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

## CUSTOM FLASHINGS

### ZINCALUME® STEEL 0.80 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF080B00ZA	CF080B01ZA	CF080B02ZA	CF080B03ZA	CF080B04ZA	CF080B05ZA	CF080B06ZA
101-150 (C)	CF080C00ZA	CF080C01ZA	CF080C02ZA	CF080C03ZA	CF080C04ZA	CF080C05ZA	CF080C06ZA
151-200 (D)	CF080D00ZA	CF080D01ZA	CF080D02ZA	CF080D03ZA	CF080D04ZA	CF080D05ZA	CF080D06ZA
201-250 (E)	CF080E00ZA	CF080E01ZA	CF080E02ZA	CF080E03ZA	CF080E04ZA	CF080E05ZA	CF080E06ZA
251-300 (F)	CF080F00ZA	CF080F01ZA	CF080F02ZA	CF080F03ZA	CF080F04ZA	CF080F05ZA	CF080F06ZA
301-350 (G)	CF080G00ZA	CF080G01ZA	CF080G02ZA	CF080G03ZA	CF080G04ZA	CF080G05ZA	CF080G06ZA
351-400 (H)	CF080H00ZA	CF080H01ZA	CF080H02ZA	CF080H03ZA	CF080H04ZA	CF080H05ZA	CF080H06ZA
401-500 (J)	CF080J00ZA	CF080J01ZA	CF080J02ZA	CF080J03ZA	CF080J04ZA	CF080J05ZA	CF080J06ZA
501-600 (L)	CF080L00ZA	CF080L01ZA	CF080L02ZA	CF080L03ZA	CF080L04ZA	CF080L05ZA	CF080L06ZA
601-700 (N)	CF080N00ZA	CF080N01ZA	CF080N02ZA	CF080N03ZA	CF080N04ZA	CF080N05ZA	CF080N06ZA
701-800 (P)	CF080P00ZA	CF080P01ZA	CF080P02ZA	CF080P03ZA	CF080P04ZA	CF080P05ZA	CF080P06ZA
801-900 (R)	CF080R00ZA	CF080R01ZA	CF080R02ZA	CF080R03ZA	CF080R04ZA	CF080R05ZA	CF080R06ZA
901-1000 (T)	CF080T00ZA	CF080T01ZA	CF080T02ZA	CF080T03ZA	CF080T04ZA	CF080T05ZA	CF080T06ZA
1001-1100 (V)	CF080V00ZA	CF080V01ZA	CF080V02ZA	CF080V03ZA	CF080V04ZA	CF080V05ZA	CF080V06ZA
1101-1200 (X)	CF080X00ZA	CF080X01ZA	CF080X02ZA	CF080X03ZA	CF080X04ZA	CF080X05ZA	CF080X06ZA

### GALVANISED 0.75 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF075B00GA	CF075B01GA	CF075B02GA	CF075B03GA	CF075B04GA	CF075B05GA	CF075B06GA
101-150 (C)	CF075C00GA	CF075C01GA	CF075C02GA	CF075C03GA	CF075C04GA	CF075C05GA	CF075C06GA
151-200 (D)	CF075D00GA	CF075D01GA	CF075D02GA	CF075D03GA	CF075D04GA	CF075D05GA	CF075D06GA
201-250 (E)	CF075E00GA	CF075E01GA	CF075E02GA	CF075E03GA	CF075E04GA	CF075E05GA	CF075E06GA
251-300 (F)	CF075F00GA	CF075F01GA	CF075F02GA	CF075F03GA	CF075F04GA	CF075F05GA	CF075F06GA
301-350 (G)	CF075G00GA	CF075G01GA	CF075G02GA	CF075G03GA	CF075G04GA	CF075G05GA	CF075G06GA
351-400 (H)	CF075H00GA	CF075H01GA	CF075H02GA	CF075H03GA	CF075H04GA	CF075H05GA	CF075H06GA
401-500 (J)	CF075J00GA	CF075J01GA	CF075J02GA	CF075J03GA	CF075J04GA	CF075J05GA	CF075J06GA
501-600 (L)	CF075L00GA	CF075L01GA	CF075L02GA	CF075L03GA	CF075L04GA	CF075L05GA	CF075L06GA
601-700 (N)	CF075N00GA	CF075N01GA	CF075N02GA	CF075N03GA	CF075N04GA	CF075N05GA	CF075N06GA
701-800 (P)	CF075P00GA	CF075P01GA	CF075P02GA	CF075P03GA	CF075P04GA	CF075P05GA	CF075P06GA
801-900 (R)	CF075R00GA	CF075R01GA	CF075R02GA	CF075R03GA	CF075R04GA	CF075R05GA	CF075R06GA
901-1000 (T)	CF075T00GA	CF075T01GA	CF075T02GA	CF075T03GA	CF075T04GA	CF075T05GA	CF075T06GA
1001-1100 (V)	CF075V00GA	CF075V01GA	CF075V02GA	CF075V03GA	CF075V04GA	CF075V05GA	CF075V06GA
1101-1200 (X)	CF075X00GA	CF075X01GA	CF075X02GA	CF075X03GA	CF075X04GA	CF075X05GA	CF075X06GA

NOTE: Length Tolerance is - 0 + 15mm. Please advise if flashing length is critical.  
StandardBend Tolerance is  $\pm$  2.0mm.



**CAIRNS**  
TEL (07) 4034 6555  
FAX (07) 4034 6511

**TOWNSVILLE**  
TEL (07) 4412 3900  
FAX (07) 4412 3909

## CUSTOM FLASHINGS

### ZINCALUME® STEEL 1.00 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF100B00ZA	CF100B01ZA	CF100B02ZA	CF100B03ZA	CF100B04ZA	CF100B05ZA	CF100B06ZA
101-150 (C)	CF100C00ZA	CF100C01ZA	CF100C02ZA	CF100C03ZA	CF100C04ZA	CF100C05ZA	CF100C06ZA
151-200 (D)	CF100D00ZA	CF100D01ZA	CF100D02ZA	CF100D03ZA	CF100D04ZA	CF100D05ZA	CF100D06ZA
201-250 (E)	CF100E00ZA	CF100E01ZA	CF100E02ZA	CF100E03ZA	CF100E04ZA	CF100E05ZA	CF100E06ZA
251-300 (F)	CF100F00ZA	CF100F01ZA	CF100F02ZA	CF100F03ZA	CF100F04ZA	CF100F05ZA	CF100F06ZA
301-350 (G)	CF100G00ZA	CF100G01ZA	CF100G02ZA	CF100G03ZA	CF100G04ZA	CF100G05ZA	CF100G06ZA
351-400 (H)	CF100H00ZA	CF100H01ZA	CF100H02ZA	CF100H03ZA	CF100H04ZA	CF100H05ZA	CF100H06ZA
401-500 (J)	CF100J00ZA	CF100J01ZA	CF100J02ZA	CF100J03ZA	CF100J04ZA	CF100J05ZA	CF100J06ZA
501-600 (L)	CF100L00ZA	CF100L01ZA	CF100L02ZA	CF100L03ZA	CF100L04ZA	CF100L05ZA	CF100L06ZA
601-700 (N)	CF100N00ZA	CF100N01ZA	CF100N02ZA	CF100N03ZA	CF100N04ZA	CF100N05ZA	CF100N06ZA
701-800 (P)	CF100P00ZA	CF100P01ZA	CF100P02ZA	CF100P03ZA	CF100P04ZA	CF100P05ZA	CF100P06ZA
801-900 (R)	CF100R00ZA	CF100R01ZA	CF100R02ZA	CF100R03ZA	CF100R04ZA	CF100R05ZA	CF100R06ZA
901-1000 (T)	CF100T00ZA	CF100T01ZA	CF100T02ZA	CF100T03ZA	CF100T04ZA	CF100T05ZA	CF100T06ZA
1001-1100 (V)	CF100V00ZA	CF100V01ZA	CF100V02ZA	CF100V03ZA	CF100V04ZA	CF100V05ZA	CF100V06ZA
1101-1200 (X)	CF100X00ZA	CF100X01ZA	CF100X02ZA	CF100X03ZA	CF100X04ZA	CF100X05ZA	CF100X06ZA

### GALVANISED 0.95 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF095B00GA	CF095B01GA	CF095B02GA	CF095B03GA	CF095B04GA	CF095B05GA	CF095B06GA
101-150 (C)	CF095C00GA	CF095C01GA	CF095C02GA	CF095C03GA	CF095C04GA	CF095C05GA	CF095C06GA
151-200 (D)	CF095D00GA	CF095D01GA	CF095D02GA	CF095D03GA	CF095D04GA	CF095D05GA	CF095D06GA
201-250 (E)	CF095E00GA	CF095E01GA	CF095E02GA	CF095E03GA	CF095E04GA	CF095E05GA	CF095E06GA
251-300 (F)	CF095F00GA	CF095F01GA	CF095F02GA	CF095F03GA	CF095F04GA	CF095F05GA	CF095F06GA
301-350 (G)	CF095G00GA	CF095G01GA	CF095G02GA	CF095G03GA	CF095G04GA	CF095G05GA	CF095G06GA
351-400 (H)	CF095H00GA	CF095H01GA	CF095H02GA	CF095H03GA	CF095H04GA	CF095H05GA	CF095H06GA
401-500 (J)	CF095J00GA	CF095J01GA	CF095J02GA	CF095J03GA	CF095J04GA	CF095J05GA	CF095J06GA
501-600 (L)	CF095L00GA	CF095L01GA	CF095L02GA	CF095L03GA	CF095L04GA	CF095L05GA	CF095L06GA
601-700 (N)	CF095N00GA	CF095N01GA	CF095N02GA	CF095N03GA	CF095N04GA	CF095N05GA	CF095N06GA
701-800 (P)	CF095P00GA	CF095P01GA	CF095P02GA	CF095P03GA	CF095P04GA	CF095P05GA	CF095P06GA
801-900 (R)	CF095R00GA	CF095R01GA	CF095R02GA	CF095R03GA	CF095R04GA	CF095R05GA	CF095R06GA
901-1000 (T)	CF095T00GA	CF095T01GA	CF095T02GA	CF095T03GA	CF095T04GA	CF095T05GA	CF095T06GA
1001-1100 (V)	CF095V00GA	CF095V01GA	CF095V02GA	CF095V03GA	CF095V04GA	CF095V05GA	CF095V06GA
1101-1200 (X)	CF095X00GA	CF095X01GA	CF095X02GA	CF095X03GA	CF095X04GA	CF095X05GA	CF095X06GA

NOTE: Length Tolerance is - 0 + 15mm. Please advise if flashing length is critical.  
StandardBend Tolerance is ± 2.0mm.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

## CUSTOM FLASHINGS

### ZINCALUME® STEEL 1.20 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF120B00ZA	CF120B01ZA	CF120B02ZA	CF120B03ZA	CF120B04ZA	CF120B05ZA	CF120B06ZA
101-150 (C)	CF120C00ZA	CF120C01ZA	CF120C02ZA	CF120C03ZA	CF120C04ZA	CF120C05ZA	CF120C06ZA
151-200 (D)	CF120D00ZA	CF120D01ZA	CF120D02ZA	CF120D03ZA	CF120D04ZA	CF120D05ZA	CF120D06ZA
201-250 (E)	CF120E00ZA	CF120E01ZA	CF120E02ZA	CF120E03ZA	CF120E04ZA	CF120E05ZA	CF120E06ZA
251-300 (F)	CF120F00ZA	CF120F01ZA	CF120F02ZA	CF120F03ZA	CF120F04ZA	CF120F05ZA	CF120F06ZA
301-350 (G)	CF120G00ZA	CF120G01ZA	CF120G02ZA	CF120G03ZA	CF120G04ZA	CF120G05ZA	CF120G06ZA
351-400 (H)	CF120H00ZA	CF120H01ZA	CF120H02ZA	CF120H03ZA	CF120H04ZA	CF120H05ZA	CF120H06ZA
401-500 (J)	CF120J00ZA	CF120J01ZA	CF120J02ZA	CF120J03ZA	CF120J04ZA	CF120J05ZA	CF120J06ZA
501-600 (L)	CF120L00ZA	CF120L01ZA	CF120L02ZA	CF120L03ZA	CF120L04ZA	CF120L05ZA	CF120L06ZA
601-700 (N)	CF120N00ZA	CF120N01ZA	CF120N02ZA	CF120N03ZA	CF120N04ZA	CF120N05ZA	CF120N06ZA
701-800 (P)	CF120P00ZA	CF120P01ZA	CF120P02ZA	CF120P03ZA	CF120P04ZA	CF120P05ZA	CF120P06ZA
801-900 (R)	CF120R00ZA	CF120R01ZA	CF120R02ZA	CF120R03ZA	CF120R04ZA	CF120R05ZA	CF120R06ZA
901-1000 (T)	CF120T00ZA	CF120T01ZA	CF120T02ZA	CF120T03ZA	CF120T04ZA	CF120T05ZA	CF120T06ZA
1001-1100 (V)	CF120V00ZA	CF120V01ZA	CF120V02ZA	CF120V03ZA	CF120V04ZA	CF120V05ZA	CF120V06ZA
1101-1200 (X)	CF120X00ZA	CF120X01ZA	CF120X02ZA	CF120X03ZA	CF120X04ZA	CF120X05ZA	CF120X06ZA

### GALVANISED 1.15 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF115B00GA	CF115B01GA	CF115B02GA	CF115B03GA	CF115B04GA	CF115B05GA	CF115B06GA
101-150 (C)	CF115C00GA	CF115C01GA	CF115C02GA	CF115C03GA	CF115C04GA	CF115C05GA	CF115C06GA
151-200 (D)	CF115D00GA	CF115D01GA	CF115D02GA	CF115D03GA	CF115D04GA	CF115D05GA	CF115D06GA
201-250 (E)	CF115E00GA	CF115E01GA	CF115E02GA	CF115E03GA	CF115E04GA	CF115E05GA	CF115E06GA
251-300 (F)	CF115F00GA	CF115F01GA	CF115F02GA	CF115F03GA	CF115F04GA	CF115F05GA	CF115F06GA
301-350 (G)	CF115G00GA	CF115G01GA	CF115G02GA	CF115G03GA	CF115G04GA	CF115G05GA	CF115G06GA
351-400 (H)	CF115H00GA	CF115H01GA	CF115H02GA	CF115H03GA	CF115H04GA	CF115H05GA	CF115H06GA
401-500 (J)	CF115J00GA	CF115J01GA	CF115J02GA	CF115J03GA	CF115J04GA	CF115J05GA	CF115J06GA
501-600 (L)	CF115L00GA	CF115L01GA	CF115L02GA	CF115L03GA	CF115L04GA	CF115L05GA	CF115L06GA
601-700 (N)	CF115N00GA	CF115N01GA	CF115N02GA	CF115N03GA	CF115N04GA	CF115N05GA	CF115N06GA
701-800 (P)	CF115P00GA	CF115P01GA	CF115P02GA	CF115P03GA	CF115P04GA	CF115P05GA	CF115P06GA
801-900 (R)	CF115R00GA	CF115R01GA	CF115R02GA	CF115R03GA	CF115R04GA	CF115R05GA	CF115R06GA
901-1000 (T)	CF115T00GA	CF115T01GA	CF115T02GA	CF115T03GA	CF115T04GA	CF115T05GA	CF115T06GA
1001-1100 (V)	CF115V00GA	CF115V01GA	CF115V02GA	CF115V03GA	CF115V04GA	CF115V05GA	CF115V06GA
1101-1200 (X)	CF115X00GA	CF115X01GA	CF115X02GA	CF115X03GA	CF115X04GA	CF115X05GA	CF115X06GA

### GALVANISED 1.55 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF155B00GA	CF155B01GA	CF155B02GA	CF155B03GA	CF155B04GA	CF155B05GA	CF155B06GA
101-150 (C)	CF155C00GA	CF155C01GA	CF155C02GA	CF155C03GA	CF155C04GA	CF155C05GA	CF155C06GA
151-200 (D)	CF155D00GA	CF155D01GA	CF155D02GA	CF155D03GA	CF155D04GA	CF155D05GA	CF155D06GA
201-250 (E)	CF155E00GA	CF155E01GA	CF155E02GA	CF155E03GA	CF155E04GA	CF155E05GA	CF155E06GA
251-300 (F)	CF155F00GA	CF155F01GA	CF155F02GA	CF155F03GA	CF155F04GA	CF155F05GA	CF155F06GA
301-350 (G)	CF155G00GA	CF155G01GA	CF155G02GA	CF155G03GA	CF155G04GA	CF155G05GA	CF155G06GA
351-400 (H)	CF155H00GA	CF155H01GA	CF155H02GA	CF155H03GA	CF155H04GA	CF155H05GA	CF155H06GA
401-500 (J)	CF155J00GA	CF155J01GA	CF155J02GA	CF155J03GA	CF155J04GA	CF155J05GA	CF155J06GA
501-600 (L)	CF155L00GA	CF155L01GA	CF155L02GA	CF155L03GA	CF155L04GA	CF155L05GA	CF155L06GA
601-700 (N)	CF155N00GA	CF155N01GA	CF155N02GA	CF155N03GA	CF155N04GA	CF155N05GA	CF155N06GA
701-800 (P)	CF155P00GA	CF155P01GA	CF155P02GA	CF155P03GA	CF155P04GA	CF155P05GA	CF155P06GA
801-900 (R)	CF155R00GA	CF155R01GA	CF155R02GA	CF155R03GA	CF155R04GA	CF155R05GA	CF155R06GA
901-1000 (T)	CF155T00GA	CF155T01GA	CF155T02GA	CF155T03GA	CF155T04GA	CF155T05GA	CF155T06GA
1001-1100 (V)	CF155V00GA	CF155V01GA	CF155V02GA	CF155V03GA	CF155V04GA	CF155V05GA	CF155V06GA
1101-1200 (X)	CF155X00GA	CF155X01GA	CF155X02GA	CF155X03GA	CF155X04GA	CF155X05GA	CF155X06GA

NOTE: Length Tolerance is - 0 + 15mm. Please advise if flashing length is critical.  
StandardBend Tolerance is ± 2.0mm.





CAIRNS  
TEL (07) 4034 6555  
FAX (07) 4034 6511

TOWNSVILLE  
TEL (07) 4412 3900  
FAX (07) 4412 3909



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

CUSTOMER ORDER – FLASHING DETAIL SHEET

Customer Code  
OFFICE USE ONLY

Order Number:

Caller's Name:

Your Name:

Date Required:

Customer:

Branch:

Telephone No:

Today's Date

Time Taken:

Value:

S.O. No:

Inv. No:

Special Instructions (manufacturing/Packing Instructions)

Suburb:

Site Time:

Delivery Address:

Truck No:

Product Code

Girth Bends

Length

Qty

Price/Discount

Description Colour

Product Code

Girth Bends

Length

Qty

Price/Discount

Description Colour

Product Code

Girth Bends

Length

Qty

Price/Discount

Description Colour

PHOTOCOPY FOR OWN USE

FREIGHT CODE

FR: - SITE / STORE / N-STD \$

Authorised by:

PRODUCT AVAILABILITY – COLORBOND® STEEL MATT, COLORBOND® ULTRA STEEL & COLORBOND® METALLIC STEEL

Product/Roofing/Cladding	BMT	DUN	MON	SUR	WDG	WLB	WSP	ARI	AST	CEL	COS	GLT	RHE	BAS	MON	SUR
Stramit Monoclad®	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
	0.48	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Stramit® Corrugated	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
	0.48	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Stramit® Speed Deck	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
	0.48	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Stramit Longspan®	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
	0.48	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Stramit Minirib®	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit K-Panel®	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit Mini Corry®	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit Mini Corry®	0.48	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Stramit® Premier 300	0.55	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Fascia	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit® Valley Folded	0.55	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit Roll Top Ridge 400	0.40	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit® Edge Roll 50mm 2m	0.40	✓	✓	✓	✓	✓	✓									
Stramit® Roll Barge Cap	0.40	✓	✓	✓	✓	✓	✓									
Stramit® QLD Slotted Quad	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit® QLD Quad 175 (Gutter Only No Stop Ends )	0.55	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Quad 150	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit® Compact Gutter	0.42	✓	✓	✓	✓	✓	✓									
Stramit® Downpipe 100 X 75	0.55	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit® Downpipe 85 / 100	0.55	✓	✓	✓	✓	✓	✓									
Product/Roofing/Cladding	BMT	COLORBOND® ULTRA STEEL						COLORBOND® METALLIC STEEL						COLORBOND® STEEL MATT		

● All premium products are Ex Brisbane, please contact your local Stramit office for more information.

COLOUR AVAILABILITY							
COLORBOND® ULTRA STEEL		COLORBOND® STAINLESS STEEL		COLORBOND® METALLIC STEEL		COLORBOND® STEEL MATT	
DUN	DUNE®	DOC	DEEP OCEAN®	ARI	ARIES®	BAS	BASALT® MATT
MON	MONUMENT®	DUN	DUNE®	AST	ASTRO®	MON	MONUMENT® MATT
SUR	SURFMIST®	SUR	SURFMIST®	CEL	CELESTIAN®	SUR	SURMIST® MATT
WDG	WOODLAND GREY®	WSP	WINDSPRAY®	COS	COSMIC®		
WLB	WALLABY®			GLT	GALACTIC®		
WSP	WINDSPRAY®			RHE	RHEA®		



# Colorbond®

COLORBOND® steel is more than a world-class building product. It’s an iconic brand that’s helped the people of our building industry shape the very landscape in which we live.

### MADE FOR AUSTRALIAN CONDITIONS

Australia is battered by our relentless climate every day. Today’s COLORBOND® steel is the result of over 5 decades of research, development and innovation, based on over 50 years of data from thousands of steel samples.

### TRIED AND TESTED FOR THE AUSTRALIAN ENVIRONMENT

For roofing and walling close to water, COLORBOND® Ultra steel has been designed to provide enhanced corrosion protection, while the iconic COLORBOND® steel range of 22 colours is ideal for most building designs in most locations. Regardless of where you build, there’s likely to be a COLORBOND® steel solution for you.

### COOLER IN THE SUMMER HEAT

COLORBOND® steel colours incorporate Thermatech® solar reflectance technology<sup>1</sup>, which can mean reduced reliance on air-conditioning and less heat stress on a roof. For commercial roofing applications, COLORBOND® Coolmax® steel provides BlueScope’s highest solar reflectance product, which may help to reduce roofing temperatures and keep buildings cooler<sup>2</sup>.

### FIVE LAYERS OF PROTECTION

Manufactured in Australia to relevant Australian Standards (AS 1397-2011 and AS/NZS 2728:2013) and tested in some of the harshest Australian conditions, COLORBOND® steel is far more than just ‘paint on steel’.

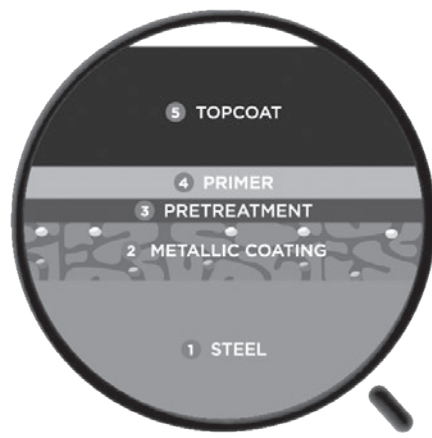
1. The steel base meets relevant Australian Standards, ensuring strict adherence to the required grade and strength.

2. The base is then coated in BlueScope’s industry leading metallic coating incorporating Activate® technology<sup>4</sup>, to provide enhanced corrosion resistance.

3. A thin pre-treatment layer is applied to optimise the adhesion of further coatings.

4. A corrosion inhibitive primer is baked onto the surface.

5. A topcoat of specially developed, exterior grade paint is baked on to provide resistance to chipping, flaking and blistering and to ensure the finish retains its look for longer.



### PEACE OF MIND FOR YOU AND YOUR CUSTOMERS

COLORBOND® steel for roofing is warranted for corrosion to perforation for up to 36 years, as well as paint flake and peel for up to 20 years<sup>3</sup>. Detailed information can be accessed at [bluescopesteel.com.au/warranties](http://bluescopesteel.com.au/warranties).

### NATIONWIDE SUPPORT

BlueScope’s nationwide network of sales and technical support helps provide advice and information for customers, architects, designers, engineers, builders, trades and homeowners who use COLORBOND® steel.




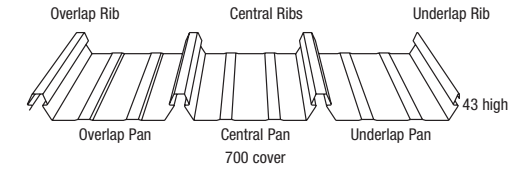

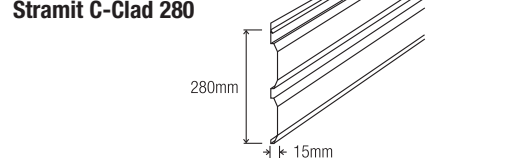

1. Thermatech® technology is not available in Night Sky®, or non-standard colours, and is not available in COLORBOND® Stainless steel, COLORBOND® Metallic steel, or COLORBOND® Coolmax® steel. Results will depend on roof colour, level and location of insulation, type and location of building shape and function.

2. Compared to conventional roofing materials of lower solar reflectance index (SRI), such as ZINCALUME® steel and all other roofing materials in the COLORBOND® steel range. Any savings and or the extent to which a building is cooler may vary and depend upon the particular circumstances of your building, including building location, level of insulation, location of air-conditioning when installed, building shape, building function and environmental factors. For further information refer to Stockland case study <http://steel.com.au/colorbond-coolmax-steel>.

3. Warranties are subject to exclusions, application and eligibility criteria. For full terms and conditions and to determine the eligibility of your product for the warranty visit [bluescopesteel.com.au/warranties](http://bluescopesteel.com.au/warranties) or contact BlueScope on 1800 064 384.

4. Aluminium/zinc/magnesium alloy-coated steel substrate incorporating Activate® technology is not available for COLORBOND® Stainless steel, and COLORBOND® steel products with a galvanised steel substrate.

## PREMIUM PRODUCTS • ROOFING • CLADDING



Product Roofing/Cladding/Accessories	Product Details	BMT mm	Finish	Code	Unit
<b>Stramit® Corrugated</b> 		0.42	Coolmax®	<b>C42KWHN</b>	per m <sup>2</sup>
		0.42	Ultra	<b>C42U***</b>	per m <sup>2</sup>
		0.42	Stainless	<b>C42SSUR</b>	per m <sup>2</sup>
		0.42	Matt	<b>C42T***</b>	per m <sup>2</sup>
		0.48	Coolmax®	<b>C48KWHN</b>	per m <sup>2</sup>
		0.48	Ultra	<b>C48U***</b>	per m <sup>2</sup>
		0.48	Metallic	<b>C48M***</b>	per m <sup>2</sup>
<b>Stramit Monoclad®</b> 		0.42	Coolmax®	<b>MC42KWHN</b>	per m <sup>2</sup>
		0.42	Ultra	<b>MC42U***</b>	per m <sup>2</sup>
		0.42	Stainless	<b>MC42SSUR</b>	per m <sup>2</sup>
		0.42	Matt	<b>MC42T***</b>	per m <sup>2</sup>
		0.48	Coolmax®	<b>MC48KWHN</b>	per m <sup>2</sup>
		0.48	Ultra	<b>MC48U***</b>	per m <sup>2</sup>
		0.48	Metallic	<b>MC48M***</b>	per m <sup>2</sup>
<b>Longspan®</b> 		0.42	Coolmax®	<b>LS42KWHN</b>	per m <sup>2</sup>
		0.42	Ultra	<b>LS42U***</b>	per m <sup>2</sup>
		0.42	Stainless	<b>LS42SSUR</b>	per m <sup>2</sup>
		0.42	Matt	<b>LS42T***</b>	per m <sup>2</sup>
		0.48	Coolmax®	<b>LS48KWHN</b>	per m <sup>2</sup>
		0.48	Ultra	<b>LS48U***</b>	per m <sup>2</sup>
		0.48	Metallic	<b>LS48M***</b>	per m <sup>2</sup>
<b>Stramit Speed Deck Ultra®</b> 		0.42	Coolmax®	<b>UD42KWHN</b>	per m <sup>2</sup>
		0.42	Ultra	<b>UD42U***</b>	per m <sup>2</sup>
		0.42	Matt	<b>UD42T ***</b>	per m <sup>2</sup>
		0.48	Coolmax®	<b>UD48KWHN</b>	per m <sup>2</sup>
		0.48	Ultra	<b>UD48U***</b>	per m <sup>2</sup>
		0.48	Metallic	<b>UD48M***</b>	per m <sup>2</sup>
	Fixing Clips POA				
<b>Stramit Mini Corry® ex Sydney</b> 		0.42	Ultra	<b>MK42U***</b>	per m <sup>2</sup>
		0.42	Matt	<b>MK42T***</b>	per m <sup>2</sup>
		0.48	Ultra	<b>MK48U***</b>	per m <sup>2</sup>
		0.48	Metallic	<b>MK48M***</b>	per m <sup>2</sup>
	Note: Also available in Stramit Minirib				
<b>Stramit C-Clad 280</b> 		0.55	Ultra	<b>CC28055U***</b>	per m <sup>2</sup>
		0.55	Matt	<b>CC28055T***</b>	per m <sup>2</sup>
		0.55	Metallic	<b>CC28055M***</b>	per m <sup>2</sup>
<b>Stramit Premier 300</b> 		0.55	Ultra	<b>CC30055U***</b>	per m <sup>2</sup>
		0.55	Matt	<b>CC30055T***</b>	per m <sup>2</sup>
		0.55	Metallic	<b>CC30055M***</b>	per m <sup>2</sup>



CAIRNS  
TEL (07) 4034 6555  
FAX (07) 4034 6511

TOWNSVILLE  
TEL (07) 4412 3900  
FAX (07) 4412 3909

PREMIUM PRODUCTS • ROOFING • CLADDING

Product Roofing/Cladding/Accessories	Details	Cover Width mm	Ordering Code	Finish	BMT	Unit mm
	25mm Rib (short)	290	SLS290D55T***	Matt	0.55	per m <sup>2</sup>
		290	SLS290D55U***	Ultra	0.55	per m <sup>2</sup>
		490	SLS490D55T***	Matt	0.55	per m <sup>2</sup>
		490	SLS490D55U***	Ultra	0.55	per m <sup>2</sup>
	38mm Rib (tall)	265	SLT265D55T***	Matt	0.55	per m <sup>2</sup>
		265	SLT265D55U***	Ultra	0.55	per m <sup>2</sup>
		465	SLT465D55T***	Matt	0.55	per m <sup>2</sup>
		465	SLT465D55U***	Ultra	0.55	per m <sup>2</sup>
	25mm Rib (short)	320	SLS320C55T***	Matt	0.55	per m <sup>2</sup>
		320	SLS320C55U***	Ultra	0.55	per m <sup>2</sup>
		520	SLS520C55T***	Matt	0.55	per m <sup>2</sup>
		520	SLS520C55U***	Ultra	0.55	per m <sup>2</sup>
	38mm Rib (tall)	285	SLT285C55T***	Matt	0.55	per m <sup>2</sup>
		285	SLT285C55U***	Ultra	0.55	per m <sup>2</sup>
		465	SLT465C55T***	Matt	0.55	per m <sup>2</sup>
		465	SLT465C55U***	Ultra	0.55	per m <sup>2</sup>










PREMIUM PRODUCTS • VALLEYS & RIDGES

Product	Details	Code	Finish	BMT mm	Unit
Stramit® Valley (Folded Gutter)	450mm	VPFL55U***	Ultra	0.55	lin metre
		VPFL55SSUR	Stainless	0.55	lin metre
	400mm	VPF55T**	Matt	0.55	lin metre
Stramit® Roll Top Ridge (400mm)	Cut to Length (max 6m)	RTR55U***	Ultra	0.55	lin metre
		RTR55T***	Matt	0.55	lin metre
		RTR55S***	Stainless	0.55	lin metre
Stramit® Ridge Cap (3 Break) (400mm)	Cut to Length	RFMC55U***	Ultra	0.55	lin metre
		RFMC55SSUR	Stainless	0.55	lin metre
Stramit® Gable Roll	50mm x 2.0m	ER50U***20	Ultra	0.55	length
		ER50SSUR20	Stainless	0.55	length
Stramit® Downpipe	100mm x 75mm x 2.4m	DP10075U***24	Ultra	0.55	length
		DP10075T***24	Matt	0.55	length
		DP10075SSUR24	Stainless	0.55	length
Stramit® Roll Top Barge	Cut to Length (max 6m)	RTB55U***	Ultra	0.55	lin metre



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

PREMIUM PRODUCTS • FASCIA • GUTTERS • ACCESSORIES









Product	Product Details	Code	Finish	Unit	
FASCIA Stramit® Fascia		FBU***	Ultra	lin metre	
		FBT***	Matt	lin metre	
Accessories		Internal Corner	FBICU***	Ultra	each
		External Corner	FBECU*** FBECT*** FBICT***	Ultra Matt Matt	each each each
		Barge Corner Cover Cap (Left and Right)	FBBCLT*** FBBCRT***	Matt Matt	each each
		Apex Joiner (Cover) Plate	FBBCRT***	Matt	each
	GUTTERS Stramit Queensland Quad®		QQSU***	Ultra	lin metre
QQST***			Matt	lin metre	
Accessories		Concealed Bracket	QQSCBSS	Stainless Steel	each
		Stop End - Left Stop End - Right	QQSSELT*** QQSSERT***	Matt Matt	each each
		External Corner	QQSECT***	Matt	each
		Internal Corner	QQSECT***	Matt	each
	Stramit® Quad 150		QQ150U***	Ultra	lin metre
QQ150T***			Matt	lin metre	
Accessories		Concealed Bracket	QQ150CBSS	Stainless Steel	each
		Spike Bracket	QQ150SPBT***	Matt	each
		Stop End - Left Stop End - Right	QQ150SELT*** QQ150SERT***	Matt Matt	each each



CAIRNS  
TEL (07) 4034 6555  
FAX (07) 4034 6511

TOWNSVILLE  
TEL (07) 4412 3900  
FAX (07) 4412 3909

PREMIUM PRODUCTS • FASCIA • GUTTERS • ACCESSORIES

Product	Product Details	Code	Finish	Unit
Stramit Quad 175° 		QQ175U***	Ultra	lin metre
		QQ175M***	Metallic	lin metre
		QQ175T***	Matt	lin metre
	Accessories 	QQ175SPBT***	Matt	each
		QQ175SELT***	Matt	each
		QQ175SERT***	Matt	each
Stramit Compact Gutter® 		CGSU***	Ultra	lin metre
Accessories 	Concealed Bracket	CGCBSS	Stainless Steel	each
Stramit Half Round 150 Gutter® 		HRGR150PU***	Ultra	lin metre
		HRGR150PSSUR	Stainless	lin metre
		HRGR150PT***	Matt	lin metre
		HRGR150SU***	Ultra	lin metre
		HRGR150SSSUR	Ultra	lin metre
		HRGR150ST***	Matt	lin metre
Stramit Flatback Half Round Gutter® 		HRGFB150PU***	Ultra	lin metre
		HRGFB150PSSUR	Stainless	lin metre
		HRGFB150PT***	Matt	lin metre
		HRGFB150SU***	Ultra	lin metre
		HRGFB150SSSUR	Stainless	lin metre
		HRGFB150ST***	Matt	lin metre
Stramit Compact Gutter® Barge 		CGBU***	Ultra	lin metre
<b>*Note - When using stainless steel brackets with ultra products Isolation is required.</b>				



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

PREMIUM PRODUCTS • CUSTOM FLASHINGS

GUIDELINES FOR USE OF VARIOUS STAINLESS STEEL GRADES	
STAINLESS STEEL GRADE & FINISH	SUGGESTED APPLICATIONS
304 2B	Suitable for external use in moderate or non coastal locations.
316 No. 4 ( Brushed / Polished )	Suitable for internal and external use in moderate locations. For external coastal locations 316 2B would be recommended
316 2B	Suitable for external use in moderate and coastal locations

METRIC CONVERSION CHART	
METRIC THICKNESS	EQUIVALENT GAUGE
0.4mm	26G
0.6mm	24G
0.8mm	22G
1.0mm	20G
1.2mm	18G
1.6mm	16G
2.0mm	14G
2.5mm	12G
3.0mm	10G

NOTES
<ul style="list-style-type: none"><li>Squash fold = 2 bends</li><li>Minimum fold = 10mm</li><li>Girth under 100mm maximum length 3600. Over 100mm maximum length 8000.</li></ul> <p>Subject to suitability of shape and delivery arrangements. See Delivery Details (see Page 6&amp;7)</p> <ul style="list-style-type: none"><li>Stramit® Custom Flashings have a minimum charged length of 1 linear metre - if you order lengths multiple lengths less than a linear metre, the charge will be for one linear metre of each flashing ordered</li><li>Flat sheets cannot be supplied as a "roll up"</li></ul> <p>Due to the nature of Flat Sheet, we cannot guarantee this product by normal transport without damage. Therefore, we strongly recommend that orders for Flat Sheet be collected from our factory. However, if you still require us to deliver Flat Sheet, <b>WE WILL NOT ACCEPT ANY RESPONSIBILITY FOR DAMAGE WHICH MAY OCCUR.</b> Alternatively, we can supply Flat Sheet with a Timber Pallet which will incur a surcharge.</p>

ORDER BY FAX

For best results, send your profile details by fax to the nearest branch.

Ask for our Stramit Flashing Detail Pad (see page 34)





**CAIRNS**  
TEL (07) 4034 6555  
FAX (07) 4034 6511

**TOWNSVILLE**  
TEL (07) 4412 3900  
FAX (07) 4412 3909

## CUSTOM FLASHINGS PREMIUM PRODUCTS

### COLORBOND® ULTRA STEEL 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00U***	CF055B01U***	CF055B02U***	CF055B03U***	CF055B04U***	CF055B05U***	CF055B06U***	CF055B07U***	CF055B08U***
101-150 (C)	CF055C00U***	CF055C01U***	CF055C02U***	CF055C03U***	CF055C04U***	CF055C05U***	CF055C06U***	CF055C07U***	CF055C08U***
151-200 (D)	CF055D00U***	CF055D01U***	CF055D02U***	CF055D03U***	CF055D04U***	CF055D05U***	CF055D06U***	CF055D07U***	CF055D08U***
201-250 (E)	CF055E00U***	CF055E01U***	CF055E02U***	CF055E03U***	CF055E04U***	CF055E05U***	CF055E06U***	CF055E07U***	CF055E08U***
251-300 (F)	CF055F00U***	CF055F01U***	CF055F02U***	CF055F03U***	CF055F04U***	CF055F05U***	CF055F06U***	CF055F07U***	CF055F08U***
301-350 (G)	CF055G00U***	CF055G01U***	CF055G02U***	CF055G03U***	CF055G04U***	CF055G05U***	CF055G06U***	CF055G07U***	CF055G08U***
351-400 (H)	CF055H00U***	CF055H01U***	CF055H02U***	CF055H03U***	CF055H04U***	CF055H05U***	CF055H06U***	CF055H07U***	CF055H08U***
401-500 (J)	CF055J00U***	CF055J01U***	CF055J02U***	CF055J03U***	CF055J04U***	CF055J05U***	CF055J06U***	CF055J07U***	CF055J08U***
501-600 (L)	CF055L00U***	CF055L01U***	CF055L02U***	CF055L03U***	CF055L04U***	CF055L05U***	CF055L06U***	CF055L07U***	CF055L08U***
601-700 (N)	CF055N00U***	CF055N01U***	CF055N02U***	CF055N03U***	CF055N04U***	CF055N05U***	CF055N06U***	CF055N07U***	CF055N08U***
701-800 (P)	CF055P00U***	CF055P01U***	CF055P02U***	CF055P03U***	CF055P04U***	CF055P05U***	CF055P06U***	CF055P07U***	CF055P08U***
801-900 (R)	CF055R00U***	CF055R01U***	CF055R02U***	CF055R03U***	CF055R04U***	CF055R05U***	CF055R06U***	CF055R07U***	CF055R08U***
901-1000 (T)	CF055T00U***	CF055T01U***	CF055T02U***	CF055T03U***	CF055T04U***	CF055T05U***	CF055T06U***	CF055T07U***	CF055T08U***
1001-1100 (V)	CF055V00U***	CF055V01U***	CF055V02U***	CF055V03U***	CF055V04U***	CF055V05U***	CF055V06U***	CF055V07U***	CF055V08U***
1101-1200 (X)	CF055X00U***	CF055X01U***	CF055X02U***	CF055X03U***	CF055X04U***	CF055X05U***	CF055X06U***	CF055X07U***	CF055X08U***

### COLORBOND® METALLIC STEEL 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00M***	CF055B01M***	CF055B02M***	CF055B03M***	CF055B04M***	CF055B05M***	CF055B06M***	CF055B07M***	CF055B08M***
101-150 (C)	CF055C00M***	CF055C01M***	CF055C02M***	CF055C03M***	CF055C04M***	CF055C05M***	CF055C06M***	CF055C07M***	CF055C08M***
151-200 (D)	CF055D00M***	CF055D01M***	CF055D02M***	CF055D03M***	CF055D04M***	CF055D05M***	CF055D06M***	CF055D07M***	CF055D08M***
201-250 (E)	CF055E00M***	CF055E01M***	CF055E02M***	CF055E03M***	CF055E04M***	CF055E05M***	CF055E06M***	CF055E07M***	CF055E08M***
251-300 (F)	CF055F00M***	CF055F01M***	CF055F02M***	CF055F03M***	CF055F04M***	CF055F05M***	CF055F06M***	CF055F07M***	CF055F08M***
301-350 (G)	CF055G00M***	CF055G01M***	CF055G02M***	CF055G03M***	CF055G04M***	CF055G05M***	CF055G06M***	CF055G07M***	CF055G08M***
351-400 (H)	CF055H00M***	CF055H01M***	CF055H02M***	CF055H03M***	CF055H04M***	CF055H05M***	CF055H06M***	CF055H07M***	CF055H08M***
401-500 (J)	CF055J00M***	CF055J01M***	CF055J02M***	CF055J03M***	CF055J04M***	CF055J05M***	CF055J06M***	CF055J07M***	CF055J08M***
501-600 (L)	CF055L00M***	CF055L01M***	CF055L02M***	CF055L03M***	CF055L04M***	CF055L05M***	CF055L06M***	CF055L07M***	CF055L08M***
601-700 (N)	CF055N00M***	CF055N01M***	CF055N02M***	CF055N03M***	CF055N04M***	CF055N05M***	CF055N06M***	CF055N07M***	CF055N08M***
701-800 (P)	CF055P00M***	CF055P01M***	CF055P02M***	CF055P03M***	CF055P04M***	CF055P05M***	CF055P06M***	CF055P07M***	CF055P08M***
801-900 (R)	CF055R00M***	CF055R01M***	CF055R02M***	CF055R03M***	CF055R04M***	CF055R05M***	CF055R06M***	CF055R07M***	CF055R08M***
901-1000 (T)	CF055T00M***	CF055T01M***	CF055T02M***	CF055T03M***	CF055T04M***	CF055T05M***	CF055T06M***	CF055T07M***	CF055T08M***
1001-1100 (V)	CF055V00M***	CF055V01M***	CF055V02M***	CF055V03M***	CF055V04M***	CF055V05M***	CF055V06M***	CF055V07M***	CF055V08M***
1101-1200 (X)	CF055X00M***	CF055X01M***	CF055X02M***	CF055X03M***	CF055X04M***	CF055X05M***	CF055X06M***	CF055X07M***	CF055X08M***

### COLORBOND® STAINLESS STEEL IN SURFMIST® 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00SSUR	CF055B01SSUR	CF055B02SSUR	CF055B03SSUR	CF055B04SSUR	CF055B05SSUR	CF055B06SSUR	CF055B07SSUR	CF055B08SSUR
101-150 (C)	CF055C00SSUR	CF055C01SSUR	CF055C02SSUR	CF055C03SSUR	CF055C04SSUR	CF055C05SSUR	CF055C06SSUR	CF055C07SSUR	CF055C08SSUR
151-200 (D)	CF055D00SSUR	CF055D01SSUR	CF055D02SSUR	CF055D03SSUR	CF055D04SSUR	CF055D05SSUR	CF055D06SSUR	CF055D07SSUR	CF055D08SSUR
201-250 (E)	CF055E00SSUR	CF055E01SSUR	CF055E02SSUR	CF055E03SSUR	CF055E04SSUR	CF055E05SSUR	CF055E06SSUR	CF055E07SSUR	CF055E08SSUR
251-300 (F)	CF055F00SSUR	CF055F01SSUR	CF055F02SSUR	CF055F03SSUR	CF055F04SSUR	CF055F05SSUR	CF055F06SSUR	CF055F07SSUR	CF055F08SSUR
301-350 (G)	CF055G00SSUR	CF055G01SSUR	CF055G02SSUR	CF055G03SSUR	CF055G04SSUR	CF055G05SSUR	CF055G06SSUR	CF055G07SSUR	CF055G08SSUR
351-400 (H)	CF055H00SSUR	CF055H01SSUR	CF055H02SSUR	CF055H03SSUR	CF055H04SSUR	CF055H05SSUR	CF055H06SSUR	CF055H07SSUR	CF055H08SSUR
401-500 (J)	CF055J00SSUR	CF055J01SSUR	CF055J02SSUR	CF055J03SSUR	CF055J04SSUR	CF055J05SSUR	CF055J06SSUR	CF055J07SSUR	CF055J08SSUR
501-600 (L)	CF055L00SSUR	CF055L01SSUR	CF055L02SSUR	CF055L03SSUR	CF055L04SSUR	CF055L05SSUR	CF055L06SSUR	CF055L07SSUR	CF055L08SSUR
601-700 (N)	CF055N00SSUR	CF055N01SSUR	CF055N02SSUR	CF055N03SSUR	CF055N04SSUR	CF055N05SSUR	CF055N06SSUR	CF055N07SSUR	CF055N08SSUR
701-800 (P)	CF055P00SSUR	CF055P01SSUR	CF055P02SSUR	CF055P03SSUR	CF055P04SSUR	CF055P05SSUR	CF055P06SSUR	CF055P07SSUR	CF055P08SSUR
801-900 (R)	CF055R00SSUR	CF055R01SSUR	CF055R02SSUR	CF055R03SSUR	CF055R04SSUR	CF055R05SSUR	CF055R06SSUR	CF055R07SSUR	CF055R08SSUR
901-1000 (T)	CF055T00SSUR	CF055T01SSUR	CF055T02SSUR	CF055T03SSUR	CF055T04SSUR	CF055T05SSUR	CF055T06SSUR	CF055T07SSUR	CF055T08SSUR
1001-1100 (V)	CF055V00SSUR	CF055V01SSUR	CF055V02SSUR	CF055V03SSUR	CF055V04SSUR	CF055V05SSUR	CF055V06SSUR	CF055V07SSUR	CF055V08SSUR
1101-1200 (X)	CF055X00SSUR	CF055X01SSUR	CF055X02SSUR	CF055X03SSUR	CF055X04SSUR	CF055X05SSUR	CF055X06SSUR	CF055X07SSUR	CF055X08SSUR

NOTE: Length Tolerance is - 0 + 15mm. Please advise if flashing length is critical.  
StandardBend Tolerance is ± 2.0mm.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

## CUSTOM FLASHINGS PREMIUM PRODUCTS

### 316 STAINLESS 2B 0.55

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF055B00SS12	CF055B01SS12	CF055B02SS12	CF055B03SS12	CF055B04SS12	CF055B05SS12	CF055B06SS12
101-150 (C)	CF055C00SS12	CF055C01SS12	CF055C02SS12	CF055C03SS12	CF055C04SS12	CF055C05SS12	CF055C06SS12
151-200 (D)	CF055D00SS12	CF055D01SS12	CF055D02SS12	CF055D03SS12	CF055D04SS12	CF055D05SS12	CF055D06SS12
201-250 (E)	CF055E00SS12	CF055E01SS12	CF055E02SS12	CF055E03SS12	CF055E04SS12	CF055E05SS12	CF055E06SS12
251-300 (F)	CF055F00SS12	CF055F01SS12	CF055F02SS12	CF055F03SS12	CF055F04SS12	CF055F05SS12	CF055F06SS12
301-350 (G)	CF055G00SS12	CF055G01SS12	CF055G02SS12	CF055G03SS12	CF055G04SS12	CF055G05SS12	CF055G06SS12
351-400 (H)	CF055H00SS12	CF055H01SS12	CF055H02SS12	CF055H03SS12	CF055H04SS12	CF055H05SS12	CF055H06SS12
401-500 (J)	CF055J00SS12	CF055J01SS12	CF055J02SS12	CF055J03SS12	CF055J04SS12	CF055J05SS12	CF055J06SS12
501-600 (L)	CF055L00SS12	CF055L01SS12	CF055L02SS12	CF055L03SS12	CF055L04SS12	CF055L05SS12	CF055L06SS12
601-700 (N)	CF055N00SS12	CF055N01SS12	CF055N02SS12	CF055N03SS12	CF055N04SS12	CF055N05SS12	CF055N06SS12
701-800 (P)	CF055P00SS12	CF055P01SS12	CF055P02SS12	CF055P03SS12	CF055P04SS12	CF055P05SS12	CF055P06SS12
801-900 (R)	CF055R00SS12	CF055R01SS12	CF055R02SS12	CF055R03SS12	CF055R04SS12	CF055R05SS12	CF055R06SS12
901-1000 (T)	CF055T00SS12	CF055T01SS12	CF055T02SS12	CF055T03SS12	CF055T04SS12	CF055T05SS12	CF055T06SS12
1001-1100 (V)	CF055V00SS12	CF055V01SS12	CF055V02SS12	CF055V03SS12	CF055V04SS12	CF055V05SS12	CF055V06SS12
1101-1200 (X)	CF055X00SS12	CF055X01SS12	CF055X02SS12	CF055X03SS12	CF055X04SS12	CF055X05SS12	CF055X06SS12

### 304 STAINLESS 2B 0.55 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF055B00SS02	CF055B01SS02	CF055B02SS02	CF055B03SS02	CF055B04SS02	CF055B05SS02	CF055B06SS02
101-150 (C)	CF055C00SS02	CF055C01SS02	CF055C02SS02	CF055C03SS02	CF055C04SS02	CF055C05SS02	CF055C06SS02
151-200 (D)	CF055D00SS02	CF055D01SS02	CF055D02SS02	CF055D03SS02	CF055D04SS02	CF055D05SS02	CF055D06SS02
201-250 (E)	CF055E00SS02	CF055E01SS02	CF055E02SS02	CF055E03SS02	CF055E04SS02	CF055E05SS02	CF055E06SS02
251-300 (F)	CF055F00SS02	CF055F01SS02	CF055F02SS02	CF055F03SS02	CF055F04SS02	CF055F05SS02	CF055F06SS02
301-350 (G)	CF055G00SS02	CF055G01SS02	CF055G02SS02	CF055G03SS02	CF055G04SS02	CF055G05SS02	CF055G06SS02
351-400 (H)	CF055H00SS02	CF055H01SS02	CF055H02SS02	CF055H03SS02	CF055H04SS02	CF055H05SS02	CF055H06SS02
401-500 (J)	CF055J00SS02	CF055J01SS02	CF055J02SS02	CF055J03SS02	CF055J04SS02	CF055J05SS02	CF055J06SS02
501-600 (L)	CF055L00SS02	CF055L01SS02	CF055L02SS02	CF055L03SS02	CF055L04SS02	CF055L05SS02	CF055L06SS02
601-700 (N)	CF055N00SS02	CF055N01SS02	CF055N02SS02	CF055N03SS02	CF055N04SS02	CF055N05SS02	CF055N06SS02
701-800 (P)	CF055P00SS02	CF055P01SS02	CF055P02SS02	CF055P03SS02	CF055P04SS02	CF055P05SS02	CF055P06SS02
801-900 (R)	CF055R00SS02	CF055R01SS02	CF055R02SS02	CF055R03SS02	CF055R04SS02	CF055R05SS02	CF055R06SS02
901-1000 (T)	CF055T00SS02	CF055T01SS02	CF055T02SS02	CF055T03SS02	CF055T04SS02	CF055T05SS02	CF055T06SS02
1001-1100 (V)	CF055V00SS02	CF055V01SS02	CF055V02SS02	CF055V03SS02	CF055V04SS02	CF055V05SS02	CF055V06SS02
1101-1200 (X)	CF055X00SS02	CF055X01SS02	CF055X02SS02	CF055X03SS02	CF055X04SS02	CF055X05SS02	CF055X06SS02

### COLORBOND® STEEL MATT 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00T***	CF055B01T***	CF055B02T***	CF055B03T***	CF055B04T***	CF055B05T***	CF055B06T***	CF055B07T***	CF055B08T***
101-150 (C)	CF055C00T***	CF055C01T***	CF055C02T***	CF055C03T***	CF055C04T***	CF055C05T***	CF055C06T***	CF055C07T***	CF055C08T***
151-200 (D)	CF055D00T***	CF055D01T***	CF055D02T***	CF055D03T***	CF055D04T***	CF055D05T***	CF055D06T***	CF055D07T***	CF055D08T***
201-250 (E)	CF055E00T***	CF055E01T***	CF055E02T***	CF055E03T***	CF055E04T***	CF055E05T***	CF055E06T***	CF055E07T***	CF055E08T***
251-300 (F)	CF055F00T***	CF055F01T***	CF055F02T***	CF055F03T***	CF055F04T***	CF055F05T***	CF055F06T***	CF055F07T***	CF055F08T***
301-350 (G)	CF055G00T***	CF055G01T***	CF055G02T***	CF055G03T***	CF055G04T***	CF055G05T***	CF055G06T***	CF055G07T***	CF055G08T***
351-400 (H)	CF055H00T***	CF055H01T***	CF055H02T***	CF055H03T***	CF055H04T***	CF055H05T***	CF055H06T***	CF055H07T***	CF055H08T***
401-500 (J)	CF055J00T***	CF055J01T***	CF055J02T***	CF055J03T***	CF055J04T***	CF055J05T***	CF055J06T***	CF055J07T***	CF055J08T***
501-600 (L)	CF055L00T***	CF055L01T***	CF055L02T***	CF055L03T***	CF055L04T***	CF055L05T***	CF055L06T***	CF055L07T***	CF055L08T***
601-700 (N)	CF055N00T***	CF055N01T***	CF055N02T***	CF055N03T***	CF055N04T***	CF055N05T***	CF055N06T***	CF055N07T***	CF055N08T***
701-800 (P)	CF055P00T***	CF055P01T***	CF055P02T***	CF055P03T***	CF055P04T***	CF055P05T***	CF055P06T***	CF055P07T***	CF055P08T***
801-900 (R)	CF055R00T***	CF055R01T***	CF055R02T***	CF055R03T***	CF055R04T***	CF055R05T***	CF055R06T***	CF055R07T***	CF055R08T***
901-1000 (T)	CF055T00T***	CF055T01T***	CF055T02T***	CF055T03T***	CF055T04T***	CF055T05T***	CF055T06T***	CF055T07T***	CF055T08T***
1001-1100 (V)	CF055V00T***	CF055V01T***	CF055V02T***	CF055V03T***	CF055V04T***	CF055V05T***	CF055V06T***	CF055V07T***	CF055V08T***
1101-1200 (X)	CF055X00T***	CF055X01T***	CF055X02T***	CF055X03T***	CF055X04T***	CF055X05T***	CF055X06T***	CF055X07T***	CF055X08T***

MAGNAFLOW® • ROOFING • CLADDING • RAINWATER

PRODUCT – Roofing/Cladding/Rainwater	BMT (mm)
Stramit® Corrugated	0.42
Stramit Monoclad®	0.42
Stramit Longspan®	0.42
Stramit Speed Deck Ultra®	0.42
Stramit® Roll Top Ridge	0.42 / 0.55
Stramit® Valley Folded	0.55
Stramit® Flashings & Others	0.55
Stramit® Downpipes 95 x 45	0.55
Stramit® Downpipes 100 x 50	0.55
Stramit® Downpipes 100 x 75	0.55
Stramit® Downpipes 100 x 100	0.55

Please refer to Sales office for lead times and availability.

MagnaFlow® sheeting is a highly durable prepainted sheet steel system suitable for use in corrosive environments for roofing, walling and rainwater products. The protective metallic coating on the base steel is a new technology in accordance with AS1397 -2011. This coating provides the added durability of the MagnaFlow® product.

Please enquire at your local Stramit office to confirm colour availability.

SUBSTRATE

The coating on the steel substrate complies with the coating classes as specified in AS 1397 – 2011: Continuous Hot Dipped Metallic Coated Steel Sheet and Strip – Coatings of Zinc, and Zinc Alloyed with Aluminium and Magnesium. The MagnaFlow® coating comprises zinc, aluminium and magnesium and delivers more durable site performance than standard zinc or Zinc/aluminium systems. Minimum coating mass is 240gsm.

RECOMMENDED END USES

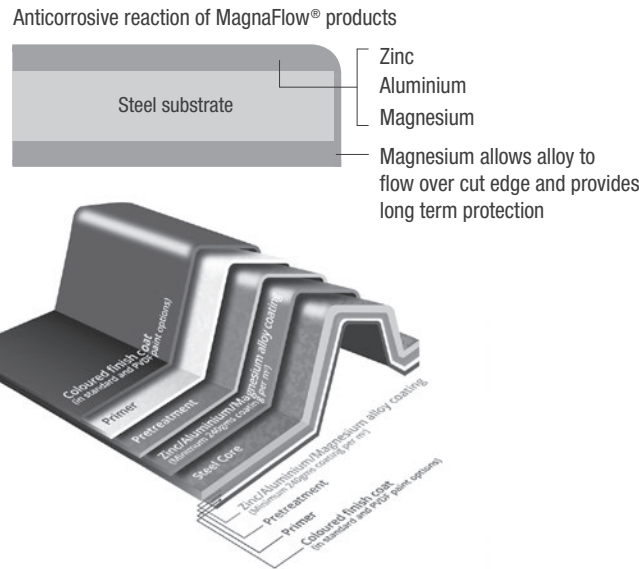
MagnaFlow® paint systems have a very good colour and gloss retention and are suitable for roofing, cladding and rainwater goods. It is ideal for animal shelters, flashings, interior uses, and exterior environments where corrosion levels are moderate. It is also suitable for fencing applications.

MAGNAFLOW® WARRANTIES

A range of warranties are available to support MagnaFlow® products for various exposure conditions. Please contact your local Stramit office for details.

THE MAGIC OF MAGNESIUM

All steel roofs are susceptible to the elements along cut edges however the addition of magnesium to the standard zinc/aluminium alloy in MagnaFlow® products provides superior corrosion resistance in this area. As time goes on it allows the protective metal coating to microscopically flow over the cut edge. At this point a sacrificial anticorrosive reaction takes place and a robust seal is created.



PRODUCT AVAILABILITY - MAGNAFLOW COLOURS												
Product	BMT (mm)	Magnaflow Colours ZM8 ***										
		AGY	BCH	MLH	OWH	SLG	GUL	SCM	CFG	HRD	MGN	MBL
Roofing	0.42	Y	POA	Y	Y	Y	CHECK	POA	POA	POA	POA	POA
	0.48	POA	POA	Y	Y	Y	POA	POA	POA	POA	POA	POA
Fascia	0.42	Y	Y	POA	Y	Y	POA	Y	POA	POA	POA	POA
QLD Quad / 150 Half Rnd	0.42	Y	Y	POA	Y	Y	POA	POA	POA	POA	POA	POA
M Gutter	0.42	Y	Y	POA	Y	Y	POA	Y	POA	POA	POA	POA
Quad 175	0.55	POA	POA	POA	POA	POA	POA	POA	POA	POA	POA	POA
Flashings	0.55	Y	Y	Y	Y	Y	POA	POA	POA	POA	POA	POA

MAGNAFLOW COLOUR NAMES

AGY	Armour Grey	SLG	Slate Grey	HRD	Heritage Red
BCH	Birch	GUL	Gull Grey	MGN	Mist Green
MLH	Monolith	SCM	Smooth Cream	MBL	Mountain Blue
OWH	Off White	CFG	Caulfield Cream		

NOTES



## NON STANDARD RAINWATER HEAD GUIDE

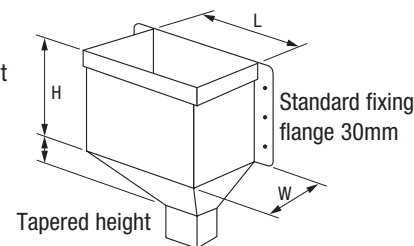
### STRAMIT® CUSTOM PRODUCTS

















































Source your custom rainwater heads from the roofing experts. We offer you a complete range to suit any architectural style. We can manufacture rainwater heads to your specifications.

STANDARD SIZE: 250(W) x 400(L) x 350(H).

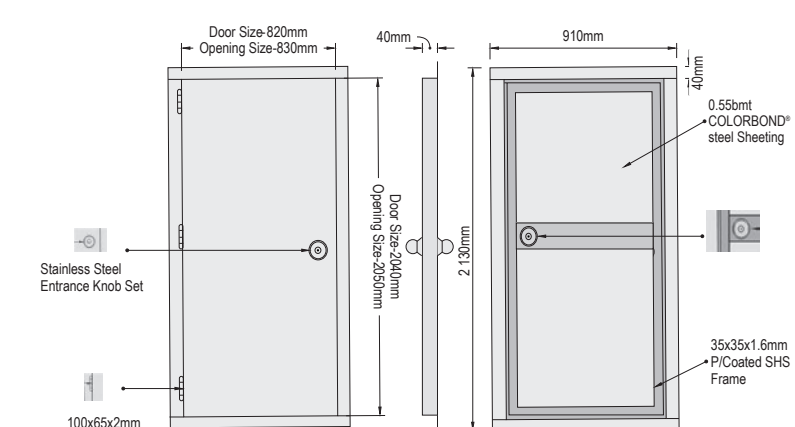
MATERIALS: Copper, Galvanised, Zinc-aluminium alloy, Stainless Steel, COLORBOND® steel.

For further information please contact your local Stramit branch. **Price on application.**




	01	02	03	04	05	06
<b>CCY</b>	 CCY01	 CCY02	 CCY03	 CCY04	 CCY05	 CCY06
<b>CT</b>	 CT01	 CT02	 CT03	 CT04	 CT05	 CT06
<b>TF</b>	 TF01	 TF02	 TF03	 TF04	 TF05	 TF06
<b>CF</b>	 CF01	 CF02	 CF03	 CF04	 CF05	 CF06
<b>CCN</b>	 CCN01	 CCN02	 CCN03	 CCN04	 CCN05	 CCN06
<b>CI</b>	 CI01	 CI02	 CI03	 CI04	 CI05	 CI06
<b>TD</b>	 TD01	 TD02	 TD03	 TD04	 TD05	 TD06
<b>TH</b>	 TH01	 TH02	 TH03	 TH04	 TH05	 TH06

## BUILDER'S PRODUCTS

Product Builder's Products	Product Details	Code	Finish	BMT mm	Unit
Window Flashing	1.8m, 38 x 50 1.8m, 38 x 75 1.8m, 75 x 113  Ex Brisbane	<b>WF3850GA18</b> <b>WF3875GA18</b> <b>WF75113GA18</b>	GA GA GA	0.4 0.4 0.4	each each each
Stump Caps Pack 50	Edge Square 230mm x 230mm (moulded)  250mm Round 300mm Round	<b>SC2323ME40GA</b>  <b>SC2540GA</b> <b>SC3040GA</b>	GA  GA GA		each  each each
Builder's Strapping	32mm x 1.2mm 32mm x 1.6mm 38mm x 1.2mm 38mm x 1.6mm  32mm x 1.2mm 32mm x 1.6mm 50mm x 1.2mm	<b>BST321230</b> <b>BST321630</b> <b>BST381230</b> <b>BST381630</b>  <b>BST321250</b> <b>BST321650</b> <b>BST501250</b>	GA GA GA GA  GA GA GA	1.2 1.6 1.2 1.6  1.2 1.6 1.2	30m roll 30m roll 30m roll 30m roll  50m roll 50m roll 50m roll
Personal Doors Standard Door Only	2040mm X 820mm X 40mm 2040mm X 820mm X 40mm  NB: No Jambs, Hinges or Lock assembly included. Not all colours stocked. Price includes packaging.	<b>PAD2040820ZA</b> <b>PAD2040820X***</b>	ZA COL		each each
PA Door Deluxe	2040mm X 820mm X 35mm 2040mm X 820mm X 35mm	<b>PADJ2040820ZA</b> <b>PADJ2040820X***</b>	ZA COL		each each
					

NB: This is a full pre-hung door including entrance set. Not all colours stocked.


RAINWATER CAPS • RAINHEADS • OVERFLOWS • ROOF VENTILATION

Product	Details	Code	Unit
Rainwater Caps/Rainheads/Overflows/Roof Ventilation			
Chinaman's Hat ex Sydney (on Short pipe) 	100mm	CAP100GA	each
	125mm	CAP125GA	each
	150mm	CAP150GA	each
	200mm	CAP200GA	each
	250mm	CAP250GA	each

NOTE: Other sizes available through Eziform but ensure short pipe is included on request.

Asbestos Cement Repair Sheet


SSRSGA30




(To fit "super" and "deep 6")  
3.000m galvanised stock only. Overall sheet width 620.

Metal Louvres

Custom made to order  
Kit form or assembled



Overflows




Curved Metal Flashings

Custom made to suit any radius  
(Require radius and/or template)




COMMERCIAL VENTED RIDGE

Product	Product Details	Code	Unit
Dual Flow Vented Ridge			



Dual Flow Vented Ridge



Quad Flow Vented Ridge


Quad Ventilated ridge Upflow open top	300/450/600/75/900/1200 mm Throat	Please contact your Stramit Representative	lin metre
Dual Ventilated Ridge Downflow Closed Top	300/450/600 mm Throat	Please contact your Stramit Representative	lin metre

Information required for quoting or ordering process:


Type of Ridge Vent: ☐ Upflow (Open Top/Quad Flow) ☐ Downflow (Closed Top/Dual Flow)  
Throat size: \_\_\_\_\_mm  
Colour: ☐ ZINCALUME® steel ☐ COLORBOND® steel (specify colour & finish) \_\_\_\_\_  
Roof Pitch: \_\_\_\_\_degrees (zero degrees if Ridge Vent is on the slope of the roof)  
Qty \_\_\_\_\_ @ \_\_\_\_\_m / Qty \_\_\_\_\_ @ \_\_\_\_\_  
Qty \_\_\_\_\_ @ \_\_\_\_\_m / Qty \_\_\_\_\_ @ \_\_\_\_\_  
Roofing Profile: ☐ Corrugated ☐ Monoclad ☐ Longspan ☐ Other \_\_\_\_\_

NOTE: - Stop ends included in kit  
- under certain circumstances Vented Ridge may mist  
- maximum length 8.0m  
- check your local branch for lead time

SUMPS

Product Sumps	Size mm	Code	Unit
Flat Bottom	Extra with fitted drop		
Standard fixing flange 25mm 	200 x 200 x 100/150	SUF2020/10/15/ZA/X***	each
	300 x 300 x 100/150	SUF3030/10/15/ZA/X***	each
	400 x 400 x 100/150	SUF4040/10/15/ZA/X***	each
	500 x 500 x 100/150	SUF5050/10/15/ZA/X***	each
	600 x 600 x 100/150	SUF6060/10/15/ZA/X***	each
	700 x 700 x 100/150	SUF7070/10/15/ZA/X***	each
	800 x 800 x 100/150	SUF8080/10/15/ZA/X***	each
	All sizes available in Stainless Steel also.		

ADJUSTABLE BOX GUTTER BRACKETS

Product Adjustable Box Gutter Brackets	Details	Code	Unit
	Suits 250-400 24 per box	BGBA1EAZA	each
	Suits 400-650 24 per box	BGBA2EAZA	each
	Suits 650-1000 18 per box	BGBA3EAZA	each
Recommended spacing is 600mm.			

Box Gutter Board 6.0m only

LSGBZA6000


each



600mm width

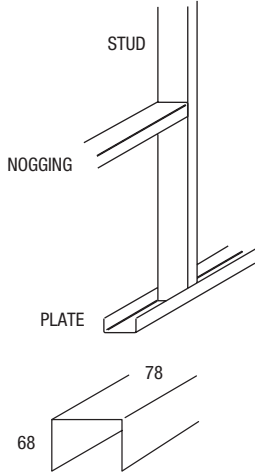
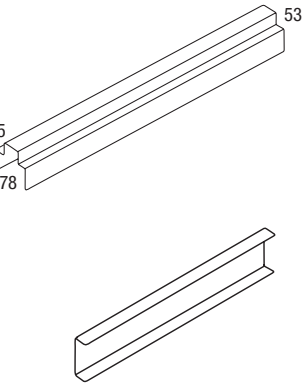

Safe Trays

Stainless Steel 316 2B Soft Soldered










400mm x 400mm	ST4040/05/10/055/SS	each
500mm x 500mm	ST5050/05/10/055/SS	each
600mm x 600mm	ST6060/05/10/055/SS	each
700mm x 700mm	ST7070/05/10/055/SS	each
800mm x 800mm	ST8080/05/10/055/SS	each
Other Sizes	Please contact your Stramit Representative	
Bulk orders only		

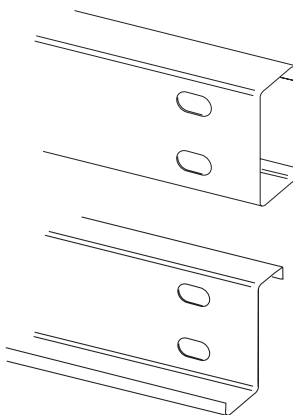


## STRUCTURAL SECTIONS

Product Structural Sections	Product Details	Code	BMT mm	Unit
	<b>Stramit® Stud Sections</b>			
	Standard Stud (Hi Tensile) 75 x 32mm, 7.5m stock length Cut to length	<b>SBQS7512UTC7500</b> <b>SBQS7512UTC</b>	1.2 1.2	per length lin metre
	Standard Nogging (Hi Tensile) 72 x 34mm, 7.5m stock length Cut to length	<b>SBQN7212UTC7500</b> <b>SBQN7212UTC</b>	1.2 1.2	per length lin metre
	Standard Plate (Hi Tensile) 78 x 31mm, 7.5m stock length Cut to length	<b>SBQP7812UTC7500</b> <b>SBQP7812UTC</b>	1.2 1.2	per length lin metre
	Long Leg Stud	<b>SBQSSLL12TC</b>	1.2	lin metre
	Long Leg Plate	<b>SBQPSLL12TC</b>	1.2	lin metre
	90mm Stud (Hi Tensile) Cut to length (ex Cairns)	<b>SBQS9012UTC</b>	1.2	lin metre
	87mm Nogging (Hi Tensile) Cut to length (ex Cairns)	<b>SBQN8712UTC</b>	1.2	lin metre
	93mm Plate (Hi Tensile) Cut to length (ex Cairns)	<b>SBQP9312UTC</b>	1.2	lin metre
	Stiffened Top Plate 7.5m stock length Ex Brisbane	<b>SBPST16TC75</b>	1.6	per length
	Nesting Channel (suit 100)	<b>CH10715*</b>	1.5	per metre
	(suit 100)	<b>CH10719*</b>	1.9	per metre
	(suit 150)	<b>CH15715*</b>	1.5	per metre
	(suit 150)	<b>CH15719*</b>	1.9	per metre
	(suit 150)	<b>CH15724*</b>	2.4	per metre
	(suit 200)	<b>CH20819*</b>	1.9	per metre
	(suit 200)	<b>CH20824*</b>	2.4	per metre
	(suit 250)	<b>CH25919*</b>	1.9	per metre
	(suit 250)	<b>CH25924*</b>	2.4	per metre
	Angle Flashing (Trim Angle) 4.8m stock length 6.0m stock length	<b>AF40120GA48</b> <b>AF40120GA60</b>	1.2 1.2	per length per length
	Junction Stud 7.5m stock length	<b>SBJS12GA75</b>	1.2	per length

## STRUCTURAL SECTIONS

Product Structural Sections	Product Details	Code	Finish	BMT mm	Unit
<b>Stramit® Ceiling Batten</b> 	Stock Length 6100 20 x 30 x 10 x 6.1m TRUECORE® steel	<b>CBTC61</b>		0.42	per length
<b>Stramit® Safety Batten</b> 	20 x 30 x 10 x 6.1m  *Subject to availability	<b>CBPR61</b>		0.42	per length
<b>Stramit® Roof Batten</b> 	40mm 7.5m stock length TRUECORE® steel	<b>RBC40TC7500</b>		0.75	per length
	Hex Batten Zip 12 x 40	<b>S1240HMTZIP</b>			per box 1000
<b>Stramit® Top Hats</b> 	64mm 7.5m stock length Cut to length <b>Ex Brisbane</b>	<b>TH6475ZA7500</b> <b>TH6475ZA</b>	ZA ZA	0.75 0.75	per length per length
	7.5m stock length <b>Ex Cairns</b> Cut to length <b>Ex Brisbane</b>	<b>TH64100ZA7500</b> <b>TH64100ZA</b> <b>TH64120ZA</b> <b>TH64120ZA7500</b>	ZA ZA ZA ZA	1.00 1.00 1.20 1.20	per length lin metre lin metre per length
	<b>Ex Townsville</b>				
	96mm 7.5m stock length Cut to length <b>Ex Brisbane</b>	<b>TH9675ZA7500</b> <b>TH9675ZA</b> <b>TH96100ZA</b>	ZA ZA ZA	0.75 0.75 1.00	per length lin metre lin metre
	7.5m stock length Cut to length <b>Ex Brisbane</b>	<b>TH96120ZA7500</b> <b>TH96120ZA</b>	ZA ZA	1.20 1.20	lin length lin metre
	120mm  Cut to length <b>Ex Sydney</b> Min 1.5m, Max 9.0m	<b>TH12070ZA</b> <b>TH12090ZA</b> <b>TH120120ZA*</b>	ZA ZA ZA	0.70 0.90 1.20	lin metre lin metre lin metre
		*( cannot be lapped )			

## PURLINS &amp; GIRTS

Product Purlins & Girts	Product Details	Code	m/tonne	BMT mm	Unit
	Z350 Coating	C/Z10010*	566	1.0	per metre
		C/Z10012*	475	1.2	per metre
		C/Z10015*	383	1.5	per metre
		C/Z10019*	304	1.9	per metre
		C/Z15012*	346	1.2	per metre
		C/Z15015*	280	1.5	per metre
		C/Z15019*	220	1.9	per metre
		C/Z15024*	177	2.4	per metre
		C/Z20015*	222	1.5	per metre
		C/Z20019*	175	1.9	per metre
		C/Z20024*	140	2.4	per metre
		C/Z25019*	155	1.9	per metre
	C/Z25024*	123	2.4	per metre	
	Z450 Coating	new code details to be provided			
	*P = PUNCHED   U = UNPUNCHED   EXP = Exacta Punched   EXU = Exacta Unpunched				
Refer Page 56 for stock lengths. Minimum length 1700mm.					
Mitre Cut	MITRECUT2A			each	
C100/C150/C200/C250 up to 15° only.					
Ex Brisbane		C/Z30024*	99	2.4	per metre
		C/Z30030*	79	3.0	per metre
		C/Z35030*	65	3.0	per metre
		C/Z40030*	60	3.0	per metre
NB: Min. order quantity applies to 300 & Over Series Purlins – delivery advised at time of order placement. Mitre Cut 300/350 Not Available.					
Stramit® Fascia Purlins Fluted	23019 Fluted	FP23019F*		1.9	per metre
	Ex Brisbane. Cut to length *P = PUNCHED   U = UNPUNCHED				
Stramit® Eave Purlins	Cut to length Ex Brisbane	EP11010		1.0	per metre
	Stock lengths	EP110103000		1.0	3.0m length
		EP110103500		1.0	3.5m length
		EP110106000		1.0	6.0m length
	Cut to length Ex Brisbane	EP13012		1.2	per metre
	Stock lengths	EP130124500		1.2	4.5m length
		EP130126000		1.2	6.0m length
	EP11010** (suits 64mm Top Hat) EP13012** (suits 96mm Top Hat)				
	Cut to length minimum quantities apply.				
					

## PURLIN BRIDGING • HOLE PUNCHING

## BRIDGING

## GENERAL INFORMATION

To enhance performance in longer spans, **Stramit® Bridging** is generally used. Where wind uplift loading is dominant, greater economy can generally be achieved by using additional bridging in the end spans. The performance of purlins is improved considerably when the roof or wall cladding is attached, so bridging is normally required to ensure easy installation of cladding.

Generally, bridging spacing should not exceed 20 times the section's depth, (eg. over 3000mm for a 150mm deep section).

## CONVENTIONAL BRIDGING/STRUTS

Conventional bridging usually consists of a suitable channel section fitted with end plates which are bolted between parallel purlins.

INSTALLATION OF **STRAMIT® BRIDGING**

**Stramit® Bridging** can be installed up or down the roof slope.

The system includes adjustable ridge and fascia bridging and boltless intermediate members.

For convenience, start by installing the fascia bridging by bolting to the fascia purlin. Pass the locator end of the bridging through the purlin bridging holes, swing the bridge around to be perpendicular to the web of the purlin and lock any preceeding bridge in place. Proceed up the slope to the ridge and install the ridge bridging. The adjustable ridge bridge (turnbuckle) allows the purlins to be pulled straight and the adjustment mechanism in the fascia bridging can adjust the fascia purlin for straightness and twist.

Please contact your local Stramit office for details of component assemblies suitable for other installation procedures.

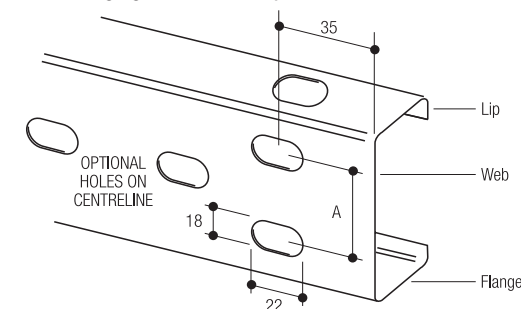
## HOLING

**Stramit® Purlins and Girts** have standard 18mm x 22mm holes punched to details supplied. Refer to punching schedule below.

Note: All purlins 300mm and above are to have 22mm round holes to suit M16 bolts as per A.I.S.C requirements. Alternative holes and hole positions by arrangement and must be nominated at time of order.

Stramit® Purlin/Girt	AISC
C/Z100	40 (A)
C/Z150	60 (A)
C/Z200	110 (A)
C/Z250	160 (A)
C/Z300	210 (A)
C/Z350	260 (A)
C/Z400	310 (A)

Bridging for C/Z400 requires 260 centres

















**NOTE: Max number of punching operations per purlin is 30.**  
**Set of web holes is one operation.**  
**Set of Flange holes is one operation.**  
**Centre punching is one operation.**

## STRAMIT® PURLIN DIMENSIONS












C SECTIONS						Z SECTIONS						
Section	Web Depth mm	Flange Width mm	Lip Length mm	Thickness BMT mm	Section Mass kg/m	Section	Web Depth mm	Broad Flange mm	Narrow Flange mm	Lip Length mm	Thickness BMT mm	Section Mass kg/m
C10010	102	51	12.5	1.0	1.77	Z10010	102	53	49	12.5	1.0	1.77
C10012	102	51	13.0	1.2	2.11	Z10012	102	53	49	13.0	1.2	2.11
C10015	102	51	14.0	1.5	2.61	Z10015	102	53	49	14.0	1.5	2.61
C10019	102	51	15.0	1.9	3.29	Z10019	102	53	49	15.0	1.9	3.29
C15012	152	64	15.0	1.2	2.90	Z15012	152	65	61	15.0	1.2	2.90
C15015	152	64	16.0	1.5	3.59	Z15015	152	65	61	16.0	1.5	3.59
C15019	152	64	17.0	1.9	4.51	Z15019	152	65	61	17.0	1.9	4.51
C15024	152	64	18.5	2.4	5.67	Z15024	152	65	61	18.5	2.4	5.67
C20015	203	76	16.0	1.5	4.50	Z20015	203	79	74	16.0	1.5	4.50
C20019	203	76	19.5	1.9	5.74	Z20019	203	79	74	19.5	1.9	5.74
C20024	203	76	21.0	2.4	7.21	Z20024	203	79	74	21.0	2.4	7.21
C25019	254	76	19.0	1.9	6.50	Z25019	254	79	74	19.0	1.9	6.50
C25024	254	76	20.5	2.4	8.17	Z25024	254	79	74	20.5	2.4	8.17
C30024	300	96	28.0	2.4	10.18	Z30024	300	100	93	28.0	2.4	10.18
C30030	300	96	31.5	3.0	12.69	Z30030	300	100	93	31.5	3.0	12.69
C35030	350	125	31.0	3.0	15.19	Z35030	350	129	121	30.0	3.0	15.19
C40030NF	400	96	31.0	3.0	15.33							
C40030BF	400	125	31.0	3.0	16.39							







## PURLINS & GIRTS – AISC BRIDGING SYSTEM

Product	Product Details	Code	Unit
<b>Purlins &amp; Girts – AISC Bridging System</b>			
Note: All AISC Bridging & Componentry available for 100-250 section sizes.			
	Intermediate Locator/Lock	<b>BI***LRLK</b>	lin metre
	Swivel Locator/Lock	<b>BIS***</b>	lin metre
	Intermediate Lock/Lock	<b>BI***LKLK</b>	lin metre
	Swivel Lock/Lock	<b>BIS***</b>	lin metre
	Intermediate Locator/Bolt	<b>BI***LRBO</b>	lin metre
	Swivel Locator/Bolt	<b>BIS***</b>	lin metre
	Intermediate Lock/Bolt	<b>BI***LKB0</b>	lin metre
	Swivel Lock/Bolt	<b>BIS***</b>	lin metre
	Intermediate Bolt/Bolt	<b>BI***BOB0</b>	lin metre
	Swivel Bolt/Bolt	<b>BIS***</b>	lin metre
	HEAVY DUTY BRIDGING		
	250 Series	<b>BHD250</b>	lin metre
	300 Series	<b>BHD300</b>	lin metre
	350 Series	<b>BHD350</b>	lin metre
	400 Series	<b>BHD400</b>	lin metre
	Ridge Lock/Lock	<b>BR***</b>	lin metre
	Ridge Locator/Locator	<b>BR***</b>	lin metre
	Ridge Bolt/Bolt	<b>BR***</b>	lin metre
	Fascia Locator/Fascia	<b>BF***</b>	lin metre
	Fascia Lock/Fascia	<b>BF***</b>	lin metre
	Fascia Bolt/Fascia	<b>BF***</b>	lin metre
	Heavy Duty Fascia Bridging	<b>BFHD***</b>	lin metre
	Fascia Girt Hanger	<b>BGHTB***</b>	lin metre
		<b>BGHTB***</b>	lin metre
		<b>BGHTB***</b>	lin metre
	Barge Girt Hanger	<b>BGHTB***</b>	lin metre
		<b>BGHTB***</b>	lin metre
		<b>BGHTB***</b>	lin metre
	Girt Foot	<b>BGF***</b>	lin metre
		<b>BGF***</b>	lin metre
		<b>BGF***</b>	lin metre

## PURLINS & GIRTS – GENERAL ACCESSORIES

Product	Product Details	Code	Unit
<b>Purlins &amp; Girts – Accessories</b>			
	Sag Rod 12mm	<b>BSR12</b>	per metre
	Sag Rod 16mm	<b>BSR16</b>	per metre
	Tie Rod Angle	<b>BTRA</b>	each
	Bridging Ends Locator	<b>BLR100</b> <b>BLR150</b> <b>BLR200</b> <b>BLR250</b>	each each each each
	Bridging Ends Lock	<b>BLK100</b> <b>BLK150</b> <b>BLK200</b> <b>BLK250</b>	each each each each
	Bridging Ends Bolted	<b>BB0100</b> <b>BB0150</b> <b>BB0200</b> <b>BB0250</b> <b>BB0HD300</b>	each each each each each
	Bridging Channel	<b>BC69GA</b>	lin metre
	Slotted Channel 2 Hole	<b>BSC2HO 130mm</b>	each
	3 Hole	<b>BSC3HO 190mm</b>	each
	5 Hole	<b>BSC5HO 310mm</b>	each
	General Purpose Bracket	<b>BGPB100GA</b> <b>BGPB150GA</b> <b>BGPB200GA</b> <b>BGPB250GA</b> <b>BGPB300GA</b>	each each each each each
	Angle Connectors	<b>BAC100</b> <b>BAC150</b> <b>BAC200</b> <b>BAC250</b> <b>BAC300</b>	each each each each each
	Clamp Plate	<b>BCP100GA</b> <b>BCP150GA</b> <b>BCP200GA</b> <b>BCP250GA</b> <b>BCP300GA</b>	each each each each each
	Raking Girt Bracket	<b>BRGB100</b>	each
	Adaptor Bracket (Right hand shown)	<b>BAB150100L/RGA</b> <b>BAB200100L/RGA</b> <b>BAB200150L/RGA</b> <b>BAB250100L/RGA</b> <b>BAB250150L/RGA</b> <b>BAB250200L/RGA</b> <b>BAB300100L/RGA</b>	each each each each each each each
	Bridging Starting Clips	<b>BSC100</b> <b>BSC150</b> <b>BSC200</b> <b>BSC250</b>	each each each each

PURLINS & GIRTS – GENERAL ACCESSORIES

Product	Product Details	Code	Unit
<b>Purlins &amp; Girts – Accessories</b>		Purlin Cleat AISC	
		40mm centres	each
		60mm centres	each
		110mm centres	each
		160mm centres	each
		Bridging Fascia Bracket	
		BFB100	each
		BFB150	each
		BFB200	each
		BFB250	each
		BFBHDGA (230/300) Also available in ZAM Coating.	each
		Bolts (Grade 4.6)	
		M12 x 30 N&B Flanged	each
		M16 x 33 N&B Flange	each
		M16 x 45 N, B &W	each
		M12 X 30 Fascia Bolt	each
		M12 X 30 N&B Flanged (GR8.8)	each
		M16 X 30 N&B, 2 washers	each
		NOTE: Bolts & Nuts 100 lots only.	
		C10015 Redback® Beam	each
		C15015 Redback® Beam	each
		C20015 Redback® Beam	each
		C20015 Redback® Beam Pnch	each
		Note: no technical data is available for this product. Lengths: 6.100 metre, 7.620 metre. Available in stock lengths only. Minimum order quantity packs of 20.	

PURLINS STOCK SIZES

Size/Details		C Sections				Z Sections			
		7.0m	10.0m	8.0m	6.0m	8.0m	6.0m	7.0m	9.0m
Cairns	10015			●	●				
	15015			●	●				
	20019			●					
Townsville	10015			●	●				
	15015			●	●				
	20019			●					

Purlins/Girts

Customer \_\_\_\_\_

Project \_\_\_\_\_

Delivery address \_\_\_\_\_

Page \_\_\_\_\_ of \_\_\_\_\_

Order no. \_\_\_\_\_

Delivery date \_\_\_\_\_

SECTION SIZE		NO. REQUIRED			MARK NO.			ELEVATION	
		As drawn							
COATING CLASS		Opp. hand							
NOMINATE HOLE CENTRES	Section size	100	150	200	250	300	350		
	Hole Centre	40	60	110	160	210	210		

OAL

35

70

VIEW

C SECTION\* Z SECTION

Please indicate required section shape.

Broad flange

\* All C sections have 90° flanges. Please check availability of section with your local Stramit office.

Indicate web and flange holes and dimensions from hole to hole. Standard holes: 22mm.

SECTION SIZE		NO. REQUIRED			MARK NO.			ELEVATION	
		As drawn							
COATING CLASS		Opp. hand							
NOMINATE HOLE CENTRES	Section size	100	150	200	250	300	350		
	Hole Centre	40	60	110	160	210	210		

OAL

VIEW

C SECTION\* Z SECTION

Please indicate required section shape.

Broad flange

\* All C sections have 90° flanges. Please check availability of section with your local Stramit office.

Indicate web and flange holes and dimensions from hole to hole. Standard holes: 18 x 22mm.



# Accessories

Customer \_\_\_\_\_


Project \_\_\_\_\_


Delivery address \_\_\_\_\_


Page \_\_\_\_\_ of \_\_\_\_\_


Order no. \_\_\_\_\_


Delivery date \_\_\_\_\_


<div>STARTER CLIP</div> <div></div> <div>Starter (BSC)</div>	PURLIN SIZE	NO. REQ.

<div>GENERAL PURPOSE BRACKET</div> <div></div> <div>(BGPB)</div> <div>A = approx. purlin flange width</div>	PURLIN SIZE	NO. REQ.

<div>ANGLE CONNECTOR</div> <div></div> <div>(BAC)</div>	PURLIN SIZE	NO. REQ.

<div>CLAMP PLATE</div> <div></div> <div>Clamp Plate (BCP)</div>	PURLIN SIZE	NO. REQ.

<div>RAKING GIRT BRACKET</div> <div></div> <div>(BRGB)</div>	To connect 100mm raking girts to fascia purlin		NO. REQ.

	<b>BOLTS</b>			<b>FASCIA BOLTS</b>	
	M12 x 30 Flange G4.6	M16 x 45 B/N/W/ G4.6	M16 x 45 B/N/W G8.8	M12 x 30 B/N/W G4.6	M16 x 30 B/N/W G4.6
NO. REQ'D					

Note: Please check bolt availability with your local Stramit office.



# Bridging – Up the slope

Customer \_\_\_\_\_






















Project \_\_\_\_\_

Delivery address \_\_\_\_\_

Page \_\_\_\_\_ of \_\_\_\_\_

Order no. \_\_\_\_\_

Delivery date \_\_\_\_\_


<b>INTERMEDIATE BRIDGING</b>  Locator / Bolt Part No. BILB  Locator / Lock Part No. BILC  Lock / Bolt Part No. BICB  Lock / Lock Part No. BICC  Bolted / Bolted Part No. BIBB  <small>Note: For Swivel Intermediate Bridging add 'S' to Part Number</small>	PART NO.	PURLIN SIZE	NO. REQ.	PURLIN CTRS	MARK NO.
<b>FASCIA BRIDGING</b>  Locator Part No. BFL*  Lock Part No. BFC*  Bolt Part No. BFB*   Roof Pitch  <small>Fascia Size* 100 150 200 230 250 260 Select Fascia Purlin size and include in Part No.</small>	PART NO.	PURLIN SIZE	NO. REQ.	PURLIN CTRS	MARK NO.
<b>RIDGE BRIDGING</b>  Part No. BRC  Part No. BRL  Part No. BRB					
<b>GIRT STOOL/FOOT</b>  Lock Part No. BGFC  Locator Part No. BGFL  Bolt Part No. BGFB					
<b>GIRT HANGER</b>  Fascia Part No. BGHFL  Barge Part No. BGHBL  Locator Part No. BGHBC  Lock Part No. BGHFC  Bolt Part No. BGHFB  Bolt Part No. BGHBB					



CAIRNS  
TEL (07) 4034 6555  
FAX (07) 4034 6511

TOWNSVILLE  
TEL (07) 4412 3900  
FAX (07) 4412 3909

PRODUCT - ZAM

Product C & Z Purlins	Details	Code	kg/m	M/tonne	BMT (mm)	Unit
	C & Z 10015 Sections	C/Z10015*IZM	2.635	379	1.5	per metre
	C & Z 10019 Sections	C/Z10019*IZM	3.310	302	1.9	per metre
	C & Z 15015 Sections	C/Z15015*IZM	3.562	281	1.5	per metre
	C & Z 15019 Sections	C/Z15019*IZM	4.488	223	1.9	per metre
	C & Z 15024 Sections	C/Z15024*IZM	5.750	174	2.4	per metre
	C & Z 20015 Sections	C/Z20015*IZM	4.534	221	1.5	per metre
	C & Z 20019 Sections	C/Z20019*IZM	5.705	175	1.9	per metre
	C & Z 20024 Sections	C/Z20024*IZM	7.177	139	2.4	per metre
	C & Z 25019 Sections	C/Z25019*IZM	6.466	155	1.9	per metre
	C & Z 25024 Sections	C/Z25024*IZM	8.134	123	2.4	per metre
	C & Z 30030 Sections	C/Z30030*IZM	12.640	79	3.0	per metre

\* Substitute \* for P = PUNCHED U = UNPUNCHED EXP = EXACTA PUNCHED EXU = EXACTA UNPUNCHED  
Check coil availability - extended lead times may apply  
Other sizes and gauges may be available subject to mill lead times and quantities  
Min 1.7m length  
Cutback fee for lengths under 1.7m - item code is CUTBACKLTH

ZAM - the highly corrosion-resistant alternative to hot dipped galvanising

Performance

The corrosion resistance of ZAM coating is a minimum 3 times that of galvanised steel sheet.  
\*Based on results from a comparison test of ZAM coating 380gsm (grams per square metre, nominal coating weight for both sides) with standard galvanised steel Z350gsm.





Typical Application

The superior corrosion resistance of ZAM coating means that it can replace hot dip galvanised steel.  
Applications are whenever severe and corrosive environments exist: intensive farming, agricultural applications, concrete contact and coastal applications.






PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

PRODUCT - ZAM

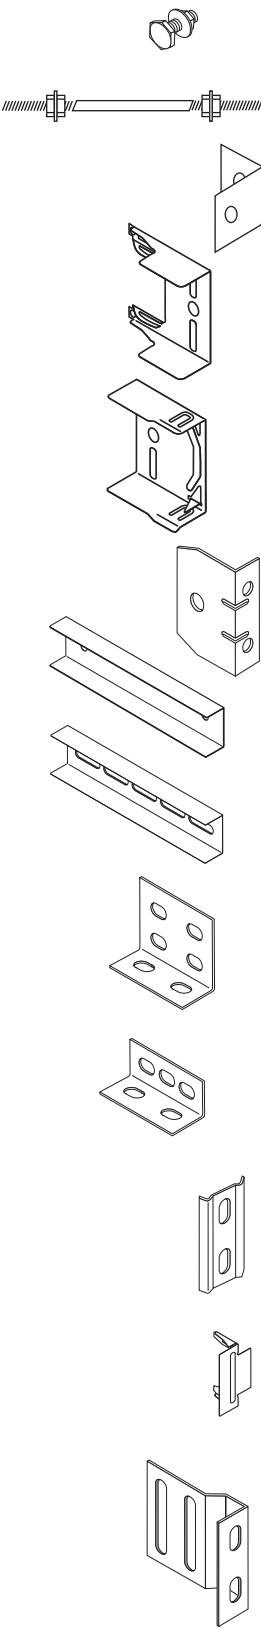
Product Purlins & Girts – AISC Bridging System	Product Details	Code	Unit
***Note: All AISC Bridging & Componentry available for 100-250 section sizes.			
	Intermediate Locator/Lock	BI150LRLKIZM BI200LRLKIZM BI250LRLKIZM	lin metre lin metre lin metre
	Swivel Locator/Lock	BIS150IZM BIS200IZM BIS250IZM	lin metre lin metre lin metre
	Intermediate Lock/Lock	BI150LKLKIZM BI200LKLKIZM BI250LKLKIZM	lin metre lin metre lin metre
	Swivel Lock/Lock	BIS150IZM BIS200IZM BIS250IZM	lin metre lin metre lin metre
	Intermediate Locator/Bolt	BI150LRBOIZM BI200LRBOIZM BI250LRBOIZM	lin metre lin metre lin metre
	Swivel Locator/Bolt	BIS150IZM BIS200IZM BIS250IZM	lin metre lin metre lin metre
	Intermediate Lock/Bolt	BI150LKBOIZM BI200LKBOIZM BI250LKBOIZM	lin metre lin metre lin metre
	Swivel Lock/Bolt	BIS150IZM BIS200IZM BIS250IZM	lin metre lin metre lin metre
	Intermediate Bolt/Bolt	BI150BBOBIZM BI200BBOBIZM BI250BBOBIZM	lin metre lin metre lin metre
	Swivel Bolt/Bolt	BIS150IZM BIS200IZM BIS250IZM	lin metre lin metre lin metre





PRODUCT - ZAM			
Product	Product Details	Code	Unit
	Fascia Locator/Fascia	BF***IZM	lin metre
	Fascia Lock/Fascia	BF***IZM	lin metre
	Fascia Bolt/Fascia	BF***IZM	lin metre
	Fascia Girt Hanger	BGHTB***IZM BGHTB***IZM BGHTB***IZM	lin metre lin metre lin metre
	Barge Girt Hanger	BGHTB***IZM BGHTB***IZM BGHTB***IZM	lin metre lin metre lin metre
	Girt Foot	BGF***IZM BGF***IZM BGF***IZM	lin metre lin metre lin metre



PRODUCT - ZAM			
Product	Product Details	Code	Unit
	Accessories		
	Bolts (Grade 4.6) M12 x 30 N&B Flanged GAL	PB1230GA	each
	Sag Rod 12mm Sag Rod 16mm	BSR12 BSR16	per metre per metre
	Tie Rod Angle	BTRAIZM	each
	Bridging Ends Locator	BLR150IZM BLR200IZM BLR250IZM	each each each
	Bridging Ends Lock	BLK150IZM BLK200IZM BLK250IZM	each each each
	Bridging Ends Bolted	BB0150IZM BB0200IZM BB0250IZM	each each each
	Bridging Channel	BC69IZM	lin metre
	Slotted Channel 2 Hole 3 Hole 5 Hole	BSC2H0IZM BSC3H0IZM BSC5H0IZM	each each each
	General Purpose Bracket	BGPB150IZM BGPB200IZM BGPB250IZM	each each each
	Angle Connectors	BAC150IZM BAC200IZM BAC250IZM	each each each
	Clamp Plate	BCP150IZM BCP200IZM BCP250IZM	each each each
	Bridging Starting Clips	BSC150IZM BSC200IZM BSC250IZM	each each each
	Bridging Fascia Brackets	BFB150IZM BFB200IZM BFB250IZM	each each each



CAIRNS  
TEL (07) 4034 6555  
FAX (07) 4034 6511

TOWNSVILLE  
TEL (07) 4412 3900  
FAX (07) 4412 3909



New high-tech coating for severe environments

Stramit Building Products now offers the next generation of steel purlin and Condeck HP product manufactured from ZAM coated steel.

ZAM® is a technologically advanced coated steel that allows new installation possibilities in corrosive environments. By replacing the need for post-galvanising, ZAM® products also lower material costs and reduce project lead times.

ZAM® coated steel offers better corrosion protection than conventional galvanised steel (around three times the design life) at a lower cost than products with comparable performance.

ZAM® products perform well in salt or marine atmospheres and are superior to galvanised steel in acid rain, sulphur dioxide or ammonia conditions. They also perform well in alkaline environments. They are appropriate for use near marine environments, in enclosed swimming pool complexes, in poultry, cattle and pig shed environments, as well as in high industrial environments.

The superior scratch resistance of ZAM® products helps corrosion resistance in applications subject to repeated wear. ZAM® coated steel is also concrete compatible, making it an ideal material for steel formwork decking products.

ZAM® is offered by Stramit Building Products with up to a 20 year warranty, subject to standard terms an conditions. Call Stramit Building Products for more information.

ZAM HIGH DURABILITY PURLINS

Product C & Z Purlins	Details	Code	kg/m	M/tonne	BMT (mm)	Unit
	C & Z 10015 Sections	C/Z10015*IZM	2.635	379	1.5	per metre
	C & Z 10019 Sections	C/Z10019*IZM	3.310	302	1.9	per metre
	C & Z 15015 Sections	C/Z15015*IZM	3.562	281	1.5	per metre
	C & Z 15019 Sections	C/Z15019*IZM	4.488	223	1.9	per metre
	C & Z 15024 Sections	C/Z15024*IZM	5.750	174	2.4	per metre
	C & Z 20015 Sections	C/Z20015*IZM	4.534	221	1.5	per metre
	C & Z 20019 Sections	C/Z20019*IZM	5.705	175	1.9	per metre
	C & Z 20024 Sections	C/Z20024*IZM	7.177	139	2.4	per metre
	C & Z 25019 Sections	C/Z25019*IZM	6.466	155	1.9	per metre
	C & Z 25024 Sections	C/Z25024*IZM	8.134	123	2.4	per metre
	C & Z 30030 Sections	C/Z30030*IZM	12.640	79	3.0	per metre

\* Substitute \* for P = PUNCHED U = UNPUNCHED EXP = EXACTA PUNCHED EXU = EXACTA UNPUNCHED  
Check coil availability - extended lead times may apply  
Other sizes and gauges may be available subject to mill lead times and quantities  
Min 1.7m length  
Cutback fee for lengths under 1.7m - item code is CUTBACKLTH

**Purlins Ordering** Available to order on approximately 3-5 days lead time subject to delivery days. No extra charge for hole punching  
Notching and mitre cut charges do apply – POA. Allow 2 extra days.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

ZAM Durability Statement  
(Date of issue 15 June 2004)

This statement is issued to Stramit® Building Products Pty Ltd by Nisshin Steel Co., Ltd on 15 June 2004 and states the expected durability of Nisshin Steel Co., Ltd corrosion resistant hot dip coated steel sheeting product ZAM™.

Performance

The corrosion resistance of ZAM coating is a minimum 3 times that of galvanised steel sheet.  
ZAM materials are made in accordance with AS 1397, purlins have a ZM350 coating and Condeck HP a ZM275 coating of protective, zinc, aluminium and magnesium. All ZAM products have the same material strength as normal product, and the normal purlin and Condeck HP load tables are valid when used with the ZAM material.

Typical Application

The superior corrosion resistance of ZAM coating means that it can replace hot dip galvanised steel.  
Applications are whenever severe and corrosive environments exist: intensive farming, agricultural applications, concrete contact and coastal applications.

ZAM, the highly corrosion-resistant hot dip coated steel sheet, is

- A new hot dip coated steel that has a coating layer of zinc, aluminium 6% and magnesium 3%
- The designation “ZAM” comes from the initials of its constituent elements Zinc, Aluminium, and Magnesium.

CUSTOM SECTIONS

Stramit® Custom Sections

GENERAL

At the forefront of technology, Stramit has designed the latest in computer technology roll forming equipment. This technology allows quick and easy profile changes to be made within the production cycle. This allows the production of special purlins or other shapes designed specifically for individual projects giving the best balance in performance and economy.

SIZE RANGE

Sections can be produced within the following parameters:

Web size	100mm	–	400mm
Flange size	30mm	–	130mm
Lip size	9mm	–	35mm *
Thickness	1.0mm	–	3.0mm
Material type	G300	–	G550 #

\*Zero lip (i.e. plain channels) also available.

# May vary dependent upon material thickness.

MODIFIED PURLINS

Modified purlins, Z, C or plain channel, use existing strip widths. This advantage of modifying sections within the bounds of existing strip materials allows improvements in performance – either strength or deflection – with ready access to available materials.

Lead times are, particularly if standard flange sizes are used, no more than for normal purlin orders.

CUSTOM SHAPES

Designed for specific purposes, these sections may be used for a variety of applications but usually require a specific strip size, which requires extended lead times for ordering and are subject to a minimum order quantity criteria.

TOOLING

Contact your local Stramit office for cost estimates for tooling of special flange sizes and any special holes.

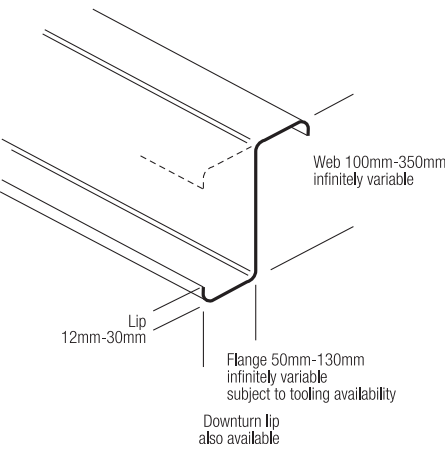
HOLES

The facility to provide special holes at almost any location is also available.

LOAD TABLES

Section properties and load tables for modified or custom profiles may be possible for larger projects by means of the latest in computer programs written for this purpose.

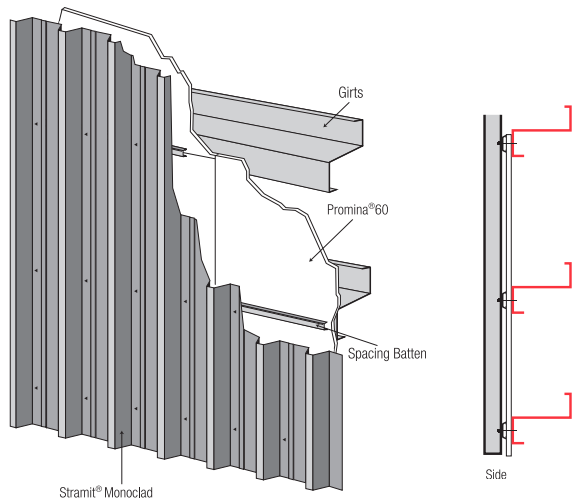
SIZES AVAILABLE



**DOWNTURN LIP – Standard & Lapped Z**  
These features are available on purlin projects – POA

**Custom Sections** Subject to special enquiry – POA. They are cut to length, custom punched from galvanised material. Alternative materials are available upon request.






## STRAMIT UNIGUARD™ FIRE RESISTING WALL SYSTEM






**Stramit Uniguard™ Fire resisting wall system** is a superior fire rated wall cladding product that combines the single layer of specialist fireboard **Promina®60** with your choice from **Stramit Monoclad®**, **Stramit Corrugated®** and **Stramit Longspan®** wall cladding products.

The **Stramit Uniguard™ Fire resisting wall system** is suitable for an external wall system for single storey Class 7b and 8 buildings of Type C construction as defined in the Building Code of Australia (BCA96).

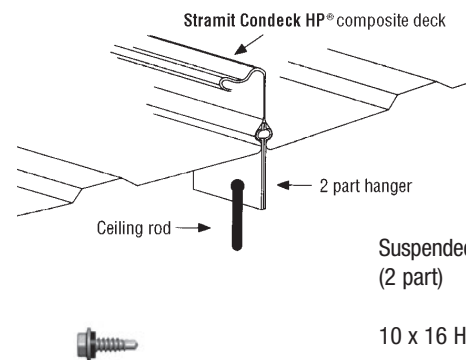
Note: System must be designed and installed strictly in accordance with **Stramit Uniguard™ Fire Resisting Wall System Technical Manual**.

Product	Size mm	Code	BMT mm	Unit
<b>Promina®60</b>				
	15 x 2400 x 1200	<b>PB601224</b>		each
<b>Stramit® Ceiling Battens</b>				
	Stock length 6100 20 x 30 x 10 x 6.1m	<b>CBPR61</b>	0.42	per length
<b>Note: Zinc-aluminium alloy Battens cannot be in contact with this system.</b>				
<b>Fasteners</b>				
	10 x 40 Wing Tek (For fixing Promina®60 to girts)	<b>S1040WNGT</b>		per box 500
	12 x 55 Hex Head (For pan fixing cladding to purlin/girts)	<b>S1255HT4</b>		per box 1000
<b>Eave Filler Strips and Fire Mastic</b>				
	Infill Strips (Top) (Bottom)	<b>MCEFSTOP</b> <b>MCEFSBOT</b>	0.970m 0.970m	each each
	Promaseal Fire Mastic	<b>PBSEAL300</b>		per 300ml tube

## FORMWORK • ACCESSORIES

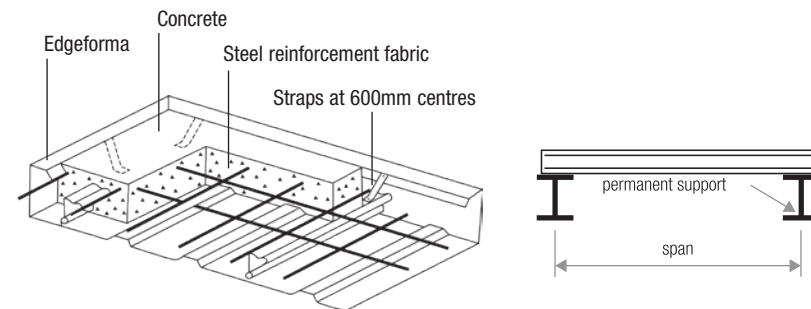
Product	Product Details	Code	Finish	BMT mm	Unit
<b>Stramit Condeck HP®</b> 		<b>CONHP75GA</b>	GA	0.75	per m <sup>2</sup>
		<b>CONHP100GA</b>	GA	1.00	per m <sup>2</sup>
	NOTE: Now manufactured in Brisbane – 48 hour lead time. Minimum length 800mm.				
		<b>CONHP100IZM</b>		1.00	per m <sup>2</sup>
<b>Stramit Condeck HP® ZAM coating</b> 					
NOTE: Please see page 60 for ZAM material details.					
<b>Stramit Edgeforma</b> 	100mm <b>Stramit® Edgeforma</b> cut to length max 8m	<b>CONEF100GA</b>	GA	1.0	lin metre
	125mm <b>Stramit® Edgeforma</b> cut to length max 8m	<b>CONEF125GA</b>	GA	1.0	lin metre
	150mm <b>Stramit® Edgeforma</b> cut to length max 3.6m	<b>CONEF150GA</b>	GA	1.5	lin metre
	* <b>Edgeforma</b> can be custom made to slab height. Allow 5 working days for delivery.				
	50 - 125mm: cut to length 8m max. 126 - 200mm: cut to length 3.6m max.				

### Accessories



Suspended Ceiling Clips Hanger (2 part)	<b>CONEHANG</b>	GA	each
10 x 16 Hex Tek	<b>S1016HT4</b>	Plain	per 1000

Single Span maximum span (mm)		
slab thickness (mm)	Stramit Condeck HP® decking thickness	
	0.75mm	1.00mm
90	2100	2450
100	2040	2380
110	1990	2310
120	1940	2250
125	1920	2220
130	1900	2200
140	1860	2150
150	1820	2100
160	1780	2060
170	1750	2020
180	1720	1990
190	1690	1960
200	1660	1920
210	1610	1890
220	1600	1870
230	1580	1840
240	1560	1820
250	1540	1790



### Span tables for temporary props

Calculated for concrete density of 2400 kg/m<sup>3</sup>, reo mass 50 kg/m<sup>3</sup>, stacked material load of 1.5kPa in pans, 100mm wide prop bearers and rib deflection limit of span/240. Maximum spans for finished composite slabs must be checked using the **Stramit Condeck HP® Technical Manual** or the **Stramit Condeck HP™ Slab Designer** software. Props or propping frames must be spaced approximately equally within the span.

— Cases below this line not recommended for exposed ceilings









## FLOORING • ACCESSORIES

Product Flooring/Accessories	Details	Code	BMT mm	Unit
	Bearers	<b>Stramit® Flooring – Joists</b>		
		<b>J11510</b>	1.0	per metre
		<b>J11512</b>	1.2	per metre
		<b>J11515</b>	1.5	per metre
		<b>J11519</b>	1.9	per metre
		<b>J18212</b>	1.2	per metre
		<b>J18215</b>	1.5	per metre
		<b>J18219</b>	1.9	per metre
		<b>J18224</b>	2.4	per metre
		<b>J23512</b>	1.2	per metre
		<b>J23515</b>	1.5	per metre
		<b>J23519</b>	1.9	per metre
		<b>J23524</b>	2.4	per metre
		<b>J28319</b>	1.9	per metre
		<b>J28324</b>	2.4	per metre
		<b>B11519</b>	1.9	per metre
		<b>B18219</b>	1.9	per metre
		<b>B23519</b>	1.9	per metre
		<b>B28319</b>	1.9	per metre
		<b>B18224</b>	2.4	per metre
		<b>B23524</b>	2.4	per metre
		<b>B28324</b>	2.4	per metre
	Angle Brackets	<b>FCB1A</b> (for B182)		each
		<b>FCB1B</b> (for B235/283)		each
		<b>FCB3A</b> (for B182)		each
		<b>FCB3B</b> (for B235/283)		each
	Web Brackets	<b>FCB3A</b> (for B182)		each
		<b>FCB3B</b> (for B235/283)		each

## VERMASEAL

Product Flooring/Accessories	Details	Code	BMT mm	Unit
<b>Stramit® Flooring</b> Vermaseal	Vermin and weatherproof flashing	<b>VMSEALGRY30</b> Grey (3 metre lengths)		length

## HOME IMPROVEMENTS FENCING • ACCESSORIES







Product	Product Details	Code	Finish	BMT mm	Unit
<b>Infill Sheets</b> 	Gram ColourLine Sheet				
	Sheeting 1.190	<b>SFGLCL***1190</b>	COL	0.35	each
	Sheeting 1.490	<b>SFGLCL***1490</b>	COL	0.35	each
	(To be used with Lattice for 1.800 Fence)				
	Sheeting 1.790	<b>SFGLCL***1790</b>	COL	0.35	each
	Sheeting 2.090	<b>SFGLCL***2090</b>	COL	0.35	each
	(To be used with Lattice for 1.800 Fence)				
<b>NB: Colours available – Caulfield Green, Heritage Red, Mist Green &amp; Primrose</b>					
Not a stocked item - 10 day leadtime.					
<b>Rails Top &amp; Bottom</b> 	Rail Top/Bottom 2.365	<b>SFR***2365</b>	COL	0.90	each
	Rail Top/Bottom 3.100	<b>SFR***3100</b>	COL	0.90	each
<b>NB: Colours available – Domain, Meadow, Evergreen, Red Oak, Eclipse &amp; Bluestone</b>					
<b>Post</b> 	Post 2.400 ( 40 x 40 )	<b>SFP***2400</b>	COL		each
	<b>NB: Colours available – Domain, Meadow, Evergreen, Red Oak, Eclipse &amp; Bluestone</b>				
<b>Panel 2.400 x 1.800</b> 	<b>Standard Panel</b> includes		<b>Panel price with Lattice</b> (Domain only)		
	2 x Rails (2.365)		4 x Rails (2.365)		
	2 x Posts		2 x Post		
	3 x Sheets 1.790		3 x Sheets 1.490		
	14 x Screws 10x16 Hex HD		1 x Lattice 300x2355 (Domain)		
		18 x Screws 10x16 Hex HD			
<b>Accessories</b> 	Screws 10 x 16 Hex Hd (No Neo) (per 100 only)	<b>S1016HTNN***H</b> <b>S1016HT***H</b>	Colour		pack 100
	7 panels = 100 screws		Colour		pack 100
<b>Lattice</b> 	Lattice 300 x 2355	<b>SFL300DOM2350</b>	Colour		each
	<b>NB: Available in Domain only</b>				
<b>Not a stocked item - 10 day leadtime.</b>					
<b>Corner (End) Post</b> 	Post 2.400 50 x 50 (with cap)	<b>SFGP50***2400</b>	Colour		each
	<b>NB: Colours available – Domain, Meadow, Evergreen, Red Oak, Eclipse &amp; Bluestone</b>				
<b>Gates</b> To suit 1800 Fence 	<b>Single Gate</b> 1.800 x 900				each
	includes				
	2 x Styles, 2 x 100x75 Butt Hinges, 1 x Long D-Latch,				
	2 x 50x50 Post, 1 x Rail 2.400,				
	1 x Sheet, 50 x 12 x 20 Hex Head				
	<b>Double Gate</b> 1.800 x 3000				each
	includes				
4 x Styles, 4 x 100x75 Butt Hinges, 1 x Long D-Latch,					
1 x Drop Bolt, 2 x 50x50 Post, 2 x Rail 3.100,					
4 x Sheet, 100 x 12 x 20 Hex Head.					
<b>Not a stocked item - Allow 10 days lead time.</b>					
<b>Colour Conversion</b>	Primrose (PRM) / Domain (DOM) = Classic Cream™		Heritage Red (HRD) / Red Oak (ROK) = Manor Red®		
	Caulfield Green (CFG) / Evergreen (EVG) = Cottage Green®		Mist Green (MGN)/Meadow (MDW)=Pale Eucalypt®		
	Bluestone (BST) = Deep Ocean®		Eclipse (ECL) = Night Sky®		

















CAIRNS  
TEL (07) 4034 6555  
FAX (07) 4034 6511

TOWNSVILLE  
TEL (07) 4412 3900  
FAX (07) 4412 3909

SUNSET PATIO DECK				
Product	Product Details	Code	BMT mm	Unit
	Sunset Decking CLC/Classic Cream™ 80GL	SS42DLCLC		per m²
	Sunset Decking WIL/Classic Cream™ 80GL	SS42DL07		per m²
	Sunset Decking SUR/Dover White 80GL	SS42DL05		per m²
	Sunset Decking PPB/Paperpark® 80GL	SS42DLPPB		per m²
	Sunset Decking WDG/Classic Cream™ 80GL	SS42DL09		per m²
		CUTBACKLTH ( 0.5 - 1.2m )		each
To convert prices to linear metres multiply by cover of sheet (ie 0.290). Supply ex Erskine Park. **Gloss colour is on the bottom. Please confirm at time of order. <b>All Product packaged for maximum protection.</b> *Maximum length 9.0m.				
Fibreglass	To suit Stramit Sunset® sheeting (available in opal only)	TSFGSS240PA		lin metre
				
Sunset® Foam Insert	Infill strip for Stramit Sunset® sheeting ( 310mm )	SSWS3787		each
				
Fibreglass Foam Insert	Infill strip for Stramit Sunset® fibreglass sheeting ( 290mm )	SSWS3788		each
				
Sunset® Back Channel	Available in 3 & 5.0m stock lengths only	RCSSH***30		each
		RCSSH***50		each
		RCSSZA30		each
		RCSSZA50		each
	***Available colours CLC, DVW & PPB.			
Sunset® Foam Insert for Back Channel	Available in 5.0m stock lengths only	SSBCFI5000		each
Fasteners	10 x 16 Hex Head SDS (for fixing to steel)	S1016HT4H	Plain	per pack 100
		S1016HT4	Plain	per pack 1000
		S1016HT***4H	Colour	per pack 100
		S1016HT***4	Colour	per pack 1000



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

PATIO ROOF DECKING				
	Details	Ordering Code	Finish	Unit
	Collar Tie Bracket 15deg	CSCTB10015GA	GA	each
	Collar Tie Bracket 15deg	CSCTB15015GA	GA	each
	Collar Tie Bracket 15deg	CSCTB20015GA	GA	each
	Collar Tie Bracket 22deg	CSCTB10022GA	GA	each
	Collar Tie Bracket 22deg	CSCTB15022GA	GA	each
	Collar Tie Bracket 22deg	CSCTB20022GA	GA	each
	Angle Bracket	CSAB100GA	GA	each
	Angle Bracket	CSAB150GA	GA	each
	Angle Bracket	CSAB200GA	GA	each
	Sunset Support Post 65 x 65 x 2.440	SSP6516GA2440	GA	each
		SSP6516***2440	LCLC/HDVW/LPPB	each
	Sunset Support Post 65 x 65 x 3.660	SSP6516GA3660	GA	each
		SSP6516***3660	LCLC/HDVW/LPPB	each
	Sunset Support Post 90 x 90 x 3.000	SSP9020GA3000	GA	each
		SSP9020***3000	LCLC/HDVW/LPPB	each
*Posts stocked at Erskine Park – 48 hour leadtime. Other colours available check leadtime at time of order.				
	Free Standing Post Connector 65 x 65	SSPCFS6565GA	GA	each
	Free Standing Post Connector 90 x 90	SSPCFS9090GA	GA	each
	Post Connector 65 x 65	SSPC6565GA	GA	each
	Post Connector 90 x 90	SSPC9090GA	GA	each
	Post Skirt 65 x 65	SSPS6565		each
	Post Skirt 90 x 90	SSPS9090		each
	Sunset Box Gutter Support Bracket	SSBGSB		each
	Patio Rafter Bracket	PRBGA		each
	Sunset Box Bracket	SSRBAL	ALUM	each

## TAUREAN® RESIDENTIAL AND COMMERCIAL ROLLER DOOR COLOURS

COLORBOND® STEEL NAMES							
BAS	Basalt®	HED	Headland®	PPB	Paperbark®		
CLC	Classic Cream™	IST	Ironstone®	SHG	Shale Grey™		
CTG	Cottage Green®	JAS	Jasper®	SUR	Surfmist®		
COV	Cove®	MGV	Mangrove®	TRN	Terrain®		
DOC	Deep Ocean®	MNR	Manor Red®	WAL	Wallaby®		
DUN	Dune®	MON	Monument®	WDG	Woodland Grey®		
EVH	Evening Haze®	NTS	Night Sky®	WIL	Wilderness®		
GLY	Gully®	PEC	Pale Eucalypt®	WSP	Windspray®		
MATT		COLOURGRAIN		SELF-STORAGE / MINI WAREHOUSE			
BAS	Basalt® Matt	CAO	Caoba®	DVW	Dover White	MAN	Mandarin Orange
MON	Monument® Matt	CCE	Classic Cedar®	LAZ	Lazurite Blue	POP	Poppy Red
SUR	Surfmist® Matt						

## TAUREAN RESIDENTIAL ROLLER DOORS

## DOMESTIC PR1ME SERIES 'A' AND 'AA', WINDLOCK AND WINDSTRONG

Product Details	Discount Group Code	Finish	Code	Unit
Series A - Standard, WindLock or WindStrong options	7T	ZA	RDAZA	Ea
		COL	RDAAhCOLwww	Ea
Series AA - Standard, WindLock or WindStrong options	7V	ZA	RDAAZA	Ea
		COL	RDAAhCOLwww	Ea

Available in ZINCALUME® steel, COLORBOND® steel, COLORBOND® steel Matt and Colourgrain Domestic Roller Door										
Series 'A' Doors (curtain width in mm)							Series 'AA' Doors (curtain width in mm)			
	Width									
Height (mm)	750 to 1550	1551 to 1850	1851 to 2550	2551 to 2800	2801 to 3100	3101 to 3430	3431 to 3750	3750 to 4350	4351 to 5100	5101 to 5400
1200										
2200										^
2500										^
2800										
3100										

^ Not available in WindLock

ORDERS TO BE PLACED AS DOOR SIZE (not opening width)

To calculate curtain width, add to opening width -

• 50mm for Series A

• 100mm for WindLock option

• 100mm for Series AA

• 110mm for WindStrong option

## TAUREAN LIGHT INDUSTRIAL ROLLER DOORS

## LIGHT INDUSTRIAL COMMANDO SERIES 'B', WINDLOCK AND WINDSTRONG

Product Details	Discount Group Code	Finish	Code	Unit
Series 'B' - Standard, WindLock or WindStrong options	7R	ZA	RDBZA	Ea
		COL	RDBCOL	Ea

Available in ZINCALUME® steel, COLORBOND® steel, COLORBOND® steel Matt and Colourgrain Domestic Roller Door										
Series 'B' Doors (curtain width in mm)										
	Width									
Height (mm)	750 to 1550	1551 to 1850	1851 to 2550	2551 to 2800	2801 to 3100	3101 to 3430	3431 to 3750	3750 to 4350	4351 to 5100	5101 to 5400
2200										
2500										
2800										
3100										
3500										
3900										
4300										
4600										
5100										

ORDERS TO BE PLACED AS DOOR SIZE (not opening width)

To calculate curtain width, add to opening width -

• 50mm for Series A

• 100mm for WindLock option

• 100mm for Series AA

• 110mm for WindStrong option

Product Details	Code	Unit
Planetary Gear Chain System It is recommended that Planetary Gear Chain operating system be fitted to doors in shaded areas. Planetary Gear system MUST NOT be used when an electric operator is fitted.	RDPLANETGEAR	Ea

## TAUREAN® RESIDENTIAL ROLLER DOORS - KEY POINTS

PR1ME SERIES ROLLER DOOR WINDLOCK CONFIGURATION					Wind Classification N3		MAXIMUM DOOR WIDTH (mm)		
Wind Classification (AS/NZS 4505-2012)		MAXIMUM DOOR WIDTH (mm)					0 - 3650	3651 - 5015	5016 - 5100
Classification	Ultimate Wind Pressure	0 - 3650	3651 - 5015	5016 - 5100	ABUTMENT FORCES (kN/m)	Fy INWARDS	5.5	6.2	8.2
N1	< 4.0m: inwards 0.69kPa outwards -0.73kPa > 4.0m: inwards 0.69kPa outwards -0.63kPa	WindLock door 2.2 clips/m				Fx INWARDS	17.7	22.7	29.4
N2	< 4.0m: inwards 0.95kPa outwards -1.02kPa > 4.0m: inwards 0.95kPa outwards -0.87kPa					Fy OUTWARDS	9.5	9.5	11.2
N3	< 4.0m: inwards 1.49kPa outwards -1.59kPa > 4.0m: inwards 1.49kPa outwards -1.37kPa					Fx OUTWARDS	26.3	30.7	40.7
			3.9 clips/m	4.1 clips/m					

Taurean Doors Systems certify that this door meets the ultimate wind pressure ratings of Australian Standard AS/NZS 4505 and is fit for purpose in Regions A and B (non-cyclonic areas) of Australia when installed according to instructions.  
See taureands.com.au for details.

## Tapers for Sloping Floors – Roller Doors

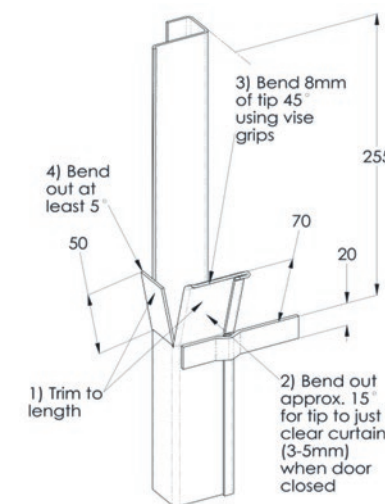
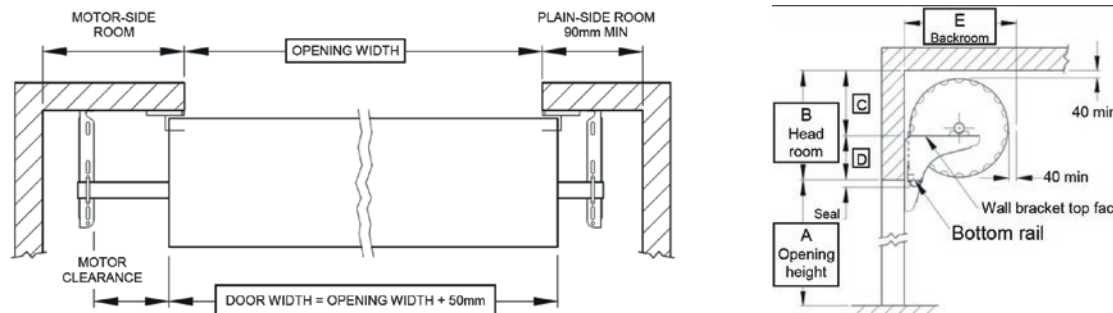
Taurean Pr1me Series Roller Doors are available with tapered curtains to suit floors with a slope across the door opening. Minimum and maximum taper sizes apply, please contact Taurean Customer Service on 1800 778 658 or via customerservice@taureands.com.au for further information.

## WINDSTRONG™ Roller Door - Domestic and Medium General Purpose (20,000 cycles) AUSTRALIAN STANDARD 4505 COMPLIANT

Steel Guide Track	ULTIMATE CYCLONIC WIND PRESSURE								Aluminium Guide Track	ULTIMATE CYCLONIC WIND PRESSURE							
Door Width (mm)	2550	2800	3100	3430	3750	4350	5100	5400	Door Width (mm)	s 2550	2800	3100	3430	3750	4350	5100	5400
Inwards Ultimate Wind Pressure Rating (kPa)	6.27	5.76	5.20	4.64	4.17	3.46	2.89	2.76	Inwards Ultimate Wind Pressure Rating (kPa)	6.79	6.13	5.53	4.91	4.38	3.53	2.75	2.53
Outwards Ultimate Wind Pressure rating (kPa)	7.24	6.91	6.50	6.02	5.54	4.59	3.31	2.77	Outwards Ultimate Wind Pressure rating (kPa)	6.79	6.13	5.53	4.91	4.38	3.53	2.75	2.53
Domestic Cyclonic Region Ratings (door width mm)	C4 up to 2770		C3 up to 3660		C2 up to 5100		C2 up to 5400		Domestic Cyclonic Region Ratings (door width mm)	C3 up to 3430				C2 up to 4550		C1 up to 5400	

## TAUREAN ROLLER DOOR INSTALLATION

For further information please refer to the Installation Guides at [www.taureands.com.au](http://www.taureands.com.au) or contact Customer Service 1800 778 658.



Mounting Room - Series A					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
1200	430	265	165	450	
2200	440	270	170	475	
2500	455	275	180	495	
2800	485	295	190	505	
3100	495	300	195	515	

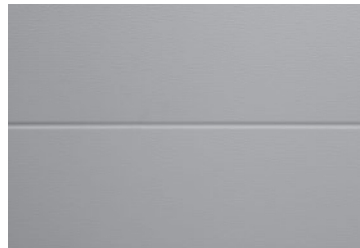
Mounting Room - Series B					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
2200	440	270	170	485	
2500	455	275	180	505	
2800	485	295	190	515	
3100	495	300	195	525	
3900	515	310	205	545	
4600	550	325	225	575	
5100	560	330	230	585	

Mounting Room - Series AA					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
1200	430	265	165	460	
2200	440	270	170	485	
2500	455	275	180	505	
2800	485	295	190	515	
3100	495	300	195	525	

Mounting Room - NovaTaur Commercial					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
2500	485	290	195	500	
3100	520	310	210	540	
3400	520	310	210	540	
4300	555	330	225	575	
5100	585	345	240	610	

Mounting Room - NovaTaur Residential					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
2500	455	290	165	450	

## TAUREAN® RESIDENTIAL SECTIONAL DOORS - CLASSIC RANGE



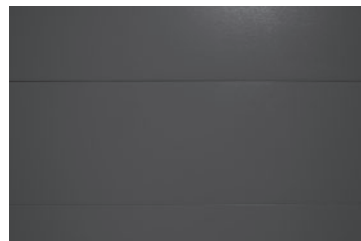
**Linea:** Grooved / Lined



**Tempo:** Pressed Squares



**Western:** Pressed Rectangles



**Silk:** Flat Panels

AVAILABLE IN WOODGRAIN STANDARD COLORBOND® STEEL, WOODGRAIN TIMBERGRAIN & WOODGRAIN POWDERCOATED COLOURS

Height	# Panels	WIDTH										
		1820 to 2500	2501 to 2800	2801 to 3200	3201 to 3700	3701 to 4150	4151 to 4450	4451 to 4740	4741 to 4950	4951 to 5510	5511 to 5930	5931 to 6050
1920, 1940, 1960, 1980, 2000, 2020, 2040, 2060, 2080, 2100, 2120, 2140, 2160, 2180	4											
2200, 2225, 2250, 2275	5											
2300, 2325, 2350, 2375, 2400, 2425, 2450	5											
2475, 2500, 2525, 2550, 2575, 2600, 2625, 2650, 2675, 2700, 2725	5											
2760, 2790, 2820, 2850, 2880, 2910, 2940, 2970, 3000	6											

### Tapers for Sloping Floors – Classic Sectional Doors

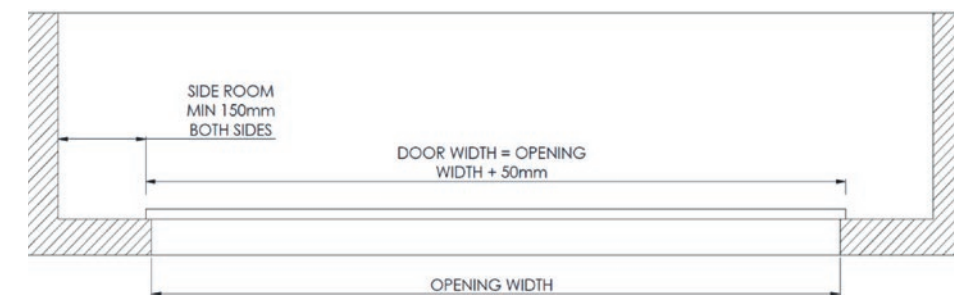
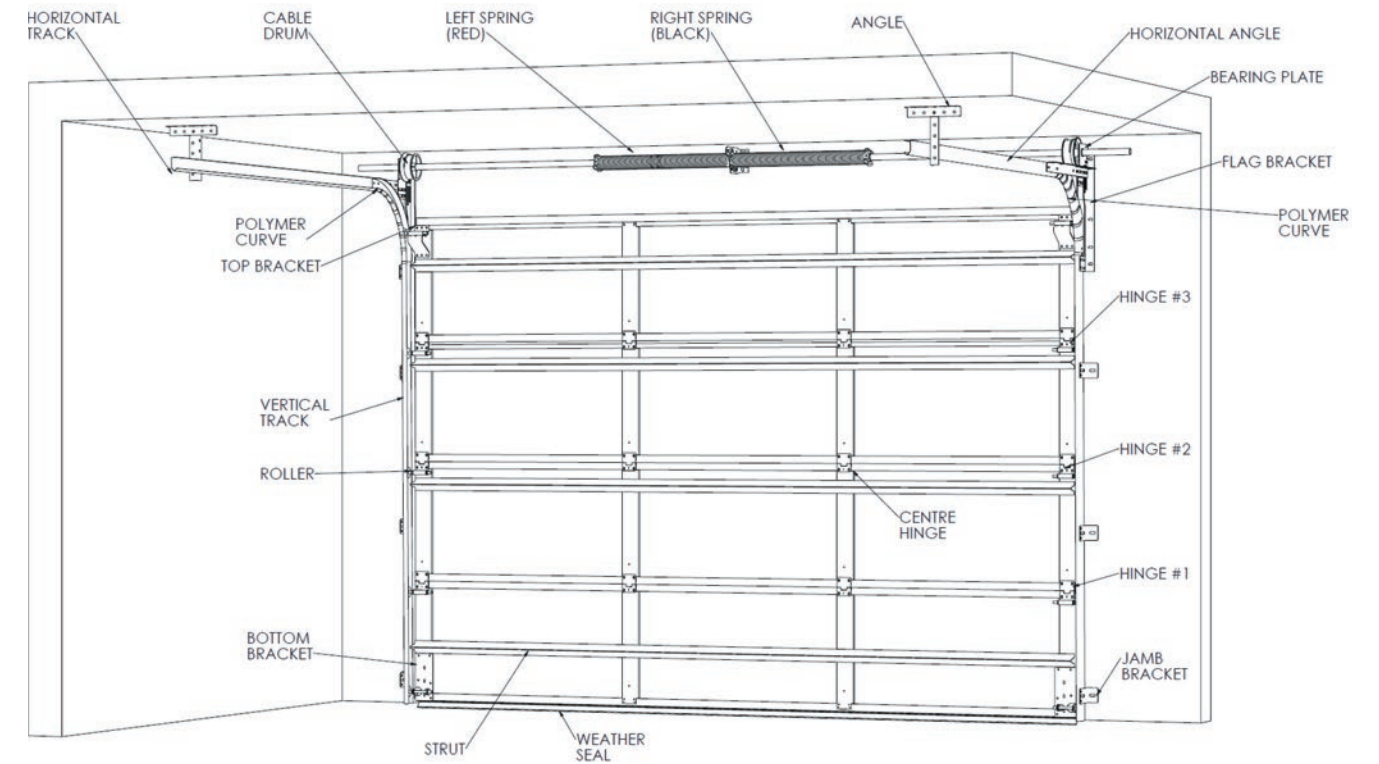
Taurean Classic Sectional Doors are available with a tapered bottom panel to suit floors with a slope across the door opening. Minimum and maximum taper sizes apply, please contact Taurean Customer Service on 1800 778 658 or via [customerservice@taureands.com.au](mailto:customerservice@taureands.com.au) for further information.

### LOW HEADROOM KIT- FRONT MOUNTED ONLY - MINIMUM HEADROOM 2200mm

Product Details	Length	Code	Unit
SD Track Pair LHR 2.591	2591	SDTPRLHRGA2591	Ea
SD Track Pair LHR 2.895	2895	SDTPRLHRGA2895	Ea
SD Track Pair LHR 3.200	3200	SDTPRLHRGA3200	Ea
SD Track Kit Bag LHR		SDTKITBLHR	Ea

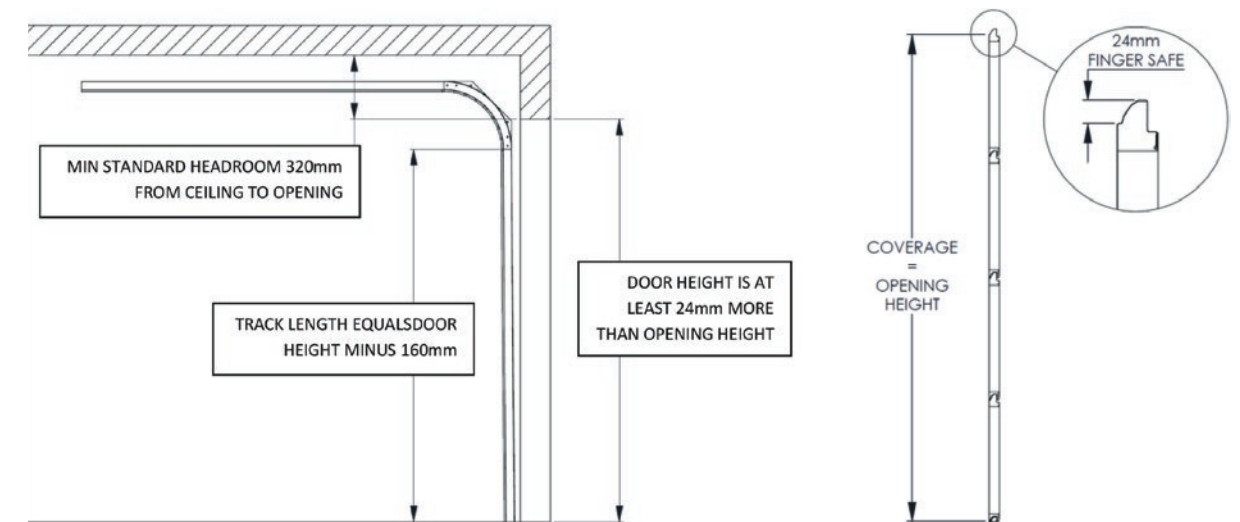
Please refer to the Taurean website ([www.taureands.com.au](http://www.taureands.com.au)) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.

## TAUREAN® RESIDENTIAL SECTIONAL DOOR INSTALLATION - KEY POINTS



**Check opening height and door size.**

- 25-30mm overlap on each side and >10mm at top.
- At least 150mm side room required.



Please refer to the Taurean website ([www.taureands.com.au](http://www.taureands.com.au)) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.



## TAUREAN® NOVATAUR ROLLER DOORS

### Taurean NovaTaur Residential Roller Door

Product Details	Finish	Code	Unit
Taurean Novataur Residential Roller Door	Col	RNR25COLwww	Ea

COLORBOND® steel Colours												
Width												
Height (mm)	2500 to 2550	2551 to 2800	2801 to 3100	3101 to 3600	3601 to 3750	3751 to 4100	4101 to 4350	4351 to 4800	4801 to 5100	5101 to 5400	5401 to 5500	5501 to 6000
2500												

### Taurean NovaTaur Commercial Roller Door

Product Details	Finish	Code	Unit
Taurean Novataur Commercial Roller Door	ZA	RNChhZAwwww	Ea
	Col	RNChhCOLwww	Ea

Width								
Height (mm)	2500 to 2800	2801 to 3100	3101 to 3430	3431 to 3750	3751 to 4350	4351 to 51000	5101 to 5500	5501 to 6000
2500								
3100								
3400								
4300								
5100								

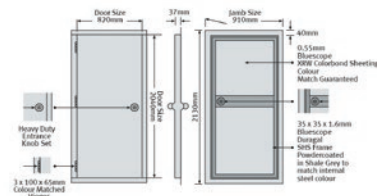
Product Details	Code	Unit
Planetary Gear Chain System	RDPLANETGEAR	Ea
It is recommended that Planetary Gear Chain operating system be fitted to doors in shaded areas.		
Planetary Gear system MUST NOT be used when an electric operator is fitted.		

### TAUREAN ROLLER DOOR PACKAGING OPTIONS

Packaging Product Details	Code	Unit
Cardboard Box up to 3430 door width	RDCHRGPACK9	Ea
Cardboard Box up to 3710 door width	RDCHRGPACK10	Ea
Cardboard Box up to 4930 door width	RDCHRGPACK19	Ea
Enviropack 1 single layer cardboard outer up to 3430mm door width	RDCHRGPACK15	Ea
Enviropack 1 single layer cardboard outer up to 3431 - 5400mm door width	RDCHRGPACK16	Ea
Enviropack 2 double layer cardboard outer up to 3430mm door width	RDCHRGPACK17	Ea
Enviropack 2 double layer cardboard outer up to 3431 - 5400mm door width	RDCHRGPACK18	Ea
Metal Wrap Packaging per lineal metre	RDCHRGPACK2	Ea


### TAUREAN PERSONAL ACCESS (PA) DOOR

Pre-Hung Personal Access Door



Pre Hung PA Door 2040 x 820mm	ZA	PADJ2040820ZA	Ea
	COL	PADJ2040820X***	Ea
Pre Hung PA Door 2040 x 920mm	ZA	PADJ2040920ZA	Ea
	COL	PADJ2040920X***	Ea

Standard Personal Access Door



Personal Access (PA) Door 2040 x 820mm	ZA	PAD2040820ZA	Ea
	COL	PAD2040820X***	Ea
Personal Access (PA) Door 2040 x 920mm	ZA	PAD2040920ZA	Ea
	COL	PAD2040920X***	Ea

### SPECIFICATIONS

- Taurean Door Systems standard offer is a single skin metal clad door: 2040mm high x 820mm wide x 37mm thick and 2040mm high x 920mm wide x 37mm thick
- Metal cladding is 0.55mm thick COLORBOND® steel
- Outward swing is standard
- Heavy duty Knob/Knob Lockset as standard (with Pre-Hung Door only), Lever/Knob available upon request
- Chrome cabin hook supplied as standard (with Pre-Hung Door only)
- Pre-Hung version comes with three, 100 x 65 x 2mm high quality colour matched hinges

Please refer to the Taurean web-site ([www.taureands.com.au](http://www.taureands.com.au)) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.

## TAUREAN® ROLLER DOOR ACCESSORIES

Product Details	Code	Unit
-----------------	------	------

### Roller Door Openers - Merlin

RD Motor SilntDrv Elite 855BBU.....	RDMOTORSE855BB	Ea
Max door area = 18m <sup>2</sup>		
Max door weight = 120kg		

RD Motor SilntDrv Elite 855MYQ.....	RDMOTORSE855MQ	Ea
Max door area = 18m <sup>2</sup>		
Max door weight = 120kg		

RD Motor SilntDrv Essen 655MYQ .....	RDMOTORSS655MQ	Ea
Max door area = 16.5m <sup>2</sup>		
Max door weight = 100kg		

RD Motor Weather Drive 550EVO .....	RDMOTORWD55EVO	Ea
Max door area = 15m <sup>2</sup>		
Max door weight = 100kg		
IP 34 Housing Rating		

### Roller Door Openers - GRIFCO

RD Motor eDrive 2.0 (ML5102 Kit) Left Hand.....	RDMOTORED20KL	Ea
Max door area with 150mm drum = 36m <sup>2</sup>		
Max door area 200mm drum = 50m <sup>2</sup>		

RD Motor eDrive 2.0 (ML5102 Kit) Right Hand .....	RDMOTORED20KR	Ea
Max door area with 150mm drum = 36m <sup>2</sup>		
Max door area 200mm drum = 50m <sup>2</sup>		

Grifco LR-Drive (GLD-RDO) .....	RDMOTOR1300LRD	Ea
Max door area Standard = 28m <sup>2</sup>		
Max door area WindLocked = 22m <sup>2</sup>		
Max door weight = 270kg		

### Sectional Door Operators - MERLIN

SD Motor ComElite 105BBU.....	SDMOTCE105BB	Ea
SD Motor ComElite 105MYQ .....	SDMOTCE105MQ	Ea
SD Motor ComEssen 65MYQ .....	SDMOTCS65MQ	Ea
SD Motor ComUlt 3800MYQ.....	SDMOTCU3800MQ	Ea
SD Motor ComExt 125 2.4C MYQ .....	SDMOTCX125C24	Ea
SD Motor ComExt 125 2.4R BBU.....	SDMOTCX125X24B	Ea
SD Motor ComExt 125 3.0R BBU.....	SDMOTCX125X30B	Ea
SD Motor Whisper Drive 3850EVO .....	SDMOTWD3850EVO	Ea

### Operator Accessories

RD Merlin Evercharge Standby Power Unit.....	RDMERECSPBU	Ea
Merlin Battery Backup Kit - Suitable for residential roller & sectional door operators.....	RDMOTORBBU	Ea
RD Merlin handset 3 button Chl.....	RDMERHS3B3C	E
RD Merlin handset Mini 3 button transmitter.....	RDMERHSM3B3C	Ea
4 Button Hand Transmitter.....	RDMERHSM4B52	Ea
RD Merlin Keyed Cable Release Steel .....	RDMECABRELKSF	Ea
RD Merlin Keypad Wireless S2.0 .....	RDMERKPWS2	Ea
RD Merlin Connect Bundle MYQ .....	RDMERCONBMYQ	Ea
RD Merlin Remote Light LED MYQ .....	RDMERLEDMYQ	Ea
Wall Mount Wireless TrioCode .....	RDGDOHWSWMW	Ea
TrioCode Wireless Keypad .....	RDGDOKPW	Ea

Please refer to the Taurean website ([www.taureands.com.au](http://www.taureands.com.au)) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.





**CAIRNS**  
TEL (07) 4034 6555  
FAX (07) 4034 6511

**TOWNSVILLE**  
TEL (07) 4412 3900  
FAX (07) 4412 3909

**TAUREAN® PRODUCT WARRANTY**

**Stramit Corporation Pty Limited Roller Door Warranty and Exclusion of Liability Statement**

This Warranty is given by:  
Stramit Corporation Pty Limited trading as Taurean Door Systems (Taurean)  
1051 Nudgee Road, Banyo, QLD, 4014  
Phone: (03) 9721 8366 | Email: customerservice@taureands.com.au | Website: www.taureands.com.au

On Taurean® roller door kits (Product) for a twelve-month period from the date of purchase of the Product, against defects which is subject to the matters set out below (Warranty).

The Warranty is in addition to your rights and remedies that may be available to consumers under the Australian Consumer Law. If you are a consumer, as defined under the Australian Consumer Law, our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

This Warranty applies only where:

- The purchaser seeking to rely on the Warranty presents proof of purchase to confirm the date of purchase of the Product;
- If the Product has been installed, an authorised Taurean Door reseller or professional roller door installer (Authorised Installer) performed the installation; and
- Taurean determines, in its absolute discretion, that the Product has a defect covered by this Warranty.

Your Product Warranty does not apply to any defect, loss or damage arising through or caused directly or indirectly by, or as a result of:

- Fair wear and tear (e.g. working seals in the inlet and outlet valves, scratching from cleaning, paint rubs or scuffing on the internal wash coat finish or external painted finish etc.);
- Any defects or deterioration of timber, including drying, after installation of the Product;
- Any weakening, cracking, deterioration, or collapse of the structure or surface, during installation or use, to which the Product is (or is intended to be) affixed;
- Incorrect storage or handling of the Product after delivery;
- Failure to properly install, use or maintain the Product, or to follow any instructions or guidelines for installation, use or maintenance of the Product, including carrying out regular servicing or preventative maintenance;
- The continued use or operation of the Product after any defect becomes apparent, or would have become apparent to a reasonably prudent operator or user;
- Installation, adjustment or use of the Product, other than by Taurean or an Authorised Installer;
- Attempted or completed modifications or repairs to the Product carried out by a person who is not authorised by Taurean to carry out such modifications or repairs;
- The use of the Product, within 800 metres of the sea or other body of water of equivalent or greater salt concentration or in an area subject to chemical or industrial fall out, or otherwise than for any application specified on a quote or order form, price book or catalogue issued by Taurean; or
- Any accident or act of God.

To make a valid claim under this Warranty, a person must submit a claim in writing to Taurean at the abovementioned address within twelve months from the date of purchase of the Product. The claim must include:

- A copy of this Warranty;
- A description and evidence of (e.g. photo) how the Product is defective;
- The date on which the person making the claim discovered the defect;
- Proof of the date of purchase of the Product in the form of an invoice or receipt; and
- If the Product has been installed, proof of the date of installation of the Product in the form of an invoice or receipt from an Authorised Installer.

Where a valid Warranty claim is made in accordance with clause 6 above, Taurean will investigate the claim, and requires reasonable and adequate access to Products, to undertake its investigation. If a Warranty service call finds that your Product does not have a genuine manufacturing defect, or the claim is resolved by a regular service (that comes under the responsibility of the purchaser) Taurean reserves the right to charge you a service fee.

To the fullest extent permitted by law, Taurean expressly excludes all conditions, warranties and undertakings in relation to the Products except as set out in this document.

To the fullest extent permitted by law, and subject to and without limiting your consumer rights under the Australian Consumer Law, Taurean expressly limits its liability under this Warranty and under any other statutory guarantee imposed at law to, at its absolute discretion:

- Replacing or repairing the Product;
- The supply of an equivalent Product; or
- The payment of the cost of the Product, or of repairing the Product, or of acquiring an equivalent Product.

This Warranty is not transferrable, and only applies to the original purchaser. Wherever the Product is sold by any person other than Taurean, such person has no authority whatsoever from Taurean to give any express warranty or guarantee on any Taurean producy in addition to this Warranty.



**PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)**

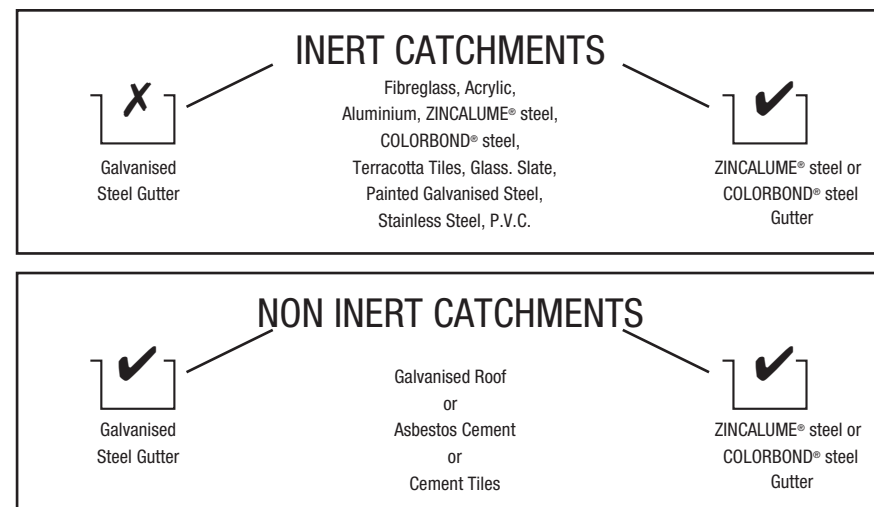
**NOTES**

**COLORBOND® steel / ZINCALUME® steel – CARE & MAINTENANCE**

**Hints and tips to achieve maximum life from your COLORBOND® steel / ZINCALUME® steel product.**

- COLORBOND® steel / ZINCALUME® steel used in areas not washed by rainfall should be cleaned down at regular intervals.
- Brick cleaning acid must not be allowed to contact steel fascia, gutter or roofing and walling.
- Never immerse COLORBOND® steel / ZINCALUME® steel in sand, soil or concrete.
- Do not use “touch-up” spray can on COLORBOND® steel.
- Avoid “swarf” damage remove metal debris from cutting and/or drilling.
- Keep material dry and clear of the ground when in bundles prior to installation.
- Prepainted metal roofing components are often supplied with a protective plastic film. This can be affected by sunlight and should be removed as soon as practicable. Removal can be difficult, if not impossible, if exposed to sunlight for prolonged periods.
- Contact with dissimilar metals and run-off from dissimilar metals such as Copper, lead, etc must be avoided.
- Roofing and guttering need to be free draining and free from the accumulation of dirt or leaves.

**Water Flow Guide Chart**



**Site Delivery Instruction Form**



Customer Name : \_\_\_\_\_

Site Phone Number : \_\_\_\_\_

Site Contact Number : \_\_\_\_\_

Site Contact Name : \_\_\_\_\_

U. B. D. Map Ref : \_\_\_\_\_

U. B. D. Map Ref : \_\_\_\_\_

What is the nearest cross street / landmark : \_\_\_\_\_

1. SITE IS: ☐ HOUSE ☐ COMMERCIAL ☐ INDUSTRIAL

2. DELIVERY SURFACE IS: ☐ BITUMEN ☐ GRAVEL ☐ DIRT / GRASS


3. DOES RAIN AFFECT  
ACCESS TO PROPERTY ☐ YES ☐ NO

4. DOES THE SITE HAVE  
SEMI TRAILER ACCESS ☐ YES ☐ NO

5. IS A HI-AB REQUIRED ☐ YES ☐ NO

PLEASE NOTE, SOME DELIVERIES WILL BE DONE WITH A SEMI TRAILER WHICH AT A MINIMUM WILL BE 16 METRES LONG, 2.6 METRES WIDE AND MAY WEIGH UP TO 30 TONNES GROSS. WHILST HEAVY TRANSPORT VEHICLES SUCH AS CEMENT AGITATOR TRUCKS ETC. MAY BE ABLE TO GET ONTO ALL BUILDING SITES, DUE TO THE LENGTH AND DESIGN OF STRAMIT'S DELIVERY VEHICLES THESE UNITS ARE SOMETIMES RESTRICTED IN THEIR TRAVEL ONCE OFF THE ROAD.

“Sketch map to Site”



FOR FURTHER TRANSPORT OR SITE INQUIRIES, PLEASE CONTACT YOUR LOCAL STRAMIT BRANCH



Customer Account No		SALES ORDER FORM							Order Type		CO Number		
Customer O/N:		Date Ordered	Date Required	Your Ref	Our Ref	Contact Method	Contact No	Time	Receipt No (cash sale)				
Customer Name		Delivery to Suburb:		SITE / STORE		Special (del spec) Instructions:							
		Street Address:											
AGREEMENT REF NO:		SITE TIME / VEHICLE TYPE				SITE ACCESS: GOOD/FAIR/BAD							
QUOTE REF NO:		MAP REF:			Ship Via/Route No.			UNLOADING METHOD:					
No.	Whs	Line Type	Description	Product Code	Qty	Length	Bundle No.	Mark No.	R/B	LM/M²	Price	%	Value
1													
2													
3													
4													
5													
6													
7													
8													
9													
10													
11													
12													
13													
14													
15	FREIGHT												
16	MIN. ORDER QUANTITY S/CHARGE												
17												TOTAL	

NOTES



# TERMS AND CONDITIONS OF SALE

EFFECTIVE DATE: 16 SEPTEMBER 2019

By submitting an application for a Credit Account and/or ordering Goods from Us, You agree that the following Terms and Conditions of Sale (“Conditions”) will apply to the supply.

## 1. DEFINITIONS AND INTERPRETATION

- 1.1 In these Conditions:
  - (a) **Anti-Corruption Law** means any law prohibiting or relating to bribery, corruption, kickbacks, secret commissions or money laundering, including without limitation, the Foreign Corrupt Practices Act 1977(US), the Bribery Act 2010 (UK), the Criminal Code Act 1995 (Cth) and any anti-corruption regulations and provisions applicable in the European Union or in any other locations in which We or any member of the We carry on business;
  - (b) **Australian Consumer Law** means the Australian Consumer Law in Schedule 2 of the Competition and Consumer Act 2010 (Cth);
  - (c) **Australian Standards** means the applicable codes and guidelines published from time to time by Standards Australia;
  - (d) **Consumer Contract** has the meaning given to that term in the Australian Consumer Law;
  - (e) **Contract** means the contract for the sale and/or supply of Goods between You and Us that is constituted by these Conditions and any application for a Credit Account;
  - (f) **Credit Account** means the commercial credit account You have with Us under the Contract;
  - (g) **Due Date** means the date You must pay for the Goods as specified on Our invoices;
  - (h) **Force Majeure Event** means any event outside a party's reasonable control which may affect the parties' obligations under the Contract, including acts of Gods, war, terrorism, fire, flood, storm, earthquake, hurricane, cyclone, riot, power failure, industrial action, defaults of manufacturers or suppliers, the inability to obtain equipment, supplies or other facilities that are not caused by a failure to pay labour disputes, theft, criminal actions or any other similar events;
  - (i) **Goods** means all goods, merchandise and/or services requested by You in any Order and/or supplied by Us to You under a Contract from time to time;
  - (j) **GST** and related terms have the meanings given to those terms in A New Tax System (Goods and Services Tax) Act 1999 (Cth);
  - (k) **Insolvency Event** means any action which places an entity or individual under external management in respect of its assets or where an entity or individual makes an assignment, agreement or arrangement in respect of its assets for the benefit of its creditors, including but not limited to the appointment of a liquidator, receiver, manager, administrator or trustee;
  - (l) **Order** means a request by You to Us for the supply of Goods;
  - (m) **PPSA** means the Personal Property Securities Act 2009 (Cth);
  - (n) **Price List** means the price list issued by Us from time to time in the particular State or Territory in which an Order is placed;
  - (o) **Quotation** means the verbal or written estimate given by Us for the cost to supply specified Goods, and includes a Price List issued by Us from time to time;
  - (p) **Small Business Contract** has the meaning given to that term in the Australian Consumer Law;
  - (q) **Special Building Products** means the Goods, materials and/or products which are purchased, produced or supplied by Us in accordance with a particular design, drawing or specification that is requested by You;
  - (r) **“We”, “Us” or “Our”** means Stramit Corporation Pty Limited (ABN 57 005 010 195) and any subsidiaries, associated, related and parent companies or businesses, successors or assigns, including the businesses trading as ‘Stramit Building Products’, ‘Integrated Steel Solutions’ and ‘Taurean Door Systems’.
  - (s) **You or Your** means any individual, company, organisation or any other entity stated in the Contract to whom or to which We supply or offer to supply Goods under these Conditions, including any person, entity or agent acting on their behalf.
- 1.2 Headings are for convenience only and do not form part of these Conditions.
- 1.3 Reference to any legislation includes a modification, revision, amendment, re-enactment of, legislation enacted in substitution for, regulation, order-in-council or any other instrument from time to time issued, enacted or made under that legislation.
- 1.4 Reference to the singular includes the plural and the plural includes the singular.
- 1.5 The words include and including are not terms of limitation.
- 1.6 Terms and expressions used in these Conditions that are defined in the Australian Consumer Law, the GST Act or the PPSA have the same meanings respectively given to those terms and expressions in those Acts.

## 2. GENERAL MATTERS

- 2.1 The Contract constitutes the entire agreement for the sale and/or supply of Goods between the parties. All prior representations, trade custom or previous dealings between the parties are excluded and are not applicable in the interpretation of the Contract. In the event of any inconsistency with any other document including any Quotation, Order or other document You provide us, the terms of the Contract take priority and prevail.
- 2.2 By placing an Order, or accepting delivery of Goods pursuant to any Order, You are deemed to have read, understood and accepted these Conditions as binding on You.
- 2.3 You agree to comply with the Anti-Corruption Law and must not commit any act or omission which causes or would cause You or Us to breach or commit an offence under any Anti-Corruption Law.
- 2.4 We have no obligation to agree to provide or continue to provide any credit facilities to You. You are not entitled to any credit facilities until You receive notice from Us to that effect and We may at any time by notice to You reduce, vary or terminate any such credit facilities at Our discretion. Any credit limit that may apply from time to time in respect of credit facilities is for administrative convenience and solely for the benefit of Us and such credit limit does not constitute a term of these Conditions nor of any Deed of Guarantee, Indemnity and Charge in respect of Your obligations.

## 3. ORDERING AND SUPPLY OF GOODS

- 3.1 You may purchase Goods by placing an Order with Us verbally or in writing. An Order constitutes an offer by You to purchase Goods from Us pursuant to these Conditions.
- 3.2 We may accept or decline, in whole or in part, any Order by notifying You in writing or by delivering to You the Goods the subject of Your Order. The parties acknowledge and agree that acceptance of an Order gives rise to a Contract under these Conditions.
- 3.3 You may not withdraw, cancel or revoke an Order after acceptance without Our written consent.
- 3.4 No Quotation will constitute an offer to supply Goods to You. Any Quotation expires on the date stated or otherwise 30 days after the date the Quotation is issued. We reserve the right to vary or withdraw any Quotation before an Order is accepted.
- 3.5 You must obtain Our written consent if You wish to resell any Goods online.

## 4. PRICES, GST AND OTHER EXPENSES

- 4.1 Unless otherwise agreed in writing between the parties, the price payable for Goods is the price specified in Our invoice plus any duties, fees, taxes (including GST), delivery charges and levies charged or imposed by the Contract.
- 4.2 Unless otherwise expressly stated, all amounts payable by You for Goods are exclusive of GST.
- 4.3 If GST is imposed on any supply of Goods made in accordance with a Contract, You must pay to Us an additional amount equal to the GST payable on or for that taxable supply of Goods. Payment of any GST must be made at the same time as payment for the Goods.

## 5. PAYMENT AND CREDIT

- 5.1 Unless otherwise agreed between the parties, payment for Goods is to be made by You on or before the Due Date.
- 5.2 The parties acknowledge and agree that Our acceptance of an application for a Credit Account gives rise to a Contract under these Conditions.
- 5.3 You authorise Us to open a Credit Account in Your name listed on the application for a Credit Account and to debit the price of the Goods supplied to You and all other amounts owed by You to Us (including fees and interest payable under a Contract).
- 5.4 Any Credit Account granted by Us must only be used by You and cannot be assigned, transferred or made available for use by any other entity or person (including by a subsequent purchaser of You) without Our prior written consent.
- 5.5 If You are in default of any payment, We are entitled to:
  - (a) charge You a reasonable surcharge for processing payments made by credit card, at an amount advised by Us from time to time;
  - (b) charge You interest on all overdue accounts at a rate which is four (4) percent higher than the cash rate last published by the Reserve Bank of Australia as at the Due Date, calculated and payable daily and compounded from the due date until the invoice is paid in full. The parties agree that such interest charge is not a penalty;
  - (c) require the payment of Goods prior to delivery of any further Goods;
  - (d) demand that all of Our invoices issued to You but not yet due and all overdue invoices are immediately due and payable;
  - (e) charge You a reasonable fee where any payment is dishonoured or returned by Your financial provider (or where We are otherwise unable to

process any payment from Your financial provider) at an amount advised by Us from time to time;

- (f) preclude You from participating in any special deals, discounts, bonus payments, redemptions, rebates and all other incentive programs until Your account is no longer overdue.
- 5.6 You agree to indemnify Us for:
  - (a) all reasonable legal costs and other expenses which are incurred by Us or are likely to be incurred by Us as a result of any breach, act or omission by You arising either directly or indirectly from or in connection with these Conditions including legal fees on a solicitor/client basis in the recovery or attempted recovery of any overdue amount for Goods;
  - (b) any stamp duty or other government rates, taxes (including GST) or charges levied on or in connection with the Credit Account, any Contract for the supply of Goods and any deed of guarantee, indemnity and charge; and
  - (c) all costs associated with the registration, maintenance and withdrawal of any Security Interest which secures Your obligations under any part of the Credit Account, Contract and these Conditions.
- 5.7 The parties acknowledge and agree that:
  - (a) We may apply any payment received from You towards any debt owed by You to Us;
  - (b) We may set-off any credit amount that We owe to You against any debt owed by You to Us; and
  - (c) You may not withhold payment of any money in respect of any set-off or claim You might have against us without Our prior written consent.

## 6. DELIVERY

- 6.1 We may make the Goods available for Your collection or deliver the Goods, including delivery by a third-party carrier and delivery by instalments. You will not be entitled to cancel the balance of an Order if We fail to deliver any instalment.
- 6.2 You authorise Us to deliver the Goods to the place nominated by You and to leave the Goods at such place whether or not any person is present to accept delivery. We are not obliged to obtain a signed receipt, signed delivery docket or other acknowledgement of the Goods from any person at the nominated place for delivery, but if such signature or acknowledgement is obtained from a person reasonably believed by Us to hold authority to sign for or otherwise take delivery of the Goods, then such signed receipt, signed delivery docket or other acknowledgement will be conclusive evidence of Your acceptance of the Goods delivered.
- 6.3 You must provide a suitable and safe area at the nominated delivery site to unload the Goods and ensure that Our (or Our agents, employees or contractors) use of the nominated delivery site is compliant with relevant work health and safety legislation.
- 6.4 All delivery times indicated by Us are estimates only and subject to the Goods being available and Our reasonable ability to make the delivery on that date. Failure to deliver within the specified time will not confer a right upon You to cancel or terminate Your Order or refuse to pay for the Goods.
- 6.5 Delivery of the Goods is deemed to occur when they are handed to You or Your representative, are delivered to the premises or site nominated by You, or are collected from Us by You or Your representative, whichever occurs first. We shall not be liable on any basis whatsoever for loss suffered by You after delivery of the Goods to You.
- 6.6 You agree to examine the Goods immediately after delivery.
- 6.7 You must pay and We reserve the right to charge You all costs and fees incurred as a result of:
  - (a) any delay in delivery of the Goods which is caused by You or the conditions of the nominated delivery site or the nature of the Goods being delivered;
  - (b) any unexpected labour or additional costs in connection with the delivery; and
  - (c) any permit or licence or other extraordinary costs of transporting or delivering Goods (including wide or long loads).
- 6.8 If You do not collect the Goods by the nominated collection date or we are unable to deliver the Goods to You, then We reserve the right to store the Goods or deliver the Goods to any nominated delivery site and charge You all costs of storage or delivery (as applicable) incurred by Us for such storage or delivery.
- 6.9 If You are collecting the Goods You acknowledge and agree that entry onto Our premises by You or Your agents, employees, contractors or other representatives is at Your/their own risk and We will not be liable for any loss, damage or injury caused by any act or omission whatsoever whilst on Our premises.
- 6.10 You agree to indemnify and hold Us harmless (or Our agents, employees or contractors) from any and all claims, loss and damage arising out of:
  - (a) delivery of the Goods (including any loss or damage caused by delivering the Goods to an unattended site and any loss or damage suffered by Us as a result of any property damage or personal injury caused by the delivery and unloading the Goods);
  - (b) Your or Your agent, employee, contractor or other representative's attendance at Our premises; and
  - (c) Your failure to provide a safe, suitable and compliant nominated delivery site in accordance with Clause 6.3,

except to the extent that We (or Our agents, employees or contractors) have committed an act of negligence, breach of the law or breach of the Contract.

## 7. RISK, TITLE AND CHARGE

- 7.1 Unless otherwise agreed by the parties in writing, all risk in the Goods passes to You upon delivery or collection of the Goods.
- 7.2 Title to any Goods supplied by Us will not pass to You until all amounts owing by You on any account whatsoever have been received by Us.
- 7.3 Until title in the Goods passes to You, the Goods supplied are held by You for Us as bailee and You must store the Goods separately from Your own Goods and those of any other party in a manner which clearly identifies the Goods as Our property and which ensures the Goods do not become damaged or spoiled.
- 7.4 You may resell any Goods before title in the Goods passes to You, provided that You:
  - (a) resell any such Goods to a third party in the ordinary course of business;
  - (b) act in any such transaction as Our fiduciary agent;
  - (c) hold the proceeds of sale of any such Goods on trust for Us and in a separate account with separate records; and
  - (d) account to Us in respect of those proceeds or any other payment made by a third party for any sale of the Goods and allow us to inspect any records of any payments.
- 7.5 We may repossess any Goods (wherever they are located) if any amount due by You in respect of the Goods remains unpaid after the Due Date or where You suffer an Insolvency Event.
- 7.6 You irrevocably grant to Us or Our agents or any other nominated representative an unrestricted right and licence without notice to enter any premises occupied by You to identify and repossess any of the Goods without in any way being liable to You or any other third party.
- 7.7 You must insure the Goods, and keep the Goods insured, at Your own cost and expense at all times to the full extent of the price paid or payable for those Goods, including (but not limited to) between the time that risk in the Goods passes to You and the date that title in the Goods passes to You.
- 7.8 You must indemnify Us in full for any loss or damage occasioned to the Goods between the time that risk in the Goods passes to You and the time that title in the Goods passes to You.
- 7.9 To secure payment of all monies owed to Us by You for the sale or supply of Goods, You hereby:
  - (a) charge all of Your interest in real and personal property (including all property acquired after the date of the Contract) in favour of Us whether or not a demand has been made on You (“**Charge**”);
  - (b) authorise and consent to Us taking all actions necessary to give effect to the Charge, including the lodgement of a caveat upon any title of Your real property, whether held in Your own right or as trustee of any trust, or any other security document; and
  - (c) irrevocably appoint Us and any person nominated by Us severally as Your attorney, with power to execute, sign and deliver (which delivery may be subject to such terms and conditions as the attorney thinks fit) such caveat or other security document to effect the Charge granted under this part.

## 8. APPLICATION OF THE PPSA

- 8.1 You acknowledge and agree that:
  - (a) these Conditions constitute a security agreement for the purposes of the PPSA (“**Security Agreement**”) and creates a security interest in the Goods supplied by Us from time to time and any proceeds of the sale of the Goods to secure payment for the Goods (“**Security Interest**”);
  - (b) each sale or supply of Goods by Us under these Conditions is subject to the Security Agreement for the purposes of the PPSA; and
  - (c) We may lodge a financing statement on the Personal Property Securities Register (“**PPSR**”) in respect of the Security Interest in the Goods and the proceeds of the sale of the Goods, including as a purchase money security interest (as that term is defined in the PPSA) (“**PMSI**”), pursuant to these Conditions.
- 8.2 You must do all such things, provide all such information and sign all such documents as are necessary and reasonably required to enable Us to acquire a perfected Security Interest in the Goods.
- 8.3 You must not change Your name, change Your structure, status or partnership, or assign or sell Your business to another party, or initiate any change to any registered documentation, or act in any manner which would impact on our registered Security Interest without Our prior written consent. No such event shall affect Your liability under these Conditions, as You are named in any applications for credit, until a new application for credit made in Your new entity name as restructured or changed is received and approved by Us in writing.
- 8.4 To the extent permitted by law if the PPSA applies You irrevocably waive Your rights to:
  - (a) receive notices or statements under sections 95, 118, 121(4), 129, 130, 132(2), 132(4) or 135(2);
  - (b) redeem any products under section 142;
  - (c) reinstate any Contract under section 143; or
  - (d) receive a verification statement as defined in the PPSA.



- 8.5 If the law which requires a period of notice or a lapse of time cannot be excluded, but the law provides that the period of notice or lapse of time may be agreed, that period or lapse is one day or the minimum period the law allows to be agreed (whichever is the longer).
- 8.6 You agree not to exercise Your rights to make any request of Us under section 275(6) of the PPSA, to authorise the disclosure of any information under that section or to waive any duty of confidence that would otherwise permit non-disclosure under that section.
- 8.7 The parties shall not disclose information of the kind mentioned in section 275(1) of the PPSA, except in the circumstances where:
- (a) disclosure is required by sections 275(7)(b) to (e) of the PPSA; and/or
- (b) We disclose information of the kind mentioned in section 275(1) of the PPSA to the extent that We are not doing so in response to a request made by an “interested person” (as defined in section 275(9) of the PPSA) pursuant to section 275(1) of the PPSA.
- 8.8 Notwithstanding Clause 8.10(a), You shall only authorise the disclosure of information for the purposes of section 275(7)(c) of the PPSA, or request information under section 275(7)(d) of the PPSA, if We approve such disclosure or request for information in writing.
- 8.9 Nothing in this part will prevent any disclosure of information by Us that We believe is reasonably necessary to comply with any other obligations that We may have under the PPSA.
- 8.10 If You default in the timely performance of any obligation owed to Us, We may enforce the Security Interest by exercising all or any of Our rights under these Conditions, the general law and the PPSA.
- 8.11 Nothing in this Clause 8 limits or is limited by any other provision of these Conditions or any other agreement between the parties.

**9. BUILDING PRODUCTS AND MANUFACTURE**

- 9.1 No sale under these Conditions constitutes a sale by sample, description or specification. You acknowledge and agree that:
- (a) all samples, descriptions, illustrations and any other specification contained in any of Our Price List, product and service guide, catalogue or advertising material are approximate and may vary from the Goods sold, supplied or produced (within Australian Standards);
- (b) You are liable for ensuring that the Goods are suitable for Your intended use; and
- (c) We are not liable to You for any loss, damage, cost or expense suffered by You as a result of Your reliance upon any such description, illustration, specification or any other characteristic of a sample except to the extent that We have committed an act of negligence, breach of law or breach of a Contract.
- 9.2 We are not obliged to accept any materials supplied by You for the manufacture of any Special Building Products. If We do accept such materials on Your request then You acknowledge and agree that:
- (a) We make no warranty or representation as to the quality, fitness for purpose or suitability of such materials supplied by You; and
- (b) We are not liable for any failure, delay, loss or damage caused or in connection with any materials supplied by You or any Special Building Products which are manufactured from materials supplied by You.
- 9.3 Except where the Contract is a Consumer Contract or a Small Business Contract and to the extent permitted by law, You acknowledge and agree that:
- (a) We will not be liable for any lack of fitness for purpose, property damage or personal injury caused by, or any other failure of Special Building Products;
- (b) any skill, judgment, advice, recommendation, information or assistance provided by Us in relation to Special Building Products is so provided in good faith and You do not rely on such skill, judgment, advice, recommendation, information or assistance as to the suitability of any particular purpose of Special Building Products; and
- (c) You will indemnify Us and hold Us harmless from any liability for any loss or damage caused to or suffered by You or any third party as a result of a Special Building Product.
- 9.4 We reserve the right to:
- (a) charge You, or otherwise recover any cost We incur, for any testing or inspection of Special Building Products or Goods which are manufactured using materials supplied by You;
- (b) charge You, or otherwise recover any cost We incur, for Our acquisition and/or use of any tool, equipment, pattern, design, system or any other device of manufacture (“**Manufacturing Tools**”) required to satisfy, complete or perform an Order made by You; and
- (c) hire Manufacturing Tools to You on agreed terms.
- 9.5 You acknowledge and agree that any charges, costs, payment for charges or costs, or agreement for hire does not vest in You any right of title or intellectual property in the Manufacturing Tools and You may not use the Manufacturing Tools without Our prior written consent.
- 9.6 You agree to indemnify Us and hold Us harmless against any claim, demand or suit arising out of any loss, damage or personal injury caused to You, Your agents or employees or any other third party, by a Manufacturing Tool provided by Us except to the extent that We have committed an act of negligence, breach of law or breach of the Contract.

**10. WARRANTIES AND LIMITATION OF LIABILITY**

- 10.1 If You are a Consumer as that term is defined under the Australian Consumer Law, Our Goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are entitled to have the Goods repaired or replaced if the Goods fail to be of acceptable quality and the failure does not amount to a major failure. The benefits provided to You under this Clause 10 are in addition to other rights and remedies available to You under the law.
- 10.2 You must notify Us of any claim in writing in accordance with the following terms:
- (a) for any Goods that do not correspond with the applicable Order, within two (2) days of delivery or collection of those Goods;
- (b) for any Goods which are allegedly defective or damaged, or any services which are allegedly deficient, within two (2) days of delivery/ collection of those Goods or performance of the services (as applicable);
- (c) for any disputed invoice, within fourteen (14) days of receiving that invoice; and
- (d) You must take all steps necessary to mitigate any loss arising as a result of any defect in the Goods provided.
- 10.3 You acknowledge and agree that any failure by You to make a claim in accordance with the terms in Clause 10.2, or to mitigate any loss arising as a result of any defect, may result in Your deemed acceptance of the Goods (including any defects) in compliance with these Conditions.
- 10.4 To the extent permitted by the Australian Consumer Law and any other applicable law, all other conditions, guarantees or warranties (whether implied or otherwise) not set out in this Clause 10 are excluded. Nothing in this Clause 10 is to be interpreted as excluding, restricting or modifying any law or statute applicable to the supply of Goods which cannot be excluded, restricted or modified.
- 10.5 To the extent permitted by law, Our liability arising from the breach of such conditions, guarantees or warranties will (at Our option) be limited to and completely discharged in the case of Goods, either:
- (a) the replacement or cost of replacement of the Goods; or
- (b) the supply or cost of supply of equivalent Goods; or
- (c) the repair or cost of repair of the Goods.
- 10.6 Except where the Contract is a Consumer Contract or Small Business Contract, You acknowledge and agree that We are not liable to You for:
- (a) any indirect, special, economic or consequential loss, cost, damage or expense;
- (b) any other loss of a kind which is reasonably beyond the normal measure suffered by someone in a like situation; and
- (c) any loss of revenue, business profits, loss of expected savings, loss of chance or business opportunity, business interruption, loss or reduction of goodwill or damage to reputation or any loss of value or intellectual property.
- 10.7 Except where the Contract is a Consumer Contract or a Small Business Contract, You agree to indemnify Us for any reasonable loss, cost, damage or expense suffered by Us arising from or in connection with:
- (a) any breach of these Conditions and/or the Contract by You;
- (b) any negligence committed by You under these Conditions and/or the Contract;
- (c) any breach of law by You which is applicable under these Conditions and/or the Contract;
- (d) the death or injury to any person or damage to any property arising from the performance by You of Your obligations under any Contract; and
- (e) any failure to install the Goods in accordance with their applicable installation instructions and manuals provided with the Goods or to operate the Goods in accordance with their applicable operation instructions and manuals provided with the Goods or in connection with Your negligence or the negligence of any third party, including in relation to the installation or operation of the Goods.
- 10.8 To the extent permitted by law, We will not be liable to You for:
- (a) any loss or damage incurred by you as a result of delay in the performance or non-performance of any of Our obligations under these Conditions which is caused by any Force Majeure Event or otherwise occasioned by any cause whatsoever that is beyond Our reasonable control;
- (b) any defects caused by fair wear and tear of Goods; and
- (c) any defect caused by Your failure to:
- (i) install, assemble, handle and/or use Goods in accordance with relevant Australian Standards and standard building practices;
- (ii) follow any instructions which we issue to You on sale or supply of the Goods; or
- (iii) any other instructions for the installation, care and maintenance of Goods that We may issue to You or publish from time to time;
- (d) any failure of materials supplied by You for the purpose of Special Building Products, or any Special Building Products which are manufactured using materials supplied by You; or

- (e) the cost of removing defective Goods (whether installed or otherwise) or the cost of installing replacement Goods.
- 10.9 You agree to bear all costs and expenses associated with making any claim under the Australian Consumer Law, except where We agree that the Goods do not comply with the statutory guarantees provided in that Act, in which case We will refund Your reasonable cost of returning the Goods to Us.

**11. RETURN OF GOODS**

- 11.1 Unless otherwise agreed by Us in writing, We will not accept the return of Goods.
- 11.2 Where We agree to accept return of any Goods, You must provide Your proof of purchase for the Goods to be returned and We reserve the right to charge You reasonable restocking, disposal or repacking charges which may be incurred by Us as a result of the Goods being returned.
- 11.3 You acknowledge and agree that the following Goods cannot be returned:
- (a) any Goods which are not in original or resaleable condition; or
- (b) any Special Building Products, unless faulty. Any manufacturing surcharge for Special Building Products is non-refundable.

**12. VARIATION AND DEFAULT**

- 12.1 We may vary a Contract by notice in writing to You. If the Contract is a Consumer Contract or a Small Business Contract, then You may consider the variation and if not acceptable may elect not to proceed with the purchase of Goods ordered before the date of the variation but which are intended to be subject to the variation. If the Contract is not a Consumer Contract or a Small Business Contract, You agree that Goods delivered and services performed and/or ordered after the date of the notice of variation will be subject to the variation and acceptance of the Goods or services or the placing of the order will be deemed to be an acceptance of such varied terms and conditions.
- 12.2 The Contract (including these Conditions) may not be varied, altered or amended by You unless such variation, alteration or amendment is in writing and signed by or on behalf of Us.
- 12.3 We reserve the right in Our sole discretion to immediately:
- (a) suspend or cancel delivery of Goods or any current Order(s) for the supply of Goods; and/or
- (b) suspend or terminate Your Credit Account; and/or
- (c) require immediate payment of the balance of any Credit Account, invoices or any other amounts due and payable whether or not the Due Date has expired; and/or
- (d) register a default with any credit reporting agency, where applicable; and/or
- (e) enforce Our rights under any Security Interest; and/or
- (f) suspend or terminate the Contract; where any of the following occurs:
- (g) any amounts payable for Goods remain unpaid after the Due Date; and/or
- (h) You exceed the limit of Your Credit Account; and/or
- (i) You breach a material term of the Contract; and/or
- (j) either of the parties suffer a Force Majeure Event which delays or prevents performance of the whole or any part of the Contract; and/or
- (k) You suffer an Insolvency Event; and/or
- (l) You allow distress to be levied or a judgment, order or security to be enforced, or to become enforceable against Your property including under the PPSA; and/or
- (m) any other circumstances where We are of the reasonable opinion that You are unable to pay Your debts as and when they fall due and payable or You have suffered a material adverse change in Your financial circumstances.
- 12.4 You are entitled to immediately terminate or suspend the whole or any part of the Contract, or Your Credit Account, where:
- (a) the Contract is a Consumer Contract or Small Business Contract; and
- (b) We suffer an Insolvency Event and/or suffer a Force Majeure Event which delays or prevents performance of the whole or any part of the Contract and/or We commit a breach of a material term of the Contract.
- 12.5 You acknowledge and agree that on termination of the Contract We may recover from You the reasonable cost of materials or Goods acquired for the purpose of future Orders, delivery or supply of Goods to You.

**13. NOTICES**

- 13.1 Notices to be given by You to Us may be delivered personally or sent to the National Credit Manager at Our address at 1051 Nudgee Road Banyo, QLD, 4014 or sent by email to Credit@stramit.com.au and unless the contrary is proved the notice will be taken as delivered in the case of mail: on the fourth business day following posting and in the case of email: immediately provided no notification of sending error is received by You.
- 13.2 Notices to be given by Us to You may be delivered personally or sent by prepaid post to Your last known address or sent by email to Your last known email address and unless the contrary is proved the notice will be taken as delivered, in the case of mail: on the fourth business

day following posting and in the case of email: immediately provided no notification of sending error is received by Us. Invoices and statements are deemed to be received by You on the third business day after posting.

**14. GOVERNING LAW**

- 14.1 Each Contract will be governed by and construed according to the laws of the State or Territory of the place of delivery of the Goods and the parties submit to the exclusive jurisdiction of the courts of that State or Territory.

**15. SEVERANCE, TRANSFER AND WAIVER**

- 15.1 If any part of these Conditions (including any provision, part, paragraph, phrase or word) is illegal, invalid or unenforceable it will be read down so far as necessary to give it a valid and enforceable operation. If that is not possible, it will be severed from these Conditions without affecting the remaining provisions of these Conditions (which will remain in full force and effect).
- 15.2 Obligations and rights under these Conditions cannot be assigned or transferred to any third party without Our written consent.
- 15.3 The failure, delay or partial exercise of a party in exercising any right or remedy, or the granting of any indulgence by a party in favour of the other, under these Conditions does not prohibit, affect or constitute a waiver of the parties' rights and remedies against each other under these Conditions.

**16. PRIVACY**

- 16.1 You acknowledge and agree that We may collect personal information and credit information about You and Your directors, officers, partners and the Guarantors (each a “**Relevant Party**”).
- 16.2 You warrant to Us that You have obtained the consent of each of the Relevant Parties to the collection, use and disclosure of their personal information and credit information by Us in accordance with this Clause 16 and Our Privacy Policy.
- 16.3 Our Privacy Policy, Credit Reporting Policy and Statement of Notifiable Matters available on our website at [www.stramit.com.au/privacy-policy](http://www.stramit.com.au/privacy-policy) or upon request to Us, forms part of these Conditions.
- 16.4 Our website may be hosted, or some data may be stored, overseas. All personal information and credit information derived from Australia will still be treated in accordance with Our Privacy Policy while being stored overseas.
- 16.5 If We are unable to obtain all Your required personal and credit information, or if You do not provide all of the information that We request, We may reject or delay Your Credit Account application (including any application of a third party such as a guarantor), cease Our commercial relationship with You or choose not to provide You with Goods.

**17. ELECTRONIC EXECUTION**

- 17.1 Each party consents and agrees that this agreement may be executed and delivered:
- (a) by any and all parties by way of electronic signature; and
- (b) by email or other electronic means and this has the same force and affect as delivery of an original document with original signatures.
- 17.2 If this agreement is executed by any party by way of electronic signature it must be considered an original and each party consents and agrees to be legally bound by this agreement's terms and conditions. Each party agrees that no certification authority or other third party verification is necessary to validate its electronic signature and that the lack of such certification or third party verification will not in any way affect the enforceability of its electronic signature or any resulting contract between the parties.
- 17.3 Each party must do all things and execute all documents necessary to give full effect to this agreement.

