



PRODUCT AND SERVICE GUIDE

EFFECTIVE MARCH 2024

Supersedes October 2020

METROPOLITAN, SOUTHERN VICTORIA GIPPSLAND & WESTERN VICTORIA

SALES ORDERS

Ph 03 9237 6300

ALBURY

Ph 02 6092 3700

COUNTRY VICTORIA & SOUTHERN NSW

BENDIGO

Ph 03 5448 6400





CONTACT US

How can we help you?

Customer Service, Sales and all General Enquiries

To place an order, request a quote, or recieve tailored customer support, please contact your local branch.


Check the locations page opposite for the phone number and address of your nearest Stramit branch.

For general enquiries, email contactus@stramit.com.au

For order enquiries, email orders@stramit.com.au

Techncial Services

For specification and technical support, email techsupport@stramit.com.au

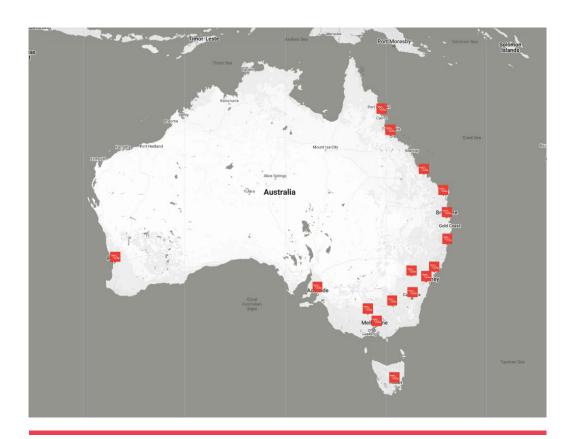



SERVICE LOCATIONS

The Stramit web page can be found at **stramit.com.au**. Details of many Stramit products can also be seen on the AIA site 'Product Selector' selector.com.au or SteelSelect.com.au.

CUT-OFF

			TIMES ²		
REGION	LOCATION	CONTACT DETAILS	STANDARD DELIVERY	SHED BUNDLE LEAD TIME ³	PICK-UP HOURS ⁴
	SYDNEY 33-83 Quarry Rd, Erskine Park NSW 2759	Ph 02 9834 0909	4pm	21 Days	7am - 4pm
	CANBERRA 4 Bass St, Queanbeyan NSW 2620	Ph 02 6298 2500	4pm	21 Days	7am - 4pm
NSW & ACT	COFFS HARBOUR 6 Mansbridge Dr, Coffs Harbour NSW 2450	Ph 02 6656 3800	4pm	21 Days	7am - 4pm
	NEWCASTLE TBA	Ph 02 4041 3400	4pm	21 Days	N/A
	ORANGE 51 Leewood Dr, Orange NSW 2800	Ph 02 6360 9200	4pm	21 Days	7am - 4pm
	MELBOURNE 3/1464 Ferntree Gully Rd, Knoxfield VIC 3180	Ph 03 9237 6300	4pm	12.30pm	7am - 4pm
VIC	ALBURY 18 Ariel Dr, Albury NSW 2640	Ph 02 6092 3700	4pm	21 Days	7am - 4pm
	BENDIGO Lot 7-9 Ramsay Court, Kangaroo Flat VIC 3555	Ph 03 5448 6400	4pm	21 Days	7am - 4pm
TAS	HOBART 57 Crooked Billett Dr, Brighton TAS 7030	Ph 03 6262 8788	4pm	21 Days	7am - 4pm
SA	ADELAIDE 11 Stock Rd, Cavan SA 5094	Ph 08 8219 20001	4pm	21 Days	7am - 4pm
	BRISBANE 57-71 Platinum St, Crestmead QLD 4132	Ph 07 3803 9999	4pm	12.30pm	7am - 4pm
South QLD	MARYBOROUGH 10 Activity St, Maryborough QLD 4650	Ph 07 4123 9500	4pm	21 Days	7am - 4pm
	ROCKHAMPTON 41 Johnson St, Parkhurst QLD 4702	Ph 07 4921 5600	4pm	21 Days	7am - 4pm
North	CAIRNS 53 Vickers St, Edmonton QLD 4869	Ph 07 4034 6555	4pm	21 Days	7am - 4pm
QLD	TOWNSVILLE 402-408 Bayswater Rd, Garbutt QLD 4814	Ph 07 4412 3900	4pm	21 Days	7am - 4pm
WA	PERTH 605-615 Bickley Rd, Maddington WA 6109	Ph 08 9493 8800	4pm	12.30pm	7am - 4pm

Our service proposition is based around available manufacturing capacity on any given day. Demand can fluctuate and impact lead times. Please check with your local branch when placing your order.

This Service Offer excludes large orders related to Commercial projects or Consolidated Shed orders.

¹ Business days only (excludes weekend and public holidays).
² Days only (excludes weekend and public holidays). Standard 48hr Delivery refers to order cut-off times for standard lead-time products as defined in our Product and Services Guide. Please be aware that some products have minimum lead times that may exceed these lead times. Please check the product listing in our Product and Services Guide or check with your local branch when placing order.

Additional charges may apply. Check with your local branch for capacity when ordering.


^{*} Registered trademarks of Stramit Corporation Pty Limited. ABN 57 005 010 195 trading as Stramit Building Products. A member of the Fletcher Building Group. TRUECORE', COLORBOND', ZINCALUME' and * colour names are registered trade marks of BlueScope Steel Limited. ™ colour names are trade marks of BlueScope Steel Limited. ABN 16 000 011 058. © Stramit Corporation Pty Limited. This information is accurate at March 2024.



CUSTOMER PORTAL

Keeping up to date with your order, made simple.

Our secure Customer Portal gives you access to the status of your orders whenever, and wherever, you need an update. The portal lets you track your orders live, from the time our Customer Service team enters it, through processing and manufacturing, while it's being picked and packed and when it's out for delivery to you.



As an account customer, our portal allows you to:

- Track your order in real time
- Search current and historical orders to see related information
- Download your order confirmations
- See order details in granular detail
- Download Proof of Delivery (PODs)
- View Estimated Time of Arrivals (ET As) for your deliveries
- See when an order is Ready to Pick Up
- Share the order tracking with another party, e.g. an installer or end customer

Designed to make doing business easier with Stramit, the Customer Portal is available on any internet connected device and only requires registration - no downloads needed.

Register your interest today at:

https://www.stramit.com.au/resources/design-software/stramit-customer-portal/

ORDERING

For Trade and Account Customers seeking takeoffs and quotes, please send drawings and information to: takeoffs@stramit.com.au

Please contact and email all your orders through to your local branch.

For Purl in Orders, please also send through your drawings and NC Files to your local branch to aid in order accuracy.

For Flashings Orders, we require drawings to ensure accurate manufacturing of your products. Please email your drawings through when placing your order. You can find our Flashing Order Form on our website under **Resources**.

All products manufactured or purchased specifically to your requirements cannot be returned. Stock items may be returned for credit, although restocking fees will apply.

For Order Pickups, please refer to our Loading Requirements Guide on our website under Resources.

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

INDEX	
PRODUCTS AND SERVICE GUIDE	
Site Delivery Instructions Form	2
Flashing Detail Order Form	3
Stramit® Purlins & Bridging Order Pads	4-6
Important Notice & Production Days	7
Standard Delivery Charges	8
<u>Delivery Information</u>	9
Delivery Services to Country Areas – Nominated Days	10-11
Loading Requirements Product Availability – Finish and Colour	12-13 14-15
Product Care	16
Minimum/Maximum Product Length Details	17
Quick Roofing Estimate	18
Selecting Your Product - Cover, Spans & Pitch	19
ROOFING • CLADDING • ACCESSORIES	
Stranit® Corru gated	20-21
Stramit® Cu.rving Quality •T ank Iron	22-23
Stramit Monoclad®	24-25
Stramit Longspan®	26
Stramit Speed Deck Ultra® COLORBOND® steel	27 28
Stramit Mini Corry® • Stramit Minirib® • Stramit K-Panel®	32
Stramit Monopanel • Super Six Profile	33
Stramit SharpLine®	33
Stramit Uniguard™ Fire Resisting Wall System	34
Foil • Blanket • Batts • Wire Mesh	36
General Accessories • PA Doors	37
FASCIA • GUTTER • DOWNPIPE	00
Stramit® Fascia Stramit® Quad 115 (Victorian Pattern)	38 39-40
Quad Gutter 125, 150	41
Stramit® Ogee™ Gutter	42
Stramit® Fascia Gutter • Stramit® Fascia Capping	43
Stramit® Concealed Gutter	43
Stramit® Half Round Gutter • Flatback Gutter	44
Stramit® Easiflow Gutter	45
Fasteners	46
Stramit® Downpipe – Round	47-48
Stramit® Downpipe - Rectangular	49-50
CUSTOM FLASHINGS	
<u>Stramit® Custom Flashings</u> – Ordering Procedure	51
Stramit® Custom Flashings & Flat Sheet	52-57
RAINWATER ACCESSORIES & VENTILATION	
Crimped Bends • Rainheads • Sumps	<u>58</u>
Gas Flue Bolted Sleeve Vented Ridge	59
STRUCTURAL COMPONENTS	
Stramit® C & Z Purlins	60
Stramit® Exacta C & Z Purlins ZAM High Durability Purling . Cirta	61
ZAM High Durability Purlins + Girts Stramit® Custom Sections	62
Stramit* Custom Sections Stramit* Bridging General	64
Stramit® Bridging • Accessories	65-67
Purlins & Girts – General Accessories	68
Stramit® Condeck HP® & PrimeForm™	69

INDEX

Framing • Battens	70
Stramit® Top Hats	70
Stramit® Flooring • Accessories	71
Patio Roof Decking • Double-Sided Roofing	72
Colorbeam	73-74
FENCING PRODUCTS	
Fencing • Accessories	75-76
ROLLER DOORS AND ACCESSORIES	
Residential and Light Industrial Roller Doors	77
Residential Roller Doors	78
Residential Sectional Doors	79
Residential Sectional Door Installation	80
Novataur Residential, Commercial Roller Doors &	
Personal Access (PA) Doors	81
Roller Door Accessories	82
Roller Door Product Warranty	83
PREMIUM PRODUCTS	
Stramit® Roofing • Stramit® Cladding • Accessories	29-30
Stramit® MagnaFlow® - Roofing, Cladding, Rainwater	31
TERMS AND CONDITIONS OF SALE	84-87

CLAIMS FOR FAULTY GOODS, DAMAGED GOODS OR SHORT DELIVERY OF GOODS MUST BE LODGED WITHIN 48 HOURS OF DELIVERY.

ORDERS & INQUIRIES

MELBOURNE, GIPPSLAND, WESTERN DISTRICT

SALES ORDERS

KNOXFIELD **Tel (03) 9237 6300** Fax (03) 9237 6399 email: knoxfield.sales@stramit.com.au

TRANSPORT

KNOXFIELD Tel (03) 9237 6372 Fax (03) 9237 6371

ACCOUNTS 3/1464 FERNTREE GULLY RD,

KNOXFIELD 3180

KNOXFIELD Tel (03) 9237 6223 Fax (03) 9237 6388

email: creditvic@stramit.com.au

BENDIGO Tel (03) 5448 6400 Fax (03) 5447 9677 **ALBURY** Tel (02) 6092 3700 Fax (02) 6092 3766

IMPORTANT NOTICE

This publication sets out Stramit's standard supply terms. Resellers of Stramit products are under no obligation to follow Stramit's recommended retail pricing.

IMPORTANT NOTE – HANDLING & STORAGE Roofing and Cladding sheets when stored on site must be kept dry by storing under cover. Wet storage stains can occur from condensation, even in dry weather.

Technical details displayed in this book are a guide only. For further information please consult the relevant Stramit Technical Manual.

Delivery To Site Instructions

Customer Name:		5 1	ramn	
Project Name:				
Delivery Address:				
Site Phone Number:	[Map Ref:		
Contact person:	I	Mobile phone:		
1. Kilometres to nearest town:		KLMS to		
2. Site is: Rural	House		Commercial	Industrial
3. Site access surface is:	Bitumen	1	Gravel	Dirt/Grass
4. Does rain affect access to property:			Yes	No
5. Does peak hour traffic affect delivery:			Yes	No
6. Is the site affected by clearways:			Yes	No
7. Does the site have semi-trailer access: e.g. is there sufficient hard area to effect a 360			Yes	No
8. Are there powerlines/trees close to the e.g. restricting use of a truck mounted crane?	site:		Yes	No
9. Unloading method:			Crane on site	Forklift
	Truck m	nounted crane (l	HIAB)	By hand
10. Any other details that may assist drive	er			
Sketch map to site Show distance from nearest town, main road and	/or closest inter	eaction		
Show distance from hearest town, main road and	/or closest litters	Section		A
				Ţ
				N

Please note: delivery will be usually made by a semi trailer which at a minimum will be 18.7 metres long, 2.6 metres wide and may weigh up to 38 tonne gross.

Should delivery not be possible due to lack of information a redelivery charge may apply.

	-	nit.		FLASHII	NG D	ETAIL			CO:	
St	ran	1/T _® \	אר [⊥]	SPA					Date required:	
Customer	code:			Delivery address:					Time off:	
Customer:										
Cust O/N:				Special instructions	3:				Your ref:	
Date order	red:									
Product C	Code		Girth	Gauge	Product C	Code		Girt	h	Gauge
Qty.	Length mm	Fold	Finish		Qty.	Length mm	Fold	Finis	<u> </u>	
Mark Num			C F Taper (Length)		Mark Num				Taper (Length)	
Product C	ode		Girth	Gauge	Product 0	Code		Girt	n	Gauge
Qty.	Length mm	Fold	Finish		Qty.	Length mm	Fold	Finis	sh	

Mark all dimensions and specify degree of angles for all bends on the drawing.

Indicate side of colour with an arrow. Remember to read back the order.

Maximum length: 8.000m Minimum fold: 10mm

C F Taper (Length)

Mark Number

Freight Charge	FRSTORE	FRSITE	FRSPEC	\$ Page 1 of
· ·				

Mark Number

C F Taper (Length)



3/1464 Ferntree Gully Rd KNOXFIELD VIC 3180 Telephone (03) 9237 6300 Facsimile (03) 9237 6399

Bridging - 1

Page	of		
ob No.	Purch.	Order	No.

	i acsiiiile (i	03) 9237 0	399			
Customer		Projec	t		 Bridging	System
Delivery address					 1	& Strut/
Del. Date	Finish		Drawn	Date	Stramit	Bridging

Delivery address						Rod & Strut/
Del. Date	Finish		Drawn		Date	Stramit Bridging
INTERMEDIATE FIXED BRIDGING ASSEMBLIES	Instructions		•		Roof Pitch	RIDGE/INTERMEDIATE BOLTED BRIDGING ASSEMBLIES Adjustable Fixed
Stramit - lock/locator	Part No. No.	Bracket Size	Purlin Centres	No. Reqd.	Mark No.	Stramit - locator/lock Part No. 007 Part No. 008 Stramit - lock/lock
Part No. 001 Stramit - lock/lock						Part No. 009 Part No. 010 Stramit - locator/locator
Part No. 002 Stramit - locator/bolted						Part No. 011 Part No. 012 Stramit - locator/bolted Part No. 013 Part No. 014
						Stramit - lock/bolted Part No. 015 Part No. 016 Strud & Rod - bolted/bolted
Part No. 003 Stramit - lock/bolted						Part No. 017 Part No. 018
Part No. 004						FASCIA BRIDGING ASSEMBLIES Fascia Size Stramit - locator
Strut & Rod						Part No. 019 Stramit - lock
Part No. 005 Starter Clip						Part No. 020 Stramit - locator/lock Part No. 021
Part No. 006 Purlin Size No. Reqd						Stramit - lock/lock Part No. 022
	INSTA	LL BRIDGING	G IN DIRECT	ION OF LOC	CATOR	Strut & Rod Part No. 023



3/1464 Ferntree Gully Rd **KNOXFIELD** VIC 3180 Telephone (03) 9237 6300 Facsimile (03) 9237 6399

Bridging - 2

Page	of
Job No.	Purch. Order No.

		Pro	ject				Bridging S Rod & S	
Delivery address Del. Date	Finish		Drawn		Date		Stramit Br	
GIRT STOOL/FOOT ASSEMBLIES	Part No.	Bracket Size	Purlin Centres	No. Reqd.	Mark No.		RT HANGER SSEMBLIES	Tie Rod
Part No. 024 Stramit - locator Part No. 024 Stramit - lock Part No. 025 Strut & Rod Part No. 026 Raking Girt Bracket						Part No. 027	Part No. 02 Stramit - lock Part No. 03 Part No. 03	330
No. Reqd. Tie Rod Angle						35 7 0 0	Purlin Size	No. Reqd.
No. Reqd. Tie Rod Assemblies		Size	Length	No. Reqd.	Mark No.	Clamp Plate	Purlin Size	No. Reqd.

3/1464 Ferntree Gully Rd KNOXFIELD VIC 3180

Purlins/Girts

age	of		
No.	Purch.	Order	No.

Telephone (03) 9237 6300 Facsimile (03) 9237 6399 Customer Project Purlin Section C/Z Delivery address Del. Date Finish Drawn Date Mark No. Hole Centres (d) **Total Metres** Overall Length No. Required 60 70 110 160 210 260 As Drawn 40 60 70 | 110 | 160 | 210 | 260 Opp. Hand Mark No. Overall Length No. Required Hole Centres (d) **Total Metres** 40 | 60 | 70 | 110 | 160 | 210 | 260 | As Drawn 40 60 70 | 110 | 160 | 210 | 260 Opp. Hand Mark No. **Total Metres** Overall Length No. Required Hole Centres (d) 60 160 | 210 | 260 As Drawn 70 110

0рр.	Hand				40	60	70	110	160	210	260		
l e	-												-
d		 	 	 	 			 				 	

Stramit.

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

IMPORTANT NOTICE

It is the Customer's responsibility to advise Stramit at the time of ordering if the order is for **COLORBOND®** Ultra steel or **COLORBOND®** steel Matt.

Unless this notification is made at the time of order (in writing) then the order will be supplied as COLORBOND® steel (XRW).

EG. An order for **Surfmist**® will be supplied as COLORBOND® steel (XRW) in the colour Surfmist® IN ALL **INSTANCES UNLESS IDENTIFIED** OTHERWISE.

EG. To order COLORBOND® Ultra steel in the colour Surfmist® the order must clearly state COLORBOND® Ultra steel in Surfmist®.

PRODUCTION DAYS

TO ORDER

Refer to the schedule below and order before 4pm the day before production day and at least 2 days before intended delivery day (4 days on some items).

NOTE:

Some products are only run on specific days.

Refer local branch for further details.

PRODUCT	MON	TUES	WED	THURS	FRI
Stramit® Corrugated Curving		d time for c			
Stramit Mini Corry®	supplied e	x NSW, allo	w 10 worki	ng days lead ti	me
Tank Iron	allow 7 wo	orking days	lead time		
Stramit® Flooring			•		
Stramit® 120mm Top Hat	allow 10 w	orking days	lead time, o	other sizes daily	1
Standard Purlins	lead time of	of 5 days			
Downturn Lip Purlins				By negotiation	•

All products except those listed above are manufactured on a daily basis.

6

Standard holes: 18mm x 22mm slots.

Indicate web, flange holes and dimensions from hole to hole



TEL (03) 9237 6300 FAX (03) 9237 6399

тг

TEL (02) 6092 3700 FAX (02) 6092 3766

ALBURY 02) 6092 3700

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

STANDARD DELIVERY CHARGES

- 1. Any customer who has exceeded their Credit Limit or whose payments are overdue may experience delays in the manufacture and delivery of goods ordered.
- 2. Due to transport limitations the maximum length of rainwater goods is 9.5m.
- 3. Customers/receivers are responsible for unloading. Stramit's terms are "On lorry at site or store".
- 4. UNATTENDED SITES Stramit drivers will endeavour to effect delivery as close to site as possible. In these instances Stramit will not accept claims for damage to product during unloading nor claims for pilfering of part or all of the delivery made.
- 5. Country loads subject to POA dependant on product length, quantity and delivery site restrictions in certain country areas
- 6. Albury/Wodonga local area is at metro rate.

	Product Length / Delivery Cost Guide												
LENGTH	CODE	COST PER DELIVERY	ESCORT REQ'D	AREA									
Rollerdoors Up to 13.500 Up to 13.500 Up to 13.500 13.501 - 18.000 18.001 - 20.500 20.501 - 25.000 25.001 - 30.000 30.001 - 35.000 Early Del time Freight store Urgent Fee Special delivery Escorts Courier Fee Curved Sheets over 7m or 90°	FR4RDVIC FRSITE FR4SITEM FR4SITEN FR4SITE198 FR4SITE215 FR4SITE2425 FRSPEC FRSPEC FREARLY FRSTORE URGENTFEE FRSPEC FRESCORT FRCOURIER FRSPEC	POA POA POA POA POA POA POA POA POA POA	- - 1* 2* 2* 2* - - -	Vic Roads									

The rates shown are for delivery in normal business hours. Deliveries outside normal business hours, or at weekends - POA

Packaging

Standard packs will be used. If special packing is required by customer, please specify at time of order.

Timber Crates

Flat Sheet Crate Packaging Charge POA. Maximum length 6 metres.

Escort Costs

*Escort charges depend on the length of product transported and are additional to Delivery Charge POA.

Hi-Ab Facility

Hi Ab deliveries cannot be guaranteed on all consignments.

If a Hi Ab must be used please discuss with Stramit staff at time of order placement.

Maximum length 13.5m/maximum lift 1 tonne. Lengths over 13.5m requires a crane on site.

(please note this facility is additional to other charges)

Ordering Product

Order close off is 12.30pm daily for 24 hour and stock product, 4pm for 48 hour product and purlin lead times. (Made to measure roofing and rainwater products will be delivered 48 hours).

ORDERS PLACED AFTER THESE DEADLINES WILL BE TREATED AS ORDERS BEING RECEIVED THE NEXT DAY.

Demurrage

Unloading at customers premises or site in excess of one(1) hour will be charged at the rate of \$110 per hour or part thereof.

Redelivery

Product refused at the original delivery and requested to be redelivered will incur a minimum charge of **\$170** over and above the standard delivery charges.

Stramit.

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

DELIVERY INFORMATION

Specific Delivery Times

Specific delivery times can be arranged when placing the order, subject to local service offer. Simply request an "on site time" and your delivery time and day will be confirmed. Special delivery times outside normal working hours will incur additional charges and these should be established at the time of placing the order.

Crane Offs must be specified and pre-arranged.

Requests for tray truck deliveries may be subject to longer lead time or special prices. Over dimensional vehicle deliveries before 10.30am are subject to time and weather prohibitions beyond our control including a prohibition on loads over 17.5m from 6am to 9am Mon - Fri.

Minimum Purchase Surcharge

Minimum order value \$100 (excluding GST), a handling fee of \$25 (plus GST) will be added to orders below \$100.

Delivery Conditions

All deliveries will be in accordance with local Council or site requirements.

Driver is solely responsible for unloading if:

- Can be handled by the driver alone.
- Can be craned off to ground level using truck mounted crane (max product length 13.5 metres).

Customer responsible for unloading if:

- Product over 13.5 metres long.
- · Product exceeds truck mounted crane reach and loading.

Product Return

Stock items may be returned for credit, with Stramit's approval, subject to the following charges and conditions:

- i) Where goods are returned by the customer, a re-stocking fee of 20% (\$20 minimum) is applicable.
- ii) Where goods are picked up by Stramit for return, standard delivery charges plus a re-stocking fee of 20% (\$45 minimum) are applicable. Damaged goods will not be accepted for credit.
- iii) Returns should be no later than 7 days after delivery date.

Non stock items, including cut to length products, are NOT RETURNABLE.

Customer Pick Ups

Knoxfield

Wide range of stock length downpipe, gutter and accessories available ex stock for immediate pick-up. Cut to length product available to order. Check stock availability when placing order. Specify requirement and check stock availability when placing order. Pick-up time 6.00am to 4.00pm weekdays.

Albury

Open for customer pick-ups of all goods between the hours of 7.00am and 4.00pm weekdays. Ask for details of stock availability when placing order.

Bendigo

Open for customer pick-ups of all goods between the hours of 8am to 4.30pm weekdays. Ask for details of stock availability when placing order.

Prior arrangements for pick-ups must be made with our sales office. Where the customer arranges his own carrier, all charges must be direct to the customer's account.


Stramit will not accept charges from carriers unless agreed with the customer at the time of placing the order.

Refer to Terms & Conditions on inside back cover.

• Customer supplied safe lifting device MUST be used.

METROPOLITAN & SOUTHERN VICTORIA TEL (03) 9237 6300 ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766 **BENDIGO** TEL (03) 5448 6400 FAX (03) 5447 9677



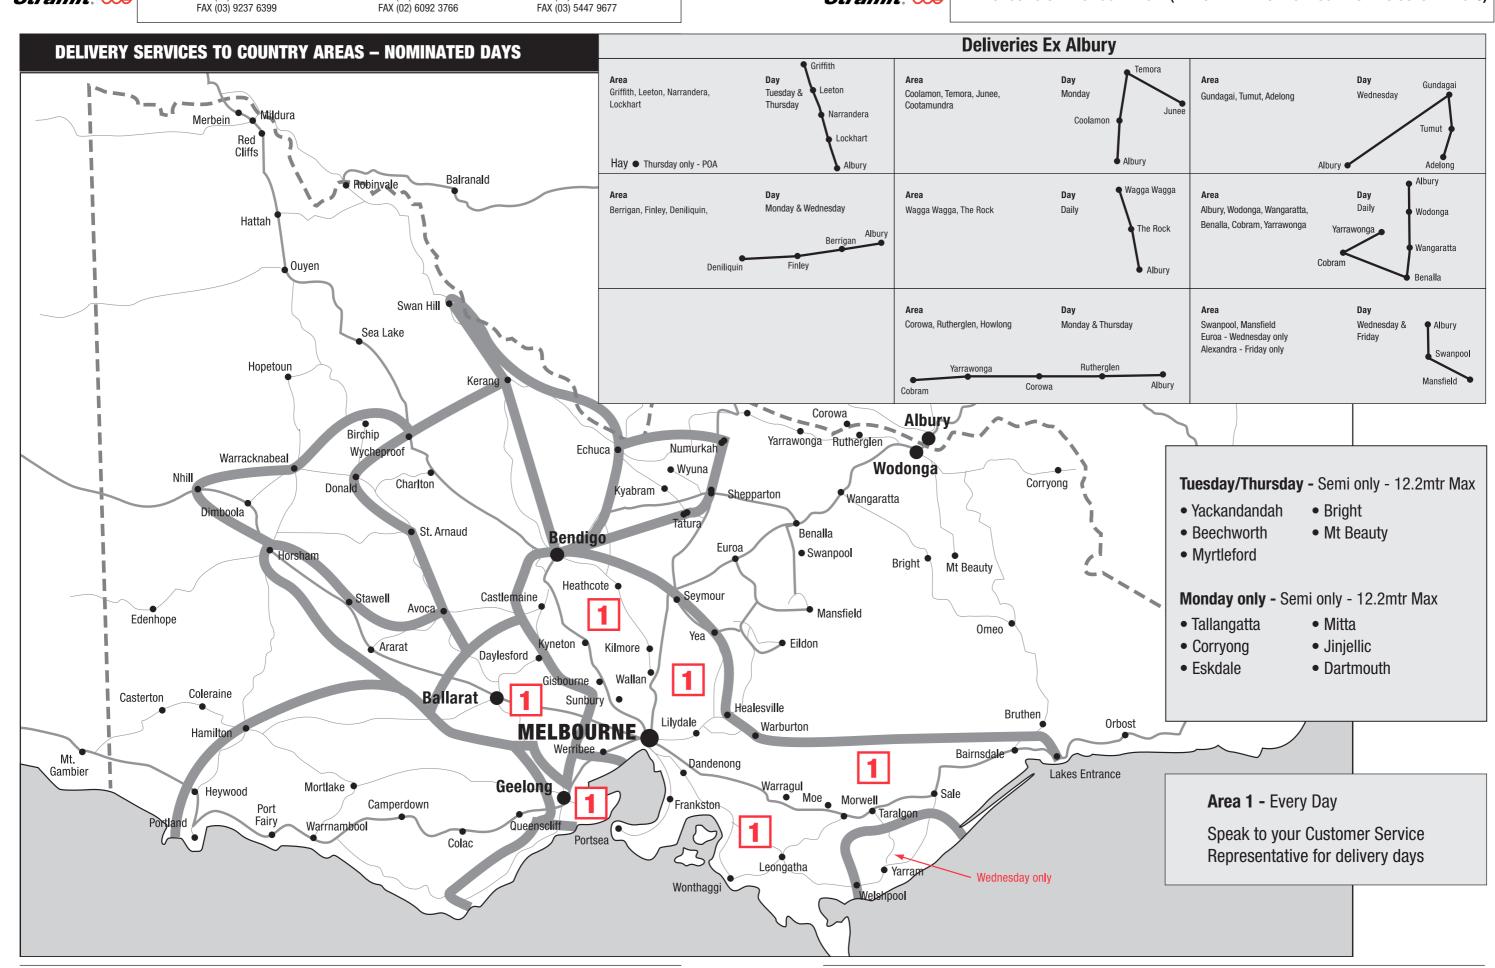

Subject to change without notice



TEL (03) 9237 6300 FAX (03) 9237 6399 TEL (02) 6092 3700

FAX (02) 6092 3766


BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677


LOADING REQUIREMENTS



OVERHANG LIMITS

THE DRIVER'S **VISION MUST NOT BE OBSTRUCTED**



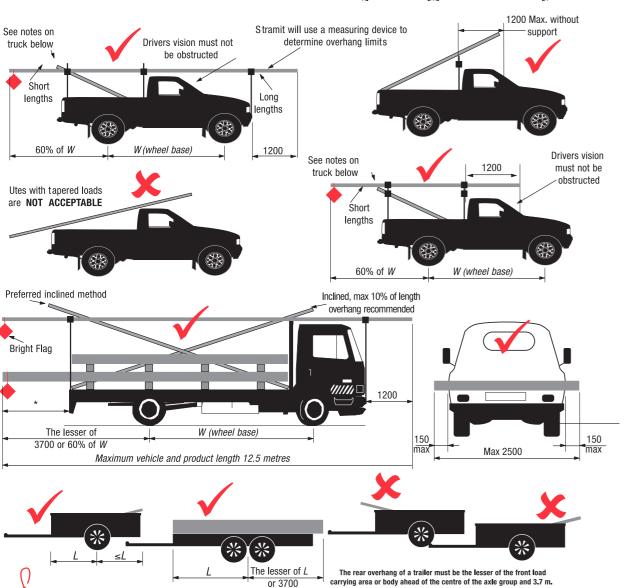




PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

LOADING REQUIREMENTS



SECURE YOUR LOAD!

DO NOT USE OCCY STRAPS OR FLEXI STRAPS

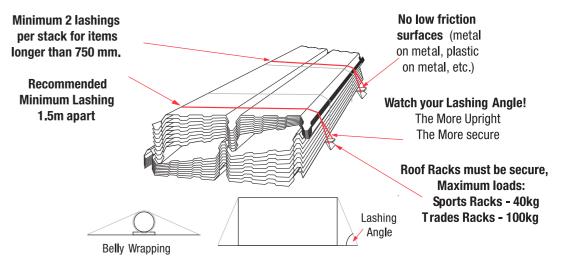

*SEE THE TRANPORT SAFETY GUIDELINE OWNER PICK UPS FOR FURTHER INFORMATION

VEHICLES CONSIDERED INAPPROPRIATE **CANNOT BE LOADED!** YOUR SAFETY IS OUR CONCERN

The information presented is for guidance only and compliance with applicable laws and standards remains your responsibility

Table 1 - Lashing Requirements

Lashing Angle to Horizontal ∠	25 mm hand tightened webbing	25 mm ratchet webbing	35 mm ratchet webbing	8 mm synthetic rope with single hitch
60 to 90°	52 kg per strap	170 kg	430 kg	87 kg per rope
45 to 60°	46 kg per strap	140 kg	350 kg	71 kg per rope
30 to 45°	30 kg per strap	100 kg	250 kg	50 kg per rope
15 to 30°	15 kg per strap	52 kg	130 kg	26 kg per rope

Key Assumptions in Tables 1

- 1. All lashings are fully tensioned. If not, then more lashings may be required.
- 2. No low friction surfaces (e.g. steel on steel, plastic on plastic, plastic on steel, etc.)
- 3. A minimum static coefficient of friction of $\mu = 0.40$ is achieved under all products and between layers of a load. (e.g. rubber or timber against steel or plastic).
- 4. Round loads require belly wrapping and extra restraints

12

A 450MM SQUARE BRIGHT RED FLAG IS REQUIRED ON ANY OVERHANG THAT CANNOT BE EASILY SEEN



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

			PR	0D	UC	T A	W	\IL	AB	ILľ	TY	-	FIN	IIS	H	AN	D (COI	LOI	UR								
Product	BMT mm	ZA G550S	ZA G300S	GAL Z275	GAL Z450		BAS	CLC	COV	CTG	DOC	DUN	EVH	GLY	IST	JAS	MGV	MNR	MON	NTS	PEC	PPB	SHG	SUR	TRN	WDG	WLB	WSP
Stramit Speed Deck Ultra®	0.42	~			'		/	/	/	/	'	>	'	/	/	>	/	>	>	/	/	/	~	/	/	'	~	'
	0.48	~					'	'	'	'	'	/	'	'	'	/	/	/	/	/	'	'	'	'	'	~	'	'
Stramit Corrugated/	0.35	~					/	/	~	/	/	'	/	/	~	'	~											
Stramit Monoclad	0.42	~			~		/	'	/	/	'	/	'	/	/	/	/	/	/	/	/	/	/	/	/	~	'	~
	0.48	~					/	'	/	/	'	/	'	/	/	/	/	/	/	/	/	/	/	/	/	~	'	~
Stramit® Curving Quality	0.60		~		~		'		'		'			'			/	/	'	~	'	'	'	'	'	~	'	
Tank Iron Z600	0.60					~																						
									T	ank	lron .	rolle	d at i	Кпох	field	on 1	uesa	lays	only									
Stramit Longspan®	0.42	~			~		'	'	'	'	'	/	'	'	'	/	/	/	/	~	'	'	'	'	'	~	'	~
	0.48	~					'	'	'	'	'	'	'	'	~	'	~											
Stramit Monopanel®	0.48	~		~			'	'	~	'	'	'	'	'	~	'	~											
Stramit Minirib®	0.42																											
				Mir	i Coi	rry so	ource	ed ex	Syd	ney,	allov	v 10	days	ext	ra lea	ad tii	ne, s	ubje	ct to	min	imur	n ord	ler q	uant	ity			
Stramit Mini Corry®	0.42																											
				M	liniril	b sou	rced	ex S	ydne	ey, a	llow	10 d	ays e	extra	lead	l time	e, su	bject	t to n	ninin	num	orde	r qua	antity	y			
Stramit Sharpline® Direct Fix	0.45						'	'	'	/	'	/	/	'	V	/	/	/	/	~	~	/	/	/	'	'	'	~
Stramit Sharpline® Clip Fix	0.45						'	'	'	/	'	/	'	'	/	/	/	/	/	/	/	/	'	/	'	'	'	~
Stramit K-Panel®	0.35	~					'	'	'	~	'	/	'	'	'	/	/	~	~	~	'	~	'	~	'	'	'	~
	BMT mm	ZA G550S	ZA G300S	GAL Z275	GAL Z450	GAL Z600	BAS	CLC	COV	CTG	DOC	DUN	EVH	GLY	IST	JAS	MGV	MNR	MON	NTS	PEC	PPB	SHG	SUR	TRN	WDG	WLB	WSP

FIBREGLAS	S COLOURS	POLYCARB CO	LOURS			
CLR OPA HGN	Clear Opal Haze Green	CLR GRY OPL	Clear Grey Opal	LBZ DKT	Light Bronze Dark Tint	

			STD XRW COLOUR		
BAS	Basalt®	IST	Ironstone®	SHG	Shale Grey™
CLC	Classic Cream™	JAS	Jasper®	SUR	Surfmist®
COV	Cove®	MGV	Mangrove®	TRN	Terrain®
CTG	Cottage Green®	MNR	Manor Red®	WDG	Woodland Grey®
DOC	Deep Ocean®	MON	Monument®	WLB	Wallaby®
DUN	Dune®	NTS	Night Sky®	WSP	Windspray®
EVH	Evening Haze®	PEC	Pale Eucalypt®	GAL	Galvanised
GLY	Gully®	PPB	Paperbark®	ZA	ZINCALUME® steel

BMT - Base Metal Thickness.

▲ Subject to minimum set purchasing quantities and lead times

✓ Normal stock item

✓* 100 x 50mm only



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

PRODUCT AVAILABILITY – FINISH AND COLOUR

Product	BMT	ZA	ZA	GAL	BAS	CLC	COV	CTG	DOC	DUN	EVH	GLY	IST	JAS	MGV	MNR	MON	NTS	PEC	PPB	SHG	SUR	TRN	WDG	WLB	WSP
	mm	G550S	G300S	Z275																						
Stramit® Fascia Board	0.42	~			/	~	~	~	~	~	~	•	/	~	'	~	/	>	•	~	~	~	~	~	•	~
Stramit® Flashings	0.55		~	~	/	~	~	~	~	~	~	~	/	~	~	~	/	/	/	~	~	~	'	~	~	~
	0.75		~	~																						
	0.95		~	~																						
	1.20		~																							
Stramit® Soft Roll Top Ridge	0.55				~					~							~				~			~	/	
Stramit® Roll Top Ridge	0.42	~		~	>	~	~	~	~	~	/	/	>	~	~	~	>	>	/	~	~	~	'	~	/	1
Stramit® Fascia Gutter	0.42	~		~	>	~	~	~	~	~	~	/	>	~	~	~	>	>	/	~	~	~	'	~	/	~
Stramit® Easiflow/Stramit® Capping	0.42	~																								
& Barge Soaker	0.48				/	~	~	~	~	~	~	~	/	~	~	~	/		/	~	~	~	'	~	~	~
Stramit O-Gee™ Gutter	0.55		~	~	~	~	~	~	~	~	~	~	~	~	~	~	~		~	~	~	~	~	~	~	~
Stramit® Quad 115 - Vic	0.42	~		~	~	~	~	~	~	~	~	/	/	~	~	~	/	/	/	~	~	~	~	/	/	~
Stramit® Downpipe:																										
Rectangular	0.40		~	~	/	~	~	~	~	~	~	~	>	~	~	~	>	>	/	~	~	~	'	~	~	~
Round under 75mm	0.40		~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	*	~	~	~	~	~	~	~	~
Round over 75mm	0.55		~	~		~		~	~	~	~		~	~		~	~		/	~	~	~		~		~
Stramit® Top Hat	0.75	~																								
	1.00	~																								
Stramit® Roof Batten	0.48	~																								
						-			-	-		Sto	ck le	ngth	only											
Stramit® Garage Barge	0.40		~	~	~	~	~	~	'	~	'	~	~	~	~	~	~	/	~	~	~	~	~	~	/	~
Stramit® Valley	0.40		~	~	~	~	~	~	/	~	~	~	~	~	~	~	~	/	~	~	~	~	~	~	/	/
Product/Roofing/Cladding	BMT	ZA	ZA	GAL	BAS	CLC	COV	CTG	DOC	DUN	EVH	GLY	IST	JAS	MGV	MNR	MON	NTS	PEC	PPB	SHG	SUR	TRN	WDG	WLB	WSP
	mm	G550S	G300S	Z275																						

			STD XRW COLOUR		
BAS	Basalt [®]	IST	Ironstone®	SHG	Shale Grey™
CLC	Classic Cream™	JAS	Jasper®	SUR	Surfmist®
COV	Cove®	MGV	Mangrove®	TRN	Terrain®
CTG	Cottage Green®	MNR	Manor Red®	WDG	Woodland Grey®
DOC	Deep Ocean®	MON	Monument®	WLB	Wallaby [®]
DUN	Dune®	NTS	Night Sky®	WSP	Windspray®
EVH	Evening Haze®	PEC	Pale Eucalypt®	GAL	Galvanised
GLY	Gully®	PPB	Paperbark®	ZA	ZINCALUME® steel

BMT - Base Metal Thickness.

▲ Subject to minimum set purchasing quantities and lead times

✓ Normal stock item

✓* 100 x 50mm only

METROPOLITAN & SOUTHERN VICTORIA TEL (03) 9237 6300

TEL (02) 6092 3700 FAX (02) 6092 3766


BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

FAX (03) 9237 6399

Hints and tips to achieve maximum life from your COLORBOND® steel / ZINCALUME® steel product.

- COLORBOND® steel / ZINCALUME® steel used in areas not washed by rainfall should be cleaned down at regular intervals.
- Brick cleaning acid must not be allowed to contact steel fascia, gutter or roofing and walling.
- Never immerse COLORBOND® steel / ZINCALUME® steel in sand. soil or concrete.
- Do not use "touch-up" spray can on COLORBOND® steel.
- Avoid "swarf" damage remove metal debris from cutting and/or drilling.
- Keep material dry and clear of the ground when in bundles prior to installation.
- Prepainted metal roofing components are often supplied with a protective plastic film. This can be affected by sunlight and should be removed as soon as practicable. Removal can be difficult, if not impossible, if exposed to sunlight for prolonged periods.
- Contact with dissimilar metals and run-off from dissimilar metals such as Copper, lead, etc must be avoided.
- Roofing and guttering need to be free draining and free from the accumulation of dirt or leaves.

Water Flow Guide Chart

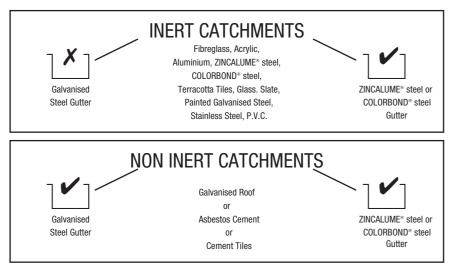

16



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

MIN/MAX PRODUCT LENGTH DETAILS BY BRANCH

	KNOX	FIELD	ALB	URY
PRODUCT	MIN LENGTH	* MAX LENGTH	MIN LENGTH	MAX LENGTH
Sheeting				
Stramit® Speed Deck Ultra	0.5m	28m		
Stramit® Corrugated	0.5m	24.5m	0.45m	19m
Stramit® Curving Quality	0.5m	15m		
Stramit Monoclad®	0.5m	24.5m	0.4m	19m
Stramit Longspan®	0.5m	24.5m		
Stramit Minirib®	0.6m	8m		
Stramit K-Panel®	0.4m	6m		
Stramit Monopanel®	0.6m	6m		
Stramit® Sunset Decking	1.2m	9m		
Stramit® Mini Corry	0.6m	6m		
Rainwater				
Stramit® O-Gee Gutter	0.8m	9.5m		
Stramit® Fascia Board	0.4m	9.5m	0.8m	9.5m
Stramit® Fascia Gutter	0.55m	9.5m		
Stramit® Fascia Capping	0.55m	9.5m		
Stramit® Fascia Cover	0.6m	9.5m		
Stramit® Quad 115 Gutter	0.6m	9.5m	0.8m	9.5m
Stramit® Quad 125 Gutter	1m	9.5m		
Stramit® Easiflow	1m	9.5m		
Stramit® Barge Gutter	0.55m	9.5m		
Stramit® Flashings	0.6m	8m	1m	9.5m
Stramit® Half Round Gutter	1m	9.5m		
Stramit® Flat Back Half Round Gutter	1m	9.5m		
Other				
Stramit® Valley Ribbed	0.35m	9.5m		
Stramit® Valley Folded	0.3m	8m	1m	8m
Stramit® Roll Top Ridge	0.6m	9.5m	0.8m	9.5m
Stramit® Garage Barge	1m	7.5m		
Stramit® Condeck HP	0.6m	15m		
Stramit® Purlins	1.7m	18m		
Stramit® Top Hat 64	1.5m	13m		
Stramit® Top Hat 50, 75, 96	0.7m	13m		
Stramit® Stud 75	0.3m	10m		

^{*} Dependant on colour due to expansion



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY

TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO

TEL (03) 5448 6400 FAX (03) 5447 9677

QUICK ROOFING ESTIMATE - HIPPED ROOF TAKE-OFF

The table of Roof Slope Factors below allows quick calculations of roof area, sheet length and hip length.

These methods are for quick estimating purposes only. Accurate measurements must be taken from the actual roof frame before ordering roofing and rainwater products.

As an example, take a typical hipped roof where all four roof sections have the same slope (30°) and all hips are of equal length.


Typical hipped roof (roof slope = 30°)

ROOF AREA

First determine the area of the roof plan by multiplying the length of the roof by the width. Before making the calculation, add gutter overhangs of 50mm. In this case, there are gutters on all four sides. To find the area of the hipped roof, simply multiply this plan area by the Roof Slope Factor for Roof Area. The same method is used for gable roofs.

$$\overline{19.1 \times 8.1} = 154.7 \times 1.155 = 178.7$$

Therefore, roughly 179m² of sheeting will be needed to cover the roof. On complex roof shapes, extra may need to be added to allow for wastage.

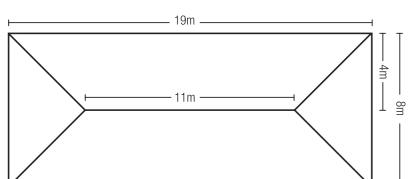

SHEET LENGTH

On the roof plan, measure the distance from the line of the ridge to the outside edge of the fascia, which in the example is half the span or 4000mm. Multiply this measurement by the Sheet Length Roof Slope Factor to find the length of the sheet required to span from the ridge to the fascia. Note that all roof sheeting must extend at least 50mm beyond the fascia line to provide gutter overhang.

 $4000 + 50 \times 1.155 = 4678$ mm

HIP CAPPING

To find the length of ridge capping required to cover one hip, measure the distance from the ridge line to the fascia on the roof plan (here 4000mm) add the gutter overhang and multiply by the Hip Length Roof Slope Factor for 30°. Multiply by 4.

 $4000 + 50 \times 1.528 \times 4 = 24.8 \text{m}$

RIDGE CAPPING

For hipped roofs where all sides have the same slope, the length of the top ridge is equal to the length of the roof plan minus the width, regardless of slope. Add 5% to all capping to allow for laps.

 $\overline{19 - 8 = 11 + 5\% = 11.55m}$

ROOF SLOPE FACTORS

Roof Slope (degrees)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Roof Area/Sheet Length	1.000	1.001	1.001	1.002	1.004	1.006	1.008	1.010	1.012	1.015	1.019	1.022	1.026	1.031	1.035
Hip Length	1.414	1.415	1.415	1.416	1.417	1.418	1.420	1.421	1.423	1.425	1.428	1.430	1.433	1.436	1.439

Roof Slope (degrees)	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Roof Area/Sheet Length	1.040	1.046	1.051	1.058	1.064	1.071	1.079	1.086	1.095	1.103	1.113	1.122	1.133	1.143	1.155
Hip Length	1.443	1.447	1.451	1.456	1.460	1.465	1.471	1.477	1.483	1.489	1.496	1.503	1.511	1.519	1.528

Roof Slope (degrees)	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
Roof Area/Sheet Length	1.167	1.179	1.192	1.206	1.221	1.236	1.252	1.269	1.287	1.305	1.325	1.346	1.367	1.390	1.414
Hip Length	1.537	1.546	1.556	1.567	1.578	1.590	1.602	1.616	1.630	1.644	1.660	1.677	1.694	1.712	1.732

Roof Slope (degrees)	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
Roof Area/Sheet Length	1.440	1.466	1.494	1.524	1.556	1.589	1.624	1.662	1.701	1.743	1.788	1.836	1.887	1.942	2.000
Hip Length	1.753	1.775	1.798	1.823	1.849	1.877	1.907	1.939	1.973	2.010	2.049	2.091	2.136	2.184	2.236

18



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

				id 100ii	PRODU	01				
Product/Roofing/Cladding	Page	BMT	Steel	Cover Width	Minimum	ı İn	Roof It Span	Span End Span	Wal Int Span	I Span End Spar
G300 – Mild Steel G550 – Hi-Tensile Steel	raye	DIVIT	Grade	mm	Pitch		mm	mm	mm	mm
Stramit® Corrugated	20	0.42	G550	762	5 Degrees		1200	1000	2600	2150
16mm		0.48	G550		(1 in 12)		1600	1300	2850	2350
762mm (±4mm) Cover		Fixing	screw re	equired 3/sheet	/batten					
Stramit® Curving Quality	22	0.60	G300	762			1200	1000	2700	2250
Tank Iron Z600		0.60	G300	610			-	-	-	-
762mm (±4mm) Cover		Fixing	screw re	quired 3/sheet	/batten					
Stramit Monoclad®	24	0.35	G550	762	†		t	t	3000	2500
29mm		0.42	G550		2 Degrees		1700	1400	3000	2500
<u> </u>		0.48	G550		(1 in 27)		2300	1900	3000	2500
762mm (±4mm) Cover		Fixing	screw re	equired 4/sheet	/batten					
Stramit Longspan®	26	0.42 0.48	G550 G550	700	3 Degrees (1 in 20)		2100 2700	1750 2250	3000 3000	2500 2500
700mm (±4mm) Cover		2 degr Fixing	ee minin screw re	num pitch resi equired 3/sheet	dential only. /batten	•				
Stramit Speed Deck Ultra®	27	0.42	G550	700	1 Degree	<u> </u>	2100	1750	3000	2500
43mm		0.48	G550		(1 in 60)		2700	2250	3000	2500
700mm (±4mm) Cover		Fixing	clips req	uired 1/sheet/b	atten					
Stramit Mini Corry®	31	0.42 0.48	G550 G550	825	†		† †	† †	1200 1300	1000 1050
		0.40	นออบ		†		ı	'	1300	1050
		Fixing	screws r	required 7/shee	t/batten					
Stramit Minirib®	31	0.42	G550	900	†		†	†	1500	1250
		Fixi	ng screw	s required 4/sl	neet/batten					
Stramit K-Panel®	31	0.35	G550	864	t		t	t	1500	1250
		0.42	G550	864	†		†	†	1700	1400
		Fixing	screw re	quired 4/sheet	/batten					
Stramit Monopanel®	32	0.48	G550	250	t		†	t	3000	2500
<u>↓</u>		Fixing	screws r	required 1/shee	t/batten					
Stramit SharpLine® Direct Fix - 25mm	32	0.55	0.6		6.14	3 Degree			1200	950
- 38mm		0.55 0.55	0.6		5.45 6.72	3 Degree 3 Degree			600 1200	450 950
		0.55	0.6	0 465	5.74	3 Degree			600	450
				= 1/sheet/batte		(1 in 20)			1000	055
Stramit SharpLine® Clip Fix - 25mm	32	0.55 0.55	0.6		5.56 5.13	3 Degree 3 Degree			1200 600	950 450
- 38mm		0.55	0.6	0 285	6.25	3 Degree			1200	950
Fixing screws	require	0.55 d = 2 pe	0.6 r clip for	0 485 both metal & t	5.50 imber	3 Degree (1 in 20)		350	600	450
Stramit Sunset® Deck	70	0.42	G550	290	1 Degree rees greater	}	2300	4500	2900	4300
				(Հ ԱԵՑ	iooo yidaldi	uiaii 4111)				

BMT Base Metal Thickness. This is thickness of steel only and together with minimum yield strength and rolled profile provides the basis for calculation of the structural needs of a system. It should be referred to in specifications followed by the letters BMT. 10 † NOT suitable for roofing.

For N1 wind conditions and normal duty foot traffic

• Installation of wall sheets is not to include concrete slab poured against wall sheeting.



METROPOLITAN & SOUTHERN VICTORIA TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

			00000		
	ROOFING • CLA	DDING • A	CCESSO	RIES	
roduct Roofing/Cladding/Accessories	Details	Code	Finish	BMT	Unit
tramit® Corrugated	Hi Tensile G550	C42ZA	ZA	0.42	per m²
	17.	C48ZA	ZA	0.48	per m²
16mm		**C42T	MATT	0.42	per m²
<u>+</u> ////////////////////////////////////		**C48T	MATT	0.48	per m²
↑ 762mm (±4mm) Cover		C42X	COL	0.42	per m²
		C48X	COL	0.48	per m²
		**C42ZM8	ZM8	0.42	per m²
		**C48ZM8	ZM8	0.48	per m²
		**C42U	Ultra	0.42	per m²
		**C48U	Ultra	0.42	per m²
		C42GA	Z450 GA	0.42	per m²
		To convert to line	ear metres mu	ultiply by (0.762
* Stramit® Corrugated also available	in the BlueScope Steel Premium	Products range of	colours for sev	ere enviro	nnments, refer page 30
Vall Cladding	Acoustic Perf.	C42IOWHP11	COL	0.42	per m²
		Available in Off W	/hite only		
		Project base mate	erial, min orde	r 1 tonne.	Allow extra lead time.
engths under 1.2m incur a cutting ch	narge	CUTBACKLTH			each
Franslucent Roof Sheeting	Fibreglass	TSFGC12	1200gsm (4	loz)lin me	tre
Suit Stramit® Corrugated sheeting	CLR, OPA, HGN	TSFGC18	1800gsm (6		
	- , - , -	TSFGC24	2400gsm (8	-	
	Lengths over 11.6m incur extra Allow 3 working days for delive	a delivery charges, (,	
	Polycarbonate CLR, GRY, OPL, LBZ and DKT	TSPCCLL	(0.80mm)	lin	metre (not CTL)
	Available in standard lengths of	nly: 1.8, 2.1, 2.4, 2	.7m, 3.0m, 3.3	3m, 3.6m,	3.9m, 4.2m, 4.8m, 5.4m, 6.0m
		nly: 1.8, 2.1, 2.4, 2. TSPC1SHOTPK	.7m, 3.0m, 3.3	3m, 3.6m,	3.9m, 4.2m, 4.8m, 5.4m, 6.0m per 50
	Available in standard lengths of 12 x 50 Polycarb Screws		.7m, 3.0m, 3.3	3m, 3.6m,	
		TSPC1SH0TPK	.7m, 3.0m, 3.3	3m, 3.6m,	per 50
asteners A	12 x 50 Polycarb Screws	TSPC1SHOTPK TSPC1SHOTT	.7m, 3.0m, 3.3	3.6m,	per 50 per 250
asteners (huvenumum)	12 x 50 Polycarb Screws Anti Noise Stop Tape	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200			per 50 per 250 per 50
	12 x 50 Polycarb Screws Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber)	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174	plain colour head		per 50 per 250 per 50 per 1000 per 1000
	12 x 50 Polycarb Screws Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4	plain colour head plain		per 50 per 250 per 50 per 1000 per 1000 per 1000
	12 x 50 Polycarb Screws Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber)	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174	plain colour head		per 50 per 250 per 50 per 1000 per 1000
	12 x 50 Polycarb Screws Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4	plain colour head plain		per 50 per 250 per 50 per 1000 per 1000 per 1000
	12 x 50 Polycarb Screws Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek (crest fixing to steel)	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4 S1239HAT4	plain colour head plain colour head	1	per 50 per 250 per 50 per 1000 per 1000 per 1000 per 1000
	12 x 50 Polycarb Screws Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek (crest fixing to steel) 10x16 Hex Head SD	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4 S1239HAT4 S1016HT4	plain colour head plain colour head plain	1	per 50 per 250 per 50 per 1000 per 1000 per 1000 per 1000
	12 x 50 Polycarb Screws Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek (crest fixing to steel) 10x16 Hex Head SD (valley fixing to steel) 10x16 Wafer Teks (steel fix)	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4 S1239HAT4 S1016HT4 S1016HT4 S1016HT44	plain colour head plain colour head plain colour head	1	per 50 per 250 per 50 per 1000
	12 x 50 Polycarb Screws Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek (crest fixing to steel) 10x16 Hex Head SD (valley fixing to steel)	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4 S1239HAT4 S1016HT4 S1016HT4	plain colour head plain colour head plain		per 50 per 250 per 50 per 1000 per 1000 per 1000 per 1000 per 1000
	12 x 50 Polycarb Screws Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek (crest fixing to steel) 10x16 Hex Head SD (valley fixing to steel) 10x16 Wafer Teks (steel fix) M6 x 50 Hex Head SDS	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4 S1239HAT4 S1016HT4 S1016HT4 S1016WT4 S0650HZIP4	plain colour head plain colour head plain colour head		per 50 per 250 per 50 per 1000
	12 x 50 Polycarb Screws Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek (crest fixing to steel) 10x16 Hex Head SD (valley fixing to steel) 10x16 Wafer Teks (steel fix) M6 x 50 Hex Head SDS (crest fixing to timber & steel) M6 x 65 Hex Head SDS	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4 S1239HAT4 S1016HT4 S1016HT4 S1016HT44 S1016WT4 S0650HZIP4 S0650HZIP4 S0665HZIP4	plain colour head plain colour head plain colour head plain colour head		per 50 per 250 per 50 per 1000
	12 x 50 Polycarb Screws Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek (crest fixing to steel) 10x16 Hex Head SD (valley fixing to steel) 10x16 Wafer Teks (steel fix) M6 x 50 Hex Head SDS (crest fixing to timber & steel) M6 x 65 Hex Head SDS (crest fixing to timber & steel)	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4 S1239HAT4 S1016HT4 S1016HT4 S1016WT4 S0650HZIP4 S0655HZIP4 S0665HZIP4 S0665HZIP4	plain colour head plain colour head plain colour head plain colour head		per 50 per 250 per 50 per 1000
_A	Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek (crest fixing to steel) 10x16 Hex Head SD (valley fixing to steel) 10x16 Wafer Teks (steel fix) M6 x 50 Hex Head SDS (crest fixing to timber & steel) M6 x 65 Hex Head SDS (crest fixing to timber & steel) Roof Zip Class 5	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4 S1239HAT4 S1016HT4 S1016HT4 S1016WT4 S0650HZIP4 S0665HZIP4 S0665HZIP4 S0665HZIP4 S0665HZIP5	plain colour head plain colour head plain colour head plain colour head colour head colour head		per 50 per 250 per 50 per 1000 (only)
	12 x 50 Polycarb Screws Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek (crest fixing to steel) 10x16 Hex Head SD (valley fixing to steel) 10x16 Wafer Teks (steel fix) M6 x 50 Hex Head SDS (crest fixing to timber & steel) M6 x 65 Hex Head SDS (crest fixing to timber & steel)	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4 S1239HAT4 S1016HT4 S1016HT4 S1016WT4 S0650HZIP4 S0665HZIP4 S0665HZIP4 S0665HZIP4 S0665HZIP5	plain colour head plain colour head plain colour head plain colour head colour head colour head		per 50 per 250 per 50 per 1000 (only)
	Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek (crest fixing to steel) 10x16 Hex Head SD (valley fixing to steel) 10x16 Wafer Teks (steel fix) M6 x 50 Hex Head SDS (crest fixing to timber & steel) M6 x 65 Hex Head SDS (crest fixing to timber & steel) Roof Zip Class 5 Also Available in packs of 100.	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4 S1239HAT4 S1016HT4 S1016HT4 S1016HT4 S0650HZIP4 S0650HZIP4 S0655HZIP4 S0655HZIP4 S0655HZIP4 S0650HZIP5 Please contact you	plain colour head plain colour head plain colour head plain colour head colour head colour head r account man		per 50 per 250 per 50 per 1000 (only)
Roof Zip Screws	Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek (crest fixing to steel) 10x16 Hex Head SD (valley fixing to steel) 10x16 Wafer Teks (steel fix) M6 x 50 Hex Head SDS (crest fixing to timber & steel) M6 x 65 Hex Head SDS (crest fixing to timber & steel) Roof Zip Class 5 Also Available in packs of 100.	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4 S1239HAT4 S1016HT4 S1016HT4 S1016WT4 S0650HZIP4 S0650HZIP4 S0665HZIP4 S0665HZIP5 Please contact you CEFS per standard AS15	plain colour head plain colour head plain colour head plain colour head colour head r account man 918mm 630.3 – 1999		per 50 per 250 per 50 per 1000 per 100
Roof Zip Screws	Anti Noise Stop Tape 12x50 Hex Head type 17 (crest fixing to timber) 5.5x39 Hex Auto Tek (crest fixing to steel) 10x16 Hex Head SD (valley fixing to steel) 10x16 Wafer Teks (steel fix) M6 x 50 Hex Head SDS (crest fixing to timber & steel) M6 x 65 Hex Head SDS (crest fixing to timber & steel) Roof Zip Class 5 Also Available in packs of 100.	TSPC1SHOTPK TSPC1SHOTT TSPCANT25200 S1250H174 S1250H174 S1239HAT4 S1239HAT4 S1016HT4 S1016HT4 S1016HT4 S0650HZIP4 S0650HZIP4 S0655HZIP4 S0655HZIP4 S0655HZIP4 S0650HZIP5 Please contact you	plain colour head plain colour head plain colour head plain colour head colour head colour head r account man		per 50 per 250 per 50 per 1000

20



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

oduct Roofing/Cladding/Accessories	Details	Code	Finish	BMT	Unit
shings	Stramit® Roll Top Ridge	RTR42ZA60	6m ZA		each
	RTRV (Suit 25° pitch)	RTR42ZA	CTL ZA		lin metre
	mm (our 20 prony	RTR42GA	CTL GA		lin metre
140mm		RTR42X	CTL COL		lin metre
		RTR42T	MATT		lin metre
		RTR42ZM8	ZM8		lin metre
		*RTRRF42X	CTL COL		lin metre
		*RTRRF42ZA	CTL ZA		lin metre
		*Maximum leng		for rever	
	Pall Tan Pidgo Coft (0 55hmt	/ C200			
	Roll Top Ridge Soft (0.55bmt (restricted colour range)	*RTR55X	CTL COL		lin metre
	(resultied tollul fallye)	RTRR55X	CTL COL		lin metre
	(Pollformed) available av 1/22		UIL UUL		IIII IIIEUE
= 10mm	(Rollformed) available ex Kno	IXIICIU UIIIY			
	Valley VR				
210mm	(Rollformed) available	VDID 4074	CTI 74		lin motro
	ex Knoxfield only	VRIB40ZA VRIB40X	CTL ZA CTL COL		lin metre lin metre
10 >		VRIB40T	CTL MATT	hinan in n	lin metre
100	Vallay Plain (folded)	Maximum length		miys is 8	
190	Valley Plain (folded)	VPF55GA	CTL GA		lin metre
		VPF55ZA	CTL ZA		lin metre
		VPF55X	CTL MATT		lin metre
		VPF55T	CTL 7M0		lin metre
**************************************		VPF55ZM8	CTL ZM8		lin metre
\/_\/*	Barge CBV	BFC22055GA	CTL GA		lin metre
10mm * 50mm	30 02 1	BFC22055ZA	CTL ZA		lin metre
150mm		BFC22055X	CTL COL		lin metre
			J.L 00L		
100mm	Under Flashing CUV	UFC26055GA	CTL GA		lin metre
ilean //		UFC26055ZA	CTL ZA		lin metre
100000		UFC26055X	CTL COL		lin metre
	Barge Roll Vic BRV	BR150GA24	2.4m GA		each
150	2 go 11011 110 D111	BR150ZA24	2.4m ZA		each
		BR150GA18	1.8m GA		each
		BR150ZA18	1.8m ZA		each
		BR150X24	2.4m COL		each
1		BR150X18	1.8m COL		each
GE .					
65	Soaker Flashing 150	SF15055GA24	GA		each
150/200		SF15050ZA24	ZA		each
	Soaker Flashing 200	SF20055GA24	GA		each
1	•	SF20050ZA24	ZA		each
18					
De State	Vee Ridge	VEERZA	CTL ZA	0.55	lin metre
		VEERX	CTL ZA	0.55	lin metre
f Batten 40					
40 6/	Roof Batten 6.0m	RBV40TC6000	TRUECORE®	0.48	each
40	Roof Batten 7.5m	RBV40TC7500	TRUECORE®	0.48	each
15					
	40mm Batten Zip	S1240HMTZIP			per 1000
_1	40111111 Dallett Zip	O I L TOI III I LII			po



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700

FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

CURVED ROOFING • TANK IRON • ACCESSORIES Product Curved Roofing/Tank Iron/Accessories Details Code **Finish BMT** Unit Stramit® Curving Quality Mild Steel G300 CD*/CQ60ZA ZΑ 0.60 per m² CD/CQ60X---COL 0.60 per m² CD/CQ60GA GA 0.60 ner m² Material Costs Only, reverse roll available. Additional cutting charges will apply. (Available in selected colours. Refer page 14) Add curving cost to material cost for total price When end lapping occurs, please liaise with your Stramit® office for additional details * Prefix CD Corry-decking, Flat sheet only. Costs Sheet lengths up to 3.5m CURV40035 per curve (up to 90° curve) Sheet lengths 3.5m to 7m CURV43570 per curve Sheet lengths 7m to 10m CURV47010 per curve Sheet lengths 10m to 13m CURV41013 per curve Docking of curved sheet (less than 2.5 metres only) CUTBACKLTH per cut Lengths over 13m are subject to special pricing. Special freight prices apply to lengths over 7 metres Double curves are priced at sheet length x 2 curves

Bullnosing & Curving

Please note: the minimum radius we can roll for any curve is 300mm.

Please supply template & all information wherever possible.

For all bullnose curved sheets less than 400mm radius, a straight section (A) of 110mm is required, and will be charged in the price of the sheet. If all or part of this dimension is not required on the finished sheet, then the sheet will be cut back and a docking fee (CUTBACKLTH) will apply

Templates

Templates may be an existing corrugated sheet, timber hockey sticks, timber rafters or drawn or cut onto MDF or plywood sheets, cement sheet, flat metal strip, corflute sheet or thick cardboard.


All templates must be a minimum of 900mm long in order to get the correct shape.

For bullnose templates, the customer must show the actual curved section/length and at least 300-400mm of straight roof section to ascertain the correct roof fall. All templates must show the customer's name, contact number, number of sheets required and finished colour or ZINCALUME® steel or galvanised finish.


Unacceptable Templates

Copper pipes, hip hockey sticks, loose pieces of paper, badly distorted old sheets or old sheets painted with lead based paint.

If a customer cannot provide a template, the following information and measurements for the various curved shapes can be provided.

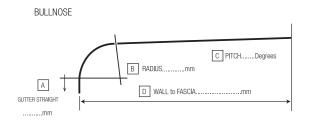

Bui	inosing	
Α	Straight section into gutter	mm
В	Radius of curve	mm
C	Angle of roof pitch	degrees
	Wall to fascia	
Nun	nber of sheets required	
Dire	ection of laying (left to right/right to left)	
Colo	our	
0th	er information (eg. docking, endlapping)	

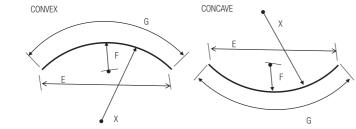

Concave & Convex Curves

For convex or concave orders without templates, please supply measurements for one of the four choices below:


- A Actual sheet length required (G) and the radius of curve (X)
- **B** Actual sheet length required (G) and height or drop in centre of sheet (F)
- Horizontal width across from tip to tip (E) and the radius of curve (X)
- D Horizontal width across from tip to tip (E) and height or drop in centre of sheet (F)




PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

CURVED ROOFING • TANK IRON • ACCESSORIES

Common Curves

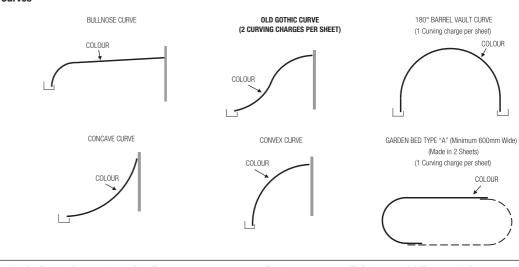



Product Curved Roofing/Tank Iron/Accessories	Details	Code	Finish BM1	Unit	
Flashings	Steel Curved Pittsburg	Flashings			
	Barge Left Hand	CAMETCBL	ZA/GA/Colour	lin metre	
	Right Han	d CAMETCBR	ZA/GA/Colour	lin metre	
3	nt Hand				
140	140				

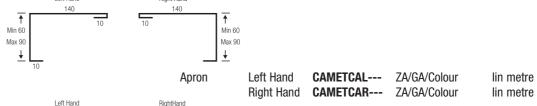

	Left Hand	RightHand	
↑ Min 60			↑ Min 60
Max 90			Max 90
↓ [140	140	↓
	1	0 10	

7 day lead time

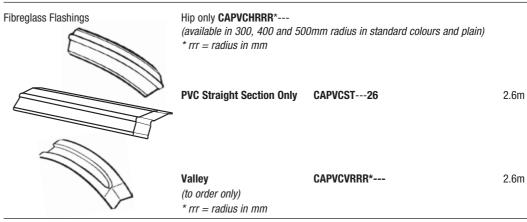



CT61060GA 8 corrugations, 610 cover 0.60 per m² CT61060A0GA 0.60 per m² (rolled edge down with AQUAPLATE® steel under)

Cut to length CTL ex Knoxfield normal lead time - manufactured Tuesdays only. All orders must come with drawings showing colour and leg positions



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

ROOFING • CLADDING • ACCESSORIES Product Roofing/Cladding/Accessories Details Code **Finish BMT** Unit Stramit Monoclad® Hi-Tensile G550 MC42ZA ZΑ 0.42 per m² MC48ZA ZA 0.48 per m² **MC42T---MATT 0.42 per m² **MC48T MATT 0.48 per m² MC42X---COL 0.42 per m² MC48X---COL 0.48 per m² **MC42U---Ultra 0.42 per m² **MC48U---Ultra 0.48 **MC42ZM8---ZM8 0.42 **MC48ZM8---ZM8 0.48 ner m² **MC42U---Ultra 0.42 per m² **MC48U---Ultra 0.48 MC42RRX---Rev Roll 0.42 MC48RRX---Rev Roll 0.48 per m² MC42GA GA Z450 0.42 per m² To convert to linear metres multiply by 0.762 **Stramit Monoclad® also available in the BlueScope Steel Premium Products range of colours for severe environments, refer page 30 Wall Cladding Hi-Tensile G550 MC35ZA ZA 0.35 per m² MC35X---COL 0.35 per m² MC35RRX---Rev Roll 0.35 per m² Acoustic Perf. MC42IOWHP11 COL 0.42 per m² Project based material, min order 1 tonne. Allow extra lead time. Translucent Roof Sheeting TSFGMC18---1800gsm (6oz)lin metre Suit Stramit Monoclad® sheeting CLR, OPA, HGN TSFGMC24---2400gsm (8oz)lin metre Lengths over 11.6m incur extra delivery charges, direct delivery charges may apply. TSPCMC---LL Polycarbonate (0.80mm)lin metre (not CTL) TSPCGR---LL Greca 760mm lin metre (not CTL) TSPC1SH0TPK per 50 Polycarb Screws 12x50 TSPC1SH0TT per 250 Fibreglass Screws 14x65 TSFG1465WW32 per 500 CLR, GRY, OPL, LBZ and DKT Available in standard lengths only: 1.8, 2.1, 2.4, 2.7m, 3.0m, 3.6m, 4.2m, 4.8m, 5.4m, 6.0m Filler Strip (under eave) **MCEFSBTM** 760mm bottom Accessories each Filler Strip (under ridge) **MCEFSTOP** 950mm top each Fire retardant filler strips as per standard AS1530.3 - 1999 MCEFSFRBTM 760mm bottom each **MCEFSFRTOP** 950mm top each TSFGMCRPM14H suit fibreglass Reinforcing Plate & Seal per 100 Weatherlok Neo Washer TSFGWW32H suit fibreglass per 100 MCSETD Stop Ending Tool each MCMONOLAP76 MC MonoLap 73mm 7.62m Roll MC Monolap Expansion Washer MCMONOLAPEWZA each 12x68 Hex Tek Cls4 COL **\$1268HTMC***4** Pack - only suitable for MC Monolap above (40 screws per roll - incl plate & washer) 12x68 Hex Tek Mcap S1268HTMC4 Box MC MonoLap Stop End Tool MCMONOLAPSETD each Monolap Accessories Ex Brisbane



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

duct Roofing/Cladding/Accessories	Details	Code	Finish	Unit
eners	12x65 Hex Head type 17	S1265H174	Plain	per 1000
Thir summin	(for crest fixing to timber)	S1265H174	Colour head	per 1000
	5.5 x 50 Hex Auto Tek	S1250HAT4	Plain	per 1000
	(for crest fixing to steel)	S1250HAT4	Colour head	per 1000
	10x16 Hex Head SD	S1016HT4	Plain	per 1000
Щ	(for valley fixing to steel)	S1016HT4	Colour head	per 1000
	10x16 Wafer Teks (fix to steel)	S1016WT4		per 1000
Zip Screws	M6 x 50 Hex Head SDS	S0650HZIP4	Plain	per 1000
	(crest fixing to timber & steel)	S0650HZIP4	Colour head	per 1000
	M6 x 65 Hex Head SDS	S0665HZIP4	Plain	per 1000
•	(crest fixing to timber & steel)	S0665HZIP4	Colour head	per 1000
	Also availale in packs of 100 -	Please contact your	account manager f	or prices.
ngs		Maximum length	for folded flashings	is 8 metres
170	Ridge MCR	RFMC55GA	CTL GA	lin metre
170		RFMC55ZA	CTL ZA	lin metre
30		RFMC55X	CTL COL	lin metre
145 30	Barge MCBV	BFMC24055GA	CTL GA	lin metre
55		BFMC24055ZA	CTL ZA	lin metre
10		BFMC24055X	CTL COL	lin metre
ا	Under Flashing MCU	UFMC55GA	CTL GA	lin metre
65		UFMC55ZA	CTL ZA	lin metre
145			CTL COL	lin metre
145 30		UFMC55X	OIL OOL	III IIIou o
145 30	Valley Plain (folded)		CTL GA	
10	Valley Plain (folded)	UFMC55X VPF55GA VPF55ZA		lin metre lin metre
	Valley Plain (folded)	VPF55GA	CTL GA	lin metre
10	Valley Plain (folded)	VPF55GA VPF55ZA	CTL GA CTL ZA	lin metre lin metre
10	Valley Plain (folded)	VPF55GA VPF55ZA VPF55X	CTL GA CTL ZA CTL COL	lin metre lin metre lin metre
10	Rollformed (available ex Knoxfie	VPF55GA VPF55ZA VPF55X VPF55T VPF55ZM8	CTL GA CTL ZA CTL COL CTL MATT	lin metre lin metre lin metre lin metre
10		VPF55GA VPF55ZA VPF55X VPF55T VPF55ZM8 eld only)	CTL GA CTL ZA CTL COL CTL MATT CTL ZM8	lin metre lin metre lin metre lin metre lin metre
10	Rollformed (available ex Knoxfie	VPF55GA VPF55ZA VPF55X VPF55T VPF55ZM8	CTL GA CTL ZA CTL COL CTL MATT CTL ZM8	lin metre lin metre lin metre lin metre
10	Rollformed (available ex Knoxfie	VPF55GA VPF55ZA VPF55X VPF55T VPF55ZM8 eld only) VRIB40ZA	CTL GA CTL ZA CTL COL CTL MATT CTL ZM8	lin metre lin metre lin metre lin metre lin metre



METROPOLITAN & SOUTHERN VICTORIA TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

roduct Roofing/Cladding/Accessories	Details	Code	Finish	BMT	Unit
Jaugt nooning/Gladding/Accessories	Details	Coue	FIIIISII	DIVII	Ollit
ramit Longspan®	Hi-Tensile G550	LS42ZA	ZA	0.42	per m²
7mm		LS48ZA **LS42T	ZA MATT	0.48 0.42	per m ² per m ²
		**LS48T	MATT	0.48	per m ²
		LS42X LS48X	COL COL	0.42 0.48	per m ² per m ²
→ 700mm (±4mm) Cover		**LS42U	Ultra	0.42	per m²
		**LS48U	Ultra	0.48	per m²
		**LS42ZM8 **LS48ZM8	ZM8 ZM8	0.42 0.48	per m ² per m ²
		**LS42U	Ultra	0.42	per m ²
		**LS48U	Ultra	0.48	per m ²
		LS42GA	GA Z450	0.42	per m²
	Acoustic Perforated	LS42I0WHP11	COL	0.42	per m²
	Gutter Board 6.1m L 550mm W	LSGB55ZA6100	ZA ZA	0.42	each
	Gutter Board 6.1m L 750mm W	LSGB75ZA6100	ZA	0.42	each
ramit Longspan® also available in	n the BlueScope Steel Premium Pro	oducts range of cold	ours for severe	environn	nents, refer page 30
eglass Roof Sheeting	Suit Stramit	TSFGLS24	2400gsm (80	z)lin metr	е
	Longspan® sheeting CLR, OPA, HGN				
	ong orry non				
ngths over 11.6m incur extra deliver	ry charges, direct delivery charges	may apply.			
steners	12x65 Hex Head type 17	S1265H174	Plain		per 1000
	(for crest fixing to timber)	S1265H174	Colour		per 1000
4	5.5 x 50 Hex Auto Tek	S1250HAT4	Plain		per 1000
	(for crest fixing to steel)	S1250HAT4	Colour		per 1000
-0	10x16 Hex Head SD	S1016HT4	Plain		ner 1000
	(for valley fixing to steel)	S1016HT4 S1016HT4	Colour		per 1000 per 1000
<u> </u>	,		-		
	10x16 WaferTeks (fix to steel)	S1016WT4			per 1000
.	Also available in packs of 100 -	Please contact your	r account mana	ager for p	rices.
essories	Filler Strip (under eave)	LSEFSBTM	900mm botto	m	each
	Filler Strip (under ridge) - Also available in fire retardant	LSEFSTOP material as per si	900mm top	30.3 – 19	each 1999
	avanasio in ino rotardant	LSEFSFRBTM	900mm botto		each
	Deinfermine Diete 0 Oceal	LSEFSFRTOP	900mm top		each
	Reinforcing Plate & Seal	TSFGMCRPM14H	suit fibreglass	8	per 100
	Weatherlok Neo Washer	TSFGWW32H	suit fibreglass	3	per 100
ashings 170	Didgo MCD	Maximum length for		ngs is 8 r	
	Ridge MCR	RFMC55GA RFMC55ZA	GA ZA		lin metre lin metre
30		RFMC55X	COL		lin metre
145	Parao MCDV	DEMOGRACE CA	CA		lin motro
55	Barge MCBV	BFMC24055GA BFMC24055ZA	GA ZA		lin metre lin metre
10		BFMC24055X	COL		lin metre
	Under Flaching MCU	HEMCEECA	GA		lin matra
65	Under Flashing MCU	UFMC55GA UFMC55ZA	GA ZA		lin metre lin metre
145 30		UFMC55X	COL		lin metre
10	Valley Plain (folded)	VPF55GA	GA		lin metre
< /	valicy main (lulucu)	VPF55ZA	ZA		lin metre
190		VPF55X	COL		lin metre
		VPF55T	MATT		lin metre
	Rollformed (available ex Knoxfiel	VPF55ZM8 d only)	ZM8		lin metre
= 10mm	Valley VR	,			
		VRIB40ZA VRIB40X	ZA COL		lin metre lin metre
210mm		VRIB40X VRIB40T	MATT		lin metre
	9.5m maximum length	-			
ox Gutter Brackets 🗔 📋	250mm - 400mm (size 1)	BGBA1EAZA	24 per box		each
ox Gutter Brackets djustable)	250mm - 400mm (size 1) 400mm - 650mm (size 2) 650mm - 1000mm (size 3)	BGBA1EAZA BGBA2EAZA BGBA3EAZA	24 per box 24 per box 18 per box		each each each

26



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

			CESSO		
roduct Roofing/Cladding/Accessories	Details	Code	Finish	BMT	Unit
tramit Speed Deck Ultra®	Hi-Tensile G550	UD42ZA	ZA	0.42	per m²
		UD48ZA	ZA	0.48	per m ²
Overlap Rib Central Ribs Und	erlap Rib	**UD42T	MATT	0.42	per m²
		**UD48T	MATT	0.48	per m ²
+ #////////////////////////////////////		UD42X	COL	0.42	per m ²
3mm / / / / / / / / / / / / / / / / / /	77.7	UD48X	COL	0.48	per m ²
Overlap Pan Central Pan Underla	ap Pan	UD42GA	GA	0.42	per m²
700mm (4mm) Cover	→	**UD42ZM8	ZM8	0.42	per m²
,		**UD48ZM8	ZM8	0.48	per m ²
		**UD42U	Ultra	0.42	per m²
		**UD48U	Ultra	0.48	per m²
Stramit Speed Deck Ultra® also ava	nilable in the BlueScope Steel Pre	mium Products rang	ge of colours	for severe	environments, refer page 30
reglass Roof Sheeting	Suit Stramit	TSFGUD24	2400gsm		lin metre
	Speed Deck Ultra® decking				
\wedge \wedge \wedge	CLR, OPA				
~/\\\	A/A				
	Lengths over 11.6m incu	ur extra delivery cha	arges, direct d	delivery ch	arges may apply.
700mm Cover			3	y	2 7 7 7 7
ng Clips	Fixing Clips no fasteners	UDFC	GA		each
. /	(40 per box)				
100	Farlap Lapping Accessory	UDFARLAP			each
6	Farlap Lapping Accessory Roll	UDFARLAP70			7m roll
	Farlap TurnUp/TurnDown Tool	UDFARLAPSETD			each
	Roof Razer Insulation Spacer				
	85 mm	RRZISGA	GA		box 6
	115 mm	RRZIS115GA	GA		box 6
THE STATE OF THE S	To calculate clip requirements of	divide sheet length L	by purlin spac	cing, round	d up if required
4	and add 1 for the end clip. Then	n multiply by the nu	mber of snee	ts. Clip co	vers full /UUmm of sneet widti
eners	40m Batten Zip	S1240HMTZIP			1000
	40.00 !! !! !	040001171111			1000
	12x30 Hex Head	S1230HTNN			1000
	Self Drilling/Tapping (for fixing a Also available in packs of 100 -	10 METAI) - nlease contact vou	r acccount m	anager fo	r nrices
			i account in	anager 10	
essories	Filler Strip 700 (Bottom)	UDEFSBTM			each
	Filler Strip 700 (Top)	UDEFSTOP		F00.0 4	each
	Also available in fire retardan		tandard AS1	530.3 – 1	
		UDEFSFRBTM UDEFSFRTOP			each
	Stop Ending tool	UDSETD			each each
	(Turn up/turn down) Double end				σαυιι
	יים מיים מיים מיים מיים מיים מיים מיים				
shings	District ODDV	Maximum length f		hings is 8	
160	Ridge SDRV	RFSD40055GA	GA		lin metre
		RFSD40055ZA	ZA		lin metre
40		RFSD40055X	COL		lin metre
100	Barge SDBV	BFSD55GA	GA		lin metre
180 40	Daily0 ODDV	BFSD55ZA	ZA		lin metre
70		BFSD55X	COL		lin metre
l					
10	Under Flashing SDU	UFSD55GA	GA		lin metre
	-	UFSD55ZA	ZA		lin metre
80		UFSD55X	COL		lin metre
180 40					
	Valley Plain (folded)	VPF55GA	GA		lin metre
10		VPF55ZA	ZA		lin metre
< /a>		VPF55X	COL		lin metre
190		VPF55T	MATT		lin metre
190	Dallfarmand (constitute)	VPF55ZM8	ZM8		lin metre
	Rollformed (available ex Knoxfie	eia only)			
·	Valloy VD				
= 10mm	Valley VR	VDID/107A	71		lin motro
	Valley VR	VRIB40ZA	ZA		lin metre
210mm	9.5m maximum length	VRIB40ZA VRIB40X VRIB40T	ZA COL MATT		lin metre lin metre lin metre



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700

FAX (02) 6092 3766

BENDIGO FAX (03) 5447 9677

TEL (03) 5448 6400



COLORBOND® steel is more than a world-class building product. It's an iconic brand that's helped the people of our building industry shape the very landscape in which we live.

MADE FOR AUSTRALIAN CONDITIONS

Australia is battered by our relentless climate every day. Today's COLORBOND® steel is the result of over 5 decades of research. development and innovation, based on over 50 years of data from thousands of steel samples.

TRIED AND TESTED FOR THE AUSTRALIAN ENVIRONMENT

For roofing and walling close to water, COLORBOND® Ultra steel has been designed to provide enhanced corrosion protection, while the iconic COLORBOND® steel range of 22 colours is ideal for most building designs in most locations. Regardless of where you build, there's likely to be a COLORBOND® steel solution for you.

COOLER IN THE SUMMER HEAT

COLORBOND® steel colours incorporate Thermatech® solar reflectance technology¹, which can mean reduced reliance on airconditioning and less heat stress on a roof. For commercial roofing applications, COLORBOND® Coolmax® steel provides BlueScope's highest solar reflectance product, which may help to reduce roofing temperatures and keep buildings cooler2.

FIVE LAYERS OF PROTECTION

Manufactured in Australia to relevant Australian Standards (AS 1397-2011 and AS/NZS 2728:2013) and tested in some of the harshest Australian conditions, COLORBOND® steel is far more than just 'paint on steel'.

- 1. The steel base meets relevant Australian Standards, ensuring strict adherence to the required grade and strength.
- 2. The base is then coated in BlueScope's industry leading metallic coating incorporating Activate® technology4, to provide enhanced corrosion resistance.
- 3. A thin pre-treatment layer is applied to optimise the adhesion of further coatings.
- 4. A corrosion inhibitive primer is baked onto the surface.
- 5. A topcoat of specially developed, exterior grade paint is baked on to provide resistance to chipping, flaking and blistering and to ensure the finish retains its look for longer.



PEACE OF MIND FOR YOU AND YOUR CUSTOMERS

COLORBOND® steel for roofing is warranted for corrosion to perforation for up to 36 years, as well as paint flake and peel for up to 20 years³. Detailed information can be accessed at bluescopesteel.com.au/warranties.

NATIONWIDE SUPPORT

BlueScope's nationwide network of sales and technical support helps provide advice and information for customers, architects, designers, engineers, builders, trades and homeowners who use COLORBOND® steel.

- 1. Thermatech® technology is not available in Night Sky®, or non-standard colours, and is not available in COLORBOND® Stainless steel, COLORBOND® Metallic steel, or COLORBOND® Coolmax® steel. Results will depend on roof colour, level and location of insulation, type and location of building shape and function.
- 2. Compared to conventional roofing materials of lower solar reflectance index (SRI), such as ZINCALUME® steel and all other roofing materials in the COLORBOND® steel range. Any savings and or the extent to which a building is cooler may vary and depend upon the particular circumstances of your building, including building location, level of insulation, location of air-conditioning when installed, building shape, building function and environmental factors. For further information refer to Stockland case study http://steel.com.au/colorbond-
- 3. Warranties are subject to exclusions, application and eligibility criteria. For full terms and conditions and to determine the eligibility of your product for the warranty visit bluescopesteel.com.au/warranties or contact BlueScope on 1800 064 384.
- 4. Aluminium/zinc/magnesium alloy-coated steel substrate incorporating Activate® technology is not available for COLORBOND® Stainless steel, and COLORBOND® steel products with a galvanised steel substrate.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)


PREMIUM PRODUCTS • ROOFING • CLADDING • ACCESSORIES

Product	Details	BMT	Finish	Code	Unit
Roofing/Cladding/Accessories		mm			

Most Premium Products manufactured at Knoxfield only, allow extra 2 days lead time for country areas, more for interstate - ask for details. Available in the Blue Scope Steel Premium range of colours for severe evironments refer page 30.

Reverse roll roofing/cladding available on request. Additional charges will apply. See standard product pages for other accessories, flashing profiles, fibreglass.

Stramit® Corrugated




0.42	Ultra	C42U	per m²
0.42	Matt	C42T	per m²
0.48	Ultra	C48U	per m²
0.48	Matt	C48T	per m²
0.48	Metallic*	C48M	per m²
0.48	Coolmax®	C48KWHN	per m²

*Metallic available on project basis only. Minimum order 2 tonnes.

To convert to linear metres multiply by 0.762

Stramit Monoclad®




0.42	Ultra	MC42U	per m²
0.42	Matt	MC42T	per m²
0.48	Ultra	MC48U	per m²
0.48	Matt	MC48T	per m²
0.48	Metallic*	MC48M	per m²
0.48	Coolmax®	MC48KWHN	per m ²

*Metallic available on project basis only. Minimum order 2 tonnes.

To convert to linear metres multiply by 0.762

Stramit Longspan®



0.42	Ultra	LS42U	per m²
0.42	Matt	LS42T	per m²
0.48	Ultra	LS48U	per m²
0.48	Matt	LS48T	per m²
0.48	Metallic*	LS48M	per m²
0.48	Coolmax®	LS48KWHN	per m²


*Metallic available on project basis only. Minimum order 2 tonnes.

To convert to linear metres multiply by 0.700

Screws to suit above

A range of Class 5 screws available to suit above premium range. Please contact customer service for details.

Stramit Speed Deck Ultra®



0.42	Ultra	UD42U	per m
0.42	Matt	UD42T	per m
0.48	Ultra	UD48U	per m
0.48	Matt	UD48T	per m
0.48	Metallic	UD48M	per m
0.48	Coolmax®	UD48KWHN	per m
0.48 0.48 0.48	Ultra Matt Metallic	UD48U UD48T UD48M	per m per m per m

To convert to linear metres multiply by 0.700



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700

MK48M---

FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

PREMIUM PRODUCTS • ROOFING • CLADDING • ACCESSORIES

Details BMT Finish Code Unit Product Roofing/Cladding/Accessories mm

Stramit Mini Corry®

manufactured in NSW – allow extra lead time, minimum length 0.3m.



Metallic

ner m²

per m²

To convert to linear metres multiply by 0.825

Stramit Minirib® (Rectangular profile)

manufactured in NSW – allow extra lead time, minimum length 1.2m.



MR42U---

To convert to linear metres multiply by 0.900

Stramit Monopanel®



Hi-Tensile G550

0.48

Metallic

MP48M---

per m²

Project Base Material, Min Order 1.2 Tonne (220m2), Allow Extra Lead Time.

Recommended maximum length 6.0m, beyond 6.0m at customer responsibility as handling damage is likely. Minimum length 500mm.

Condeck Packers are required for lengths over 6.000m at additional cost.

PREMIUM PRODUCTS • ROOFING • CLADDING

Product Roofing/Cladding/Accessories	Details	Cover Width mm	Ordering Code	Finish	ВМТ	Unit mm
Stramit Sharpline® Direct Fix	25mm Rib (short)	290	SLS290D55T***	Matt	0.55	per m ²
-		290	SLS290D55U***	Ultra	0.55	per m ²
		490	SLS490D55T***	Matt	0.55	per m ²
		490	SLS490D55U***	Ultra	0.55	per m²
	38mm Rib (tall)	265	SLT265D55T***	Matt	0.55	per m²
		265	SLT265D55U***	Ultra	0.55	per m ²
		465	SLT465D55T***	Matt	0.55	per m ²
		465	SLT465D55U***	Ultra	0.55	per m²
Stramit Sharpline® Clip Fix	25mm Rib (short)	320	SLS320C55T***	Matt	0.55	per m²
		320	SLS320C55U***	Ultra	0.55	per m ²
		520	SLS520C55T***	Matt	0.55	per m ²
		520	SLS520C55U***	Ultra	0.55	per m²
	38mm Rib (tall)	285	SLT285C55T***	Matt	0.55	per m²
		285	SLT285C55U***	Ultra	0.55	per m ²
·		465	SLT465C55T***	Matt	0.55	per m ²
		465	SLT465C55U***	Ultra	0.55	per m ²

	PREMIUM COLOUR RANGE											
COLORBOND® ULTRA STEEL		COLOR	BOND® METALLIC STEEL	COLORE	BOND® COOLMAX® STEEL	COL	ORBOND® STEEL MATT					
DUN	DUNE®	ARI	ARIES®	WHN	WHITEHAVEN®	BAS	BASALT® MATT					
MON	MONUMENT®	AST	ASTRO®			MON	MONUMENT® MATT					
SUR	SURFMIST®	CEL	CELESTIAN®			SUR	SURFMIST® MATT					
WLB	WALLABY®	COS	COSMIC®									
WSP	WINDSPRAY®	GLT	GALACTIC®									
WDG	WOODLAND GREY®	RHE	RHEA®									

30



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

MAGNAFLOW® • ROOFING • CLADDING • RAINWATER

PRODUCT – Roofing/Cladding/Rainwater	BMT (mm)
Stramit® Corrugated	0.42 / 0.48
Stramit Monoclad®	0.42 / 0.48
Stramit Longspan®	0.42 / 0.48
Stramit Speed Deck Ultra®	0.42 / 0.48
Stramit® Roll Top Ridge	0.42 / 0.55
Stramit® Valley Folded	0.55
Stramit® Flashings & Others	0.55
Stramit® Downpipes 95 x 45	0.55
Stramit® Downpipes 100 x 50	0.55
Stramit® Downpipes 100 x 75	0.55
Stramit® Downpipes 100 x 100	0.55

Please refer to Sales office for lead times and availability.

MagnaFlow® sheeting is a highly durable prepainted sheet steel system suitable for use in corrosive environments for roofing, walling and rainwater products. The protective metallic coating on the base steel is a new technology in accordance with AS1397 -2011. This coating provides the added durability of the MagnaFlow® product.

Please enquire at your local Stramit office to confirm colour availability.

SUBSTRATE

The coating on the steel substrate complies with the coating classes as specified in AS 1397 - 2011: Continuous Hot Dipped Metallic Coated Steel Sheet and Strip – Coatings of Zinc, and Zinc Alloyed with Aluminium and Magnesium. The MagnaFlow® coating comprises zinc, aluminium and magnesium and delivers more durable site performance than standard zinc or Zinc/aluminium systems. Minimum coating mass is 240gsm.

RECOMMENDED END USES

MagnaFlow® paint systems have a very good colour and gloss retention and are suitable for roofing, cladding and rainwater goods. It is ideal for animal shelters, flashings, interior uses, and exterior environments where corrosion levels are moderate. It is also suitable for fencing applications.


MAGNAFLOW® WARRANTIES

A range or warranties are available to support MagnaFlow® products for various exposure conditions. Please contact your local Stramit office for details.

THE MAGIC OF MAGNESIUM

All steel roofs are susceptible to the elements along cut edges however the addition of magnesium to the standard zinc/aluminium alloy in MagnaFlow® products provides superior corrosion resistance in this area. As time goes on it allows the protective metal coating to microscopically flow over the cut edge. At this point a sacrificial anticorrosive reaction takes place and a robust seal is created.

Anticorrosive reaction of MagnaFlow® products

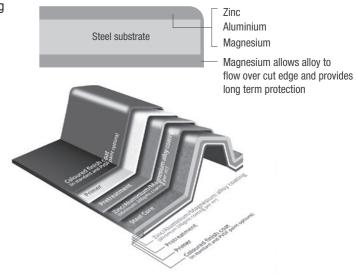

PRODUCT AVAILABILITY - MAGNAFLOW COLOURS												
Product	ВМТ		Magnaflow Colours ZM8***									
	(mm)	AGY	BCH	MLH	OWH	SLG	GUL	SCM	CFG	HRD	MGN	MBL
Doofing	0.42	Y	P0A	Y	Υ	Υ	CHECK	POA	POA	P0A	P0A	POA
Roofing	0.48	POA	P0A	Υ	Υ	Υ	P0A	P0A	P0A	POA	P0A	POA
Fascia	0.42	Y	Υ	P0A	Υ	Υ	POA	Y	POA	POA	P0A	POA
QLD Quad / 150 Half Rnd	0.42	Υ	Υ	P0A	Υ	Y	P0A	P0A	P0A	POA	P0A	POA
M Gutter	0.42	Y	Y	P0A	Y	Y	P0A	Y	POA	POA	P0A	POA
Quad 175	0.55	POA	POA	P0A	P0A	POA	P0A	P0A	POA	POA	P0A	POA
Flashings	0.55	Y	Y	Υ	Υ	Υ	P0A	P0A	P0A	P0A	P0A	P0A

MAGNAFLOW COLOUR NAMES

AGY	Armour Grey	SLG	Slate Grey	HRD	Heritage Red
BCH	Birch	GUL	Gull Grey	MGN	Mist Green
MLH	Monolith	SCM	Smooth Cream	MBL	Mountain Blue
OWH	Off White	CFG	Caulfield Cream		



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700

FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

ROOFING • CLADDING • ACCESSORIES									
Product Roofing/Cladding/Accessories	Details	Code	Finish	BMT	Unit				
Stramit Mini Corry®		MK42ZA	ZA	0.42	per m²				
,	·····	**MK42T	MATT	0.42	per m ²				
<i>/////////////////////////////////////</i>		**MK42ZM8	ZM8	0.42	per m ²				
<i>/////////////////////////////////////</i>		MK42X	COL	0.42	per m²				
6mm rib height 825 cover		MK48ZA	ZA	0.48	per m ²				
offili fib fieight 023 cover		MK48X	COL	0.48	per m ²				
4	Packaging charge	PACKAGING			each				
	10 x 25 Hex Ripple Zip	S1025HRZIP4	Plain		per 1000				

^{**}Stramit Mini Corry® also available in the BlueScope Steel Premium Products range of colours for severe environments, refer page 30 Maximum length 6.0m. Minimum length 0.600m. This product is manufactured in NSW – allow additional lead times.

Prices are subject to minimum quantity and packaging charges. Additional charges will apply.



^{**}Stramit Minirib® also available in the BlueScope Steel Premium Products range of colours for severe environments, refer page 30 This product is manufactured in NSW – allow additional lead times.

Prices are subject to minimum quantity and packaging charges. Additional charges will apply

Packaging charge

Fasteners



S1225H174 12 x 25 Hex Head type 17 per 500 (fix to timber) S1225H17---4 Colour head per 500 10 x 16 Hex Head SD S1016HT4 Plain per 1000 S1016HT---4 Colour head (fix to steel) per 1000 10 x 16 Wafer Teks S1016WT4 per 1000 (fix to steel)

PACKAGING

Also available in packs of 100 - Please contact your account manager for prices.

CLADDING • ACCESSORIES									
Product Cladding/Accessories	Details	Code	Finish	BMT	Unit				
Stramit K-Panel®	Hi-Tensile Steel G550	KP35ZA	ZA	0.35	per m²				
12mm		KP42ZA	ZA	0.42	per m ²				
12mm		KP35X	COL	0.35	per m ²				
÷ ////////////////////////////////////		KP42X	COL	0.42	per m²				
864mm (±4mm) Cover	Acoustic Perforated	KP42I0WHP11	COL	0.42	per m ²				
SOATHIT (EATHIT) COVE		**KP42T	MATT	0.42	per m ²				
*Stramit K-Panel® also available in th		KP42GA	GA	0.42	per m²				
asteners	12 x 25 Hex Head type 17 (fix to timber)	S1225H174 S1225H174	Plain Colour head		per 500 per 500				
-fi	10 x 16 Hex Head SD	S1016HT4	Plain		per 1000				
	(fix to steel)	S1016HT4	Colour head		per 1000				
Flashings	Corner Mould KPCM	CMFKP7555ZA	ZA	0.55	lin metre				
Suit Stramit K-Panel® sheeting	// /	CMFKP7555X	COL	0.55	lin metre				
		CMFKP11055ZA	ZA	0.55	lin metre				
	/ /.	CMFKP11055X		0.55	lin metre				
150		CMFKP15055ZA	ZA	0.55	lin metre				
110	//	CMFKP15055X	COL	0.55	lin metre				
	/	Maximum length fo	or folded flash	ings is 8	3 metres				
Garage Barge		GBZA	ZA	0.40	lin metre				
		GBX	COL	0.40	lin metre				
27 gm. 3 ross									
×									
	Minimum length 1.000 metres.								


32



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

CLADDING • ACCESSORIES										
Product Cladding/Accessories	Details	Code	Finish	BMT	Unit					
Stramit Monopanel®	Hi-Tensile G550	MP48ZA MP48X Cutbacklth	ZA COL	0.48 0.48	per m² per m² each					
250mm Cover	Recommended maximum length 6.0m, beyond 6.0m at customer responsibility as handling damage is likely Minimum length 700mm									
<u>↓</u>	Monopanel must have co	CONPACKER ndeck packers at cust	omer's expe	ense	per m²					

Flashings - Suit Stramit Monopanel® Maximum length 3.0 metres for these flashings

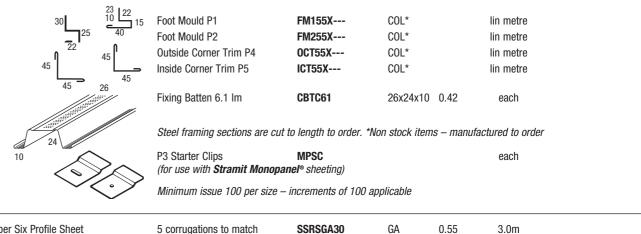



NOTE: Product must be kept dry during transport, storage and installation.

Sheet width 620mm - Sheet cover 430mm, rib height 50mm, rib centres 145mm 3.0 metre lengths only.

ROOFING • CLADDING • ACCESSORIES								
Product	Details	Cover Width mm	Ordering Code	Finish	BMT mm	Unit		
Stramit SharpLine® Direct Fix	25mm Rib (short)	290	SLS290D55X***	COL	0.55	per m²		
		490	SLS490D55X***	COL	0.55	per m ²		
	38mm Rib (tall)	265	SLT265D55X***	COL	0.55	per m ²		
		465	SLT465D55X***	COL	0.55	per m²		
Stramit SharpLine® Clip Fix	25mm Rib (short)	320	SLS320C55X***	COL	0.55	per m ²		
		520	SLS520C55X***	COL	0.55	per m ²		
	38mm Rib (tall)	285	SLT285C55X***	COL	0.55	per m ²		
		465	SLT465C55X***	COL	0.55	per m²		
Accessories suit								
SharpLine® Clip Fix	Clip (short) 25mm		SLSCGA	GA		each		
	Clip (tall) 38mm		SLTCGA	GA		each		

Available in ultra & matt finishes. Minimum length 2000, Maximum length 9000. NB: Lead time 72 hours.

Fibro cement super six sheeting

Roof pitches below 7.5° for SharpLine® direct fix and 5.0° for SharpLine® clip fix profiles require sealed side laps. All Roof lengths above 5.0m also require sealed side laps. Refer to Product Technical manual brochure for installation requirements to plywood backing.

Fasteners	Shim	10 x 16 Flathead Needle Point	S1016FNP	Plain	per box 1000
	Dumm	10 x 16 Wafer Tek (For fixing to steel)	S1016WT	Plain	per box 1000
	humanus	10 x 25 Wafer Type 17 (For fixing to timber)	S1025W17	Plain	per box 1000
			33		



TEL (03) 9237 6300 FAX (03) 9237 6399


ALBURY

TEL (02) 6092 3700 FAX (02) 6092 3766

TEL (03) 5448 6400

BENDIGO FAX (03) 5447 9677

STRAMIT UNIGUARD™ FIRE RESISTING WALL SYSTEM

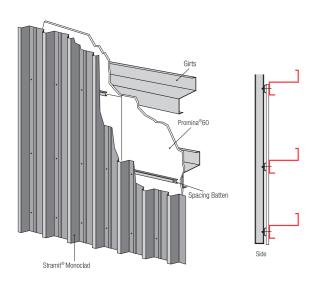

Stramit Uniguard™ Fire resisting wall

system is a superior fire rated wall cladding product that combines the single layer of specialist fireboard Promina®60 with your choice from Stramit Monoclad®, Stramit Corrugated® and Stramit Longspan® wall cladding products.

The Stramit Uniguard™ Fire resisting wall system is suitable for an external wall system for single storey Class 7b and 8 buildings of Type C construction as defined in the Building Code of Australia (BCA96).

Note: System must be designed and installed strictly in accordance with Stramit Uniguard™ Fire Resisting Wall System Technical Manual.

Using only the products specified and certified for the application as detailed in the technical manual and/or accreditation report.

Promina® 60 board can not be purchased independently of other Stramit Uniguard $\mbox{\ensuremath{^{\text{\tiny{TM}}}}}$ wall system components.

Product	Size mm	Code	Unit
Promina®60			
	15 x 2400 x 1200 *Minimum order quantity of 5 *Allow extra lead time	PB601224 sheets	each
Steel girt Bottom row of boards			
Promina®60 board	Promaseal Acrylic Sealant	PBSEAL300	
	300ml Cartridge - White		each
	300ml Cartridge - Grey		each
Stramit® Fixing Battens	Stock length 6100 - GAL		
26	26 x 24 x 10 x 6.1m	CBGA61	each
Note: ZINCALUME® steel Battens canno	ot be in contact with this system.		
Fasteners			
	10 x 45 Wing Tek (For fixing Promina®60 to girts)	S1045WNGT	per 500

Also available in packs of 100 - Please contact your account manager for prices.

Stramit. W

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

NOTES



TEL (03) 9237 6300 FAX (03) 9237 6399 ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766 **BENDIGO** TEL (03) 5448 6400 FAX (03) 5447 9677

INSULATION • ROOFING MESH Product Insulation/Roofing Mesh **Details** Code Unit Cover All Products Below May Incur A Direct Delivery Charge Aluminium Foil 439/203 Light Gr. Anti-glare FLLWAG600 72m² each FLMWAG600 1.35m x 60m Rolls 433/233 Med. Gr. Anti-glare 72m² each 456 Foil Ex Heavy Duty Sisal Tuff FLEHDST600 72m² each InsulBubble 100 FLBCAG2225 each (4.5mm thick x 1350 wide – Antiglare) FLCCFM84AG2225 30m² Foam Cell each Insulation Tape - 48mm x 500m FLTAPE48500 each **FLTACKB** Foil Fasteners (Galvanised, in strips) per 500 BB55PLN300 Glasswool Building Blanket* 55mm x 30m *(R1.3) 36m² each 55mm x 20m *(R1.3) BB55PLN200 24m² each 55mm x 15m *(R1.3) BB55PLN150 18m² each Fibreglass Building Blanket Light Weight Foil Adhered R Value Graded Permastop 55mm x 20m *(R1.3) 1.2m wide BB55LW200 24m² each Building Blanket* 55mm x 15m *(R1.3) 1.2m wide BB55LW150 18m² each BB75LW150 75mm x 15m *(R1.8) 1.2m wide 18m² each 100mm x 10m *(R2.5) 1.2m wide BB100LW100 each Fibreglass Building Blanket Medium Weight Foil Adhered 55mm x 20m *(R1.3) 1.2m wide BB55MW200 24m² each 55mm x 15m *(R1.3) 1.2m wide BB55MW150 18m² each 75mm x 15m *(R1.8) 1.2m wide BB75MW150 18m² each 100mm x 10m *(R2.5) 1.2m wide BB100MW100 12m² each *Additional freight charges apply. Conversion from m2 to linear metres is 1.2 Wall & Ceiling Batts Walls W/Batt 1160x430 R1.5 Pk24 BBW430R15 per pack Fire Stop Party Wall Batts 1200x168 Pk10 **BBWFS168** per pack BBC430R25 C/Batt 1160x430 R2.5 Pk16 8m² per pack C/Batt 1160x430 R3.5 Pk16 BBC430R35 8m² per pack Roofing Wire/Mesh 1.8m x 50m Mesh WMAUS500 each 300mm x 150mm (2.0mm thick) Powder coated Ausmesh is available in selected colours at an extra charge Both are subject to additional lead times. Emberguad 25mm x 20m 300mm wide BB25EG320 24m² per pack (pack of 4)



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

	GENERA	AL ACCESSORI	ES		
Product General Accessories	Details	Code	Finish	Unit	
Fasteners	Pop Rivets 3.2 x 7.5mm (4-3)	PR3275AL	Aluminium	pkt 100	
	Pop Rivets 3.2 x 7.5mm (4-3)	PR3275	Coloured*	pkt 100	
	Boxes of 1000 also available*				
Transmitted the same of the sa	Drive Nails 40 x 3.75mm	DN40	Pack 100	per pack	
Sealants SILICONE	Silicone Clear Silicone Grey	SILCLR SILGRY		300g tube 300g tube	
31	Available in boxes of 20				
Vermin Seal	Vermin and weather proof flashing Sold only in 3.0 lengths	VMSEALGRY30	0.55	each	
	cold only in old longue				
Roof Vent	Roof Ventilator 300mm	RV300MF RV300	Mill Finish* COL*	each each	
	SPARKGUARD	RVM300SS	OOL	each	
	SuperFlow Vents	RVSF300MF	Mill Finish*	each	
		RVSF300	COL*	each	
Box Gutter Brackets (Adjustable)	250mm - 400mm (size 1) 400mm - 650mm (size 2)	BGBA1EAZA BGBA2EAZA	24 per box 24 per box	each each	
(Aujustable)	650mm - 1000mm (size 3)	BGBA3EAZA	18 per box	each	
Builders Strapping	32mm x 1.2mm 50M Roll	BST321250	1.2mm	per roll	
	32mm x 1.6mm 50M Roll 38mm x 1.2mm 50M Roll	BST321650 BST381250	1.6mm 1.2mm	per roll per roll	
	38mm x 1.6mm 50M Roll	BST381650	1.6mm	per roll	

	P.A. DOOR									
Product P.A. Door		Size mm	Code	Finish	Unit					
Deluxe P.A. Door	820	P.A. Doors in jamb - Refer to ZINCALUME® steel P.A. Doors in jamb - Colour Pre Hung in 4 sided Powdercoated Frame 180° Outward Opening Lever Handle to inside	PADJ2040820ZA PADJ2040820X	ZA COL	each each					

^{*}Item not stocked – available to order – 10 day lead time.

^{*} R-Values To achieve an R-Value, Sisalation must have a minimum 20mm still air gap. R-Values are approximate indicators only and are based on winter values. Actual value ratings will vary with application style, for both wall and roofing purposes. For more information on Victorian Mandatory Installation Codes, or for installation advice, please contact Stramit Building Products or Fletchers Insulation, and refer to Fletchers Insulation booklet Mandatory Insulation Made Easy.



METROPOLITAN & SOUTHERN VICTORIA TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

FASCIA • ACCESSORIES									
Product Fascia/Accessories	Details	Code	Finish	Unit					
Stramit® Fascia Board Hi Tensile G550	Fascia Board	FBZA FBX **FBT **FBZM8	ZA COL MATT ZM8	lin metre lin metre lin metre lin metre					
190 190	** Fascia Cover	FBCOVZA FBCOVX **FBCOVT	ZA COL MATT	lin metre lin metre lin metre					
33 33	**Available ex-Knoxfield only Minimum length 400mm Maximum length 9.500m	y - manufactured Tuesda	y & Thursday onl	y					
**Stramit Fascia Board & accessori	•	ope Steel Premium Produ	ıcts range of cold	ours for severe environmen	ts, refer page 30				

33 33	Maximum length 9.500m				
**Stramit Fascia Board & access	cories also available in the BlueScope S	Steel Premium Produc	cts range of colo	urs for severe environments, refer pa	age 30
Accessories	Rafter Bracket (100/box)	FBRBGA	GA	each	
	Fascia Splice Plate	FBSPZA	ZA	each	
	·				
\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	External Corner 90°	FBECZA	ZA	each	
	External corner co	FBECX	COL	each	
		**FBECT	MATT	each	
		**FBECZM8	ZM8 elected colours –	each · CLC, CTG, PEC, SUR, WDG)	
			nected colours	010, 014, 120, 00H, WD4)	
(Diagon)	Internal Corner	FBICZA	ZA	each	
(Piece)		FBICX **FBICT	COL MATT	each each	
		**FBICZM8	ZM8	each	
~ ~					
	Snap Clip	FBSCZA	Plated	each	
	(Stramit O-Gee™, Stramit® Quad		Gutters)		
	Gutter Spacer	FBGS FBGST	COL GA	each	
7	Gutter Space Tool BAT overflow clip	BATOC	Plastic	each each	
4	Stiffener Bracket	1			
	(For gutter profiles please specify, Stramit 0-Gee™, Stramit® Quad	QV115HSBZA	ZA	each	
	Stramit® Easiflow Gutters	EGSB	ZA	each	
	Barge Corner (Left)	FBBCLZA	ZA	each	
Barge Corner (Right)	Bargo comor (Eort)	FBBCLX	COL	each	
		**FBBCLT	MATT	each	
		**FBBCLZM8 FBBCRZA	ZM8 ZA	each each	
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		FBBCRX	COL	each	
STRAM		**FBBCRT	MATT	each	
}		**FBBCRZM8	ZM8	each	
24					
	Barge Bracket	FBBBGA	GA	each	
81 102					
15					
105 \ \ \ \ 12	Barge Gutter (CTL)	FBBGZA	ZA	lin metre	
Γ		FBBGX	COL	lin metre	
			74		
	Apex Cover Plate	FBAJZA FBAJX	ZA COL	each each	
\ /		**FBAJT	MATT	each	
		FBAJZM8	ZM8	each	
Fasteners	6 x 25 Bugle Head (for fixing brackets to timber)	S0625BUGNP	Plain	per 1000	
1	10 x 16 Wafer Head	S1016WT4	Plain	per 1000	
	(for fixing brackets to steel)	Nana ant-store		•	
	Also available in packs of 100 - P	riease contact your ac	ccount manager	ior prices.	

38

Stramit.

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

Product Gutter/Accessories	Details	Code	Finish	BMT	Unit
Stramit® Quad 115	Stock Length 6.0m	QV115PGA6000	GA	0.42	each
High Tensile G550	Plain	QV115PZA6000	ZA	0.42	each
		QV115PX6000	COL	0.42	each
	CTL - Plain	QV115PGA	GA	0.42	lin metre
		QV115PZA	ZA	0.42	lin metre
		QV115PX	COL	0.42	lin metre
90		**QV115PT	MATT	0.42	lin metre
115		**QV115PZM8	ZMB	0.42	lin metre
	CTL - Slotted	QV115SGA	GA	0.42	lin metre
		QV115SZA	ZA	0.42	lin metre
		QV115SX	COL	0.42	lin metre
		**QV115ST	MATT	0.42	lin metre
		**QV115SZM8	ZM8	0.42	lin metre
CCSA = 5200mm ² Stramit Quad 115 & Accessories® al	Maximum length 9.500m, Il so available in the BlueScope		ange of co	lours for	severe environments, refer page 3
Accessories	Concealed Bracket	QV115CBZA	ZA		each
0.00					
Marian	Bracket Nails	DN40	Pack 1	00	per pack
	Diagnot Namo	DINTO	i doit i	00	por paox
_					
	External Bracket	QV115EBZA	ZA		each
		QV115EBX **0V115EBT	Colour		each
		**QV115EBT	Matt		each
7					
« //	Stiffener Bracket	QV115HSBZA	ZA		each
	(for Stramit® Fascia)				
^					
No.	Snap Clip (for Stramit® Fascia)	FBSCZA	Plated		each
	Gutter Spacer	FBGS	COL		each
	Gutter Space Tool	FBGST	GA		each
	Bat Clip	BATOC			each



TEL (03) 9237 6300

Cast Full Stop End (LH)

Cast Full Stop End (RH)

(length 200mm)

ALBURY TEL (02) 6092 3700

BURY BENDIGO 5092 3700 TEL (03) 5448 6400 6092 3766 FAX (03) 5447 9677

FAX (03) 9237 6399 FAX (02) 6092 3766 FAX (03) 5447 9677 **GUTTER • ACCESSORIES Product** Gutter/Accessories **Details** Code **Finish** Unit Corner Angles 90° QV115CAEMF Plain each (External cast) QV115CAEX---Colour each **QV115CAET---Matt each QV115CAIMF Plain Corner Angles 90° each (Internal cast) QV115CAIX---Colour each **QV115CAIT---Matt each QV115CAE1MF ZA Corner Angles 90°1 piece each QV115CAI1MF ZA (External) each COL QV115CAE1X--each QV115CAI1X---COL each QV115SELGA GA Stop End Plates (LH) each QV115SELZA ZA each QV115SELX---COL each **QV115SELT---MATT each ****QV115SELZM8---** ZM8 each Stop End Plates (RH) QV115SERGA GA each QV115SERZA ZA each QV115SERX---COL each MATT **QV115SERT--each ****QV115SERZM8---** ZM8 each QV115ECZA ZA Manuf. Angles each COL QV115ECX---(External) each Manuf. Angles ZA QV115ICZA each (Internal) QV115ICX---COL each Manuf. Full Stop End (LH) QV115FSLZA ZA each (length 300mm) QV115FSLX---COL each Manuf. Full Stop End QV115FSRZA ZA each (length 300mm) QV115FSRX---COL each QV115FRSELZA ZA Manuf. Full Ret. S/Ends (LH) each COL QV115FRSELX--each Manuf. Full Ret. S/Ends (RH) QV115FRSERZA ZA each QV115FRSERX---COL each

QV115CFSELMF

QV115CFSERMF

QV115CFSELX---

QV115CFSERX---

40

Plain

Plain

COL

COL

each

each

each

each



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

	GUTTER	• ACCESSO	RIES		
Product Gutter/Accessories	Details	Code	Finish	ВМТ	Unit
Quad Gutter 125mm Also available in slotted	Cut to length	QS125GA QS125SGA QS125ZA QS125SZA QS125SZ	GA GA ZA ZA COL	0.55 0.55 0.55 0.55 0.55	lin metre lin metre lin metre lin metre lin metre
60 90	Minimum order quant. 6.000m. Concealed Bracket	QS125SX Minimum length 10 QS125CBZA	COL 100mm, Maxin ZA	0.55 num lengi	lin metre th 9.000m. each
ECSA = 6200mm ²	External Bracket	QS125EBGA QS125EBZA	GA ZA		each
	Stop End Plates (LH/RH)	QS125EBX QS125SELGA QS125SELZA QS125SELX QS125SERGA QS125SERZA QS125SERX	COL GA ZA COL GA ZA COL		each each each each each each each
	Cast Angles 1 piece (External) (Internal)	QS125CAE1MF QS125CAI1MF QS125CAE1X QS125CAI1X	ZA ZA COL COL		each each each each
	Manufactured Angles (External) (Internal)	QS125ECZA QS125ECX QS125ICZA QS125ICX	ZA COL ZA COL		each each each each
	Manufactured Full Stop End (LH or RH)	QS125FSELZA QS125FSELX QS125FSERZA QS125FSERX	ZA COL ZA COL		each each each each
	Manuf. Full Return Stop End (LH or RH)	QS125FRSELZA QS125FRSELX QS125FRSERZA QS125FRSERX	ZA		each each each each
Quad Gutter 150mm Also available in slotted 90	Cut to length	QS150GA QS150SGA QS150ZA QS150SZA QS150X QS150SX	GA GA ZA ZA COL COL	0.42 0.42 0.42 0.42 0.42 0.42	lin metre lin metre lin metre lin metre lin metre lin metre
150 FCSA =6500mm ²	External Bracket	QS150EBGA QS150EBZA QS150EBX	GA ZA COL		each each each
	Stop End Plates (LH/RH)	QS150SELGA QS150SELZA QS150SELX QS150SERGA QS150SERZA QS150SERX	GA ZA COL GA ZA COL		each each each each each
	Manufactured Angles (External) (Internal)	QS150ECZA QS150ECX QS150ICZA QS150ICX	ZA COL ZA COL		each each each
	Manuf. Full Return Stop End (LH or RH)	QS150FRSELZA QS150FRSELX QS150FRSERZA QS150FRSERX	ZA		each each each each
	Manuf. Full Stop End (LH or RH)	QS150FSLZA QS150FSLX QS150FSRZA QS150FSRX	ZA COL ZA COL		each each each each

NOTE: Larger sizes & accessories in 175mm & 200mm, please allow lead time.



METROPOLITAN & SOUTHERN VICTORIA TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

	FAX (03) 9237 6399	FAX ((02) 6092 3766		FAX (03) 54	47 9677
	GUTTER	• ACCESS	ORIES			
Product Gutter/Accessories	Details	Code	Finish	ВМТ	Unit	
Stramit O-Gee™	Cut to length	OGGA OGZA	GA ZA	0.55 0.55	lin metre lin metre	
Smm 75mm	Minimum length 800mm Maximum length 9.500m.	OGX	COL	0.55	lin metre	
$CSA = 4700 \text{mm}^2$	NOTE: Larger sizes & access	sories available in	125, 150, 175	& 200mr	n, please allow ext	ra lead time.
Accessories						
Accessories	Concealed Bracket	QV115CBZA	ZA		each	
089	Bracket Nails	DN40	Pack 100		per pack	
52 J	External Bracket	OGEBZA OGEBX	ZA COL		each each	
	Stiffener Brackets QV115 (for Stramit® Fascia)	QV115HSBZA	ZA		each	
	Snap Clips (for Stramit® Fascia)	FBSCZA	Plated		each	
	Gutter Spacer	FBGS	COL		each	
	Gutter Space Tool BAT overflow clip	FBGST BATOC	GA Plastic		each each	
	Cast Cnr Angles 90° (Ext)	OGCAEZA	Plain		each	
	Cast Cnr Angles 90° (Int)	OGCAEX OGCAIZA OGCAIX	Colour Plain Colour		each each each	
	Stop End Plates (LH)	OGSELGA	GA		each	
		OGSELZA OGSELX	ZA COL		each each	
~	Stop End Plates (RH)	OGSERGA	GA		each	
		OGSERZA OGSERX	ZA COL		each each	
	Manufactured Angle (Ext)	OGECZA	GA		each	
	,	OGECX	COL		each	
	Manufactured Angle (Int)	OGICZA	GA		each	
		OGICX	COL		each	
	Manuf. Full Stop End (LH)	OGFSELZA	ZA		each	
	Length 300mm Manuf. Full Stop End (RH) Length 300mm	OGFSELX OGFSERZA OGFSERX	COL* ZA COL*		each each each	
	Manuf. Full Ret. S/End (LH)	OGFRSELZA	ZA		each	
	Manuf. Full Ret. S/End (RH)	OGFRSELX OGFRSERZA OGFRSERX	COL ZA COL		each each each	
-	*Item not normally stocked	 available to orde 	er – extended i	lead time	;	



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

raduat Cuttor/Accessories	Details	R • ACCESS	Finish	BMT	Unit	
roduct Gutter/Accessories	Details	Code	FINISN	BIVII	UNIT	
Stramit [®] Fascia Gutter			•			
Hi Tensile G550	Cut to length	FGSPGA FGSPZA	GA ZA		lin metre lin metre	
		FGSPX	COL		lin metre	
		FGSPT	MATT		lin metre	
Lip 19mm		FGSPZM8	ZM8		lin metre	
	Slotted available CTL	FGSSGA	GA	0.42	lin metre	
86mm	Olottou avallable OTE	FGSSZA	ZA	0.42	lin metre	
		FGSSX	COL	0.42	lin metre	
	Minimum length 550mm	FGSST	MATT		lin metre	
123mm 140mm	Maximum length 9.500m	FGSSZM8	ZM8		lin metre	
$ECSA = 8400 \text{mm}^2$	Not compatible with Fascia Bo	ard				
Accessories	Concealed Bracket	FGSCBZA	ZA		each	
	Bracket Nails	DN40	Pack 100		per pack	
	Stiffeners to suit					
	M/Clad, L/Span, Ultra	FGSSBZA	ZA		each	
	Stop End Plate	FGSEGA	GA		each	
		FGSEZA	ZA		each	
		FGSEX FGSET	COL MATT		each each	
		FGSEZM8	ZM8		each	
		I USLZIVIO	LIVIU		Gaoil	
Stramit® Fascia Capping	Cut to Length					
(to match Stramit® Fascia Gutter)	-	FGBCZA	ZA		lin metre	
		FGBCX	COL		lin metre	
	Minimum length 550mm					
62 127	Maximum length 9.500m					
62 127						
140						
M						
<i>V</i>						

	CONCEALED GUTTER							
Product Concealed Gutter	Details	Code	Finish	BMT	Unit			
Concealed Gutter Use with capping below 75 110° 87	Stock length 6.0m	CONGUTZA60	ZA	0.55	each			
	Stock length 6.0m	CONGUTGA60	GA	0.55	each			
Gutter Capping To suit Concealed Gutter 60 6 25	Stock length 6.0m	GUTCAPZA60	ZA	0.55	each			
	Stock length 6.0m	GUTCAPGA60	GA	0.55	each			



METROPOLITAN & SOUTHERN VICTORIA TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

	1707 (00) 0207 0000	1700 (02) 0002		170. (00) 0111 0011
	HALF-ROUND GU	JTTER • ACCES	SORIES	
Product Gutter/Accessories	Details	Code	Finish	Unit
Additional Lead Time On Items Below	- Check When Ordering			
Flatback Gutter	Available to order only	FBG133ZA	ZA	lin metre
	-	FBG133X	COL	lin metre
← 135mm →		FBG133SX	COL	lin metre
, ₁		FBG133SZA	ZA	lin metre
98mm		FBG133T FBG133ST	MATT MATT	lin metre lin metre
John			IVICTI	III IIIcac
	Minimum order quantity 6.000			
$ECSA = 7800 \text{mm}^2$	NOTE: Gutter & accessories also	o available in 180mm, ple	ase allow extra	lead time.
Accessories	Concealed Bracket	FBG133CBZA	ZA	each
	(to suit Flatback)	Fix to Timber only. Only	/ Available in pa	acks of 10
	Overstrap Bracket	FBG133SBZA	ZA	each
Som A	Ovorotrup Bruokot	Fix to Steel only	211	00011
	Bracket Nails	DN40	Pack 100	nor pook
	Cast Angles (Ext)	FBG133CAEMF	ZA	per pack each
	To suit Flatback Gutter	FBG133CAEX	COL	each
	Cast Angles (Int)	FBG133CAIMF	ZA	each
	To suit Flatback Gutter	FBG133CAIX	COL	each
		FBG133CAET	MATT	each
		FBG133CAIT	MATT	each
8	Stop End Plates (LH)	FBG133SELZA	ZA	each
	To suit Flatback Gutter	FBG133SELX	COL	each
	Stop End Plates (RH) To suit Flatback Gutter	FBG133SERZA FBG133SERX	ZA COL	each each
	Bought as pairs L & R	I Du I J J J L I I X	OOL	Cacii
	g p	FBG133SELT	MATT	each
		FBG133SERT	MATT	each
150mm Half Round	Available to order only	HRG150ZA	ZA	lin metre
130mm Haii Hound	Available to order only	HRG150SZA	ZA	lin metre
 150mm →		HRG150X	COL	lin metre
200mm →		HRG150SX	COL	lin metre
∫ 98mm		HRG150GA	GA	lin metre
(110mm)		HRG150SGA	GA MATT	lin metre
		HRG150T HRG150ST	MATT	lin metre lin metre
•	Minimum order quantity 6.000			
$ECSA = 7700 \text{mm}^2$	NOTE: Gutter & accessories also		ase allow extra	lead time.
Accessories	External Bracket	HRG150EBMF		each
	(to suit 150mm Half Round)	Only in packs of 5 HRG150EBX	COL	each
		HRG150EBT	MATT	each
	Bracket Nails	DN40	Pack 100	per pack
T. 17.				
FQ / !! n /!!	Cast Angles (Ext)	HRG150CAEMF	ZA	each
	To suit Half Round	HRG150CAEX HRG150CAET	COL MATT	each each
	Cast Angles (Int)	HRG150CAIMF	ZA	each
	To suit Half Round	HRG150CAIX	COL	each
		HRG150CAIT	MATT	each
	Stop End Plates (LH)	HRG150SELZA	ZA	each
	To suit Half Round	HRG150SELX	COL	each
	a. = . = . = . = . = . = . = . = . = . =	HRG150SELT	MATT	each
	Stop End Plates (RH)	HRG150SERZA	ZA	each
	To suit Half Round Only in pairs	HRG150SERX HRG150SERT	COL MATT	each each
	only in pairs		MALI	Odoli
	Nozzle 75 Flatback	HRG75NOZZA	ZA	each
	Halfround	HRG90NOZZA	ZA	each
		HRG100NOZZA	ZA	each
		HRG125NOZZA HRG150NOZZA	ZA ZA	each each
				Oddii

44



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

	GUTTER	· ACCESS	ORIES			
Product Gutter/Accessories	Details	Code	Finish	BMT	Unit	
Stramit® Easiflow						
High Tensile G550	Cut to length	EGP42ZA	ZA	0.42	lin metre	
// /		EGPZA	ZA	0.48	lin metre	
		EGPX	COL	0.48	lin metre	
		EGGBX EGGBZA	COL ZA		lin metre lin metre	
75mm		EUUDZA	ZA		IIII IIIeue	
	Slotted available CTL	EGS42ZA	ZA	0.42	lin metre	
124mm 118mm		EGSZA	ZA	0.48	lin metre	
* *		EGSX	COL	0.48	lin metre	
	Minimum Investigation					
	Minimum length 1000mm					
$ECSA = 7900 \text{mm}^2$	Maximum length 9.500m					
Accessories	Concealed Bracket	EGCBZA	ZA		each	
пп						
	Bracket Nails	DN40	Pack 100		per pack	
	2.40.101 114110	50	1 4011 100		por puor	
	a					
	Stop End Plates	EGSEZA	ZA		each	
1		EGSEX	COL		each	
	Stiffener Bracket	EGSB	ZA		each	
	(for Stramit® Fascia					
111						



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

FASTENERS									
roduct asteners	Details	Code	Finish	Unit					
imber Fixing									
	12 x 25 Hex Head Type 17	S1225H174 S1225H174	plain Colour	Per 500 Per 500					
	12 x 50 Hex Head Type 17	S1250H174H S1250H174 S1250H174H S1250H174	plain plain Colour Colour	Per 100 Per 1000 Per 100 Per 1000					
	12 x 65 Hex Head Type 17	S1265H174 S1265H174	plain Colour	Per 1000 Per 1000					
letal Fixing	6 x 25 Hex Head Type 17	S0625BUGNP	plain	Per 1000					
	10 x 16 Hex Head SD	S1016HT4H S1016HT4 S1016HT4H S1016HT4	plain plain colour colour	Per 100 Per 1000 Per 100 Per 1000					
	10 x 16 Wafer Teks	S1016WT4	plain	Per 1000					
Dummine.	10 x 25 Hex Ripple Zip	S1025HRZIP4	plain	Per 1000					
	12 x 30 Hex Head SD No Neo	S1230HTNN	plain	Per 1000					
	5.5 x 39 Hex Auto Tek	S1239HAT4H S1239HAT4 S1239HAT4H S1239HAT4	plain plain colour colour	Per 100 Per 1000 Per 100 Per 1000					
	5.5 x 50 Hex Auto Tek	S1250HAT4H S1250HAT4 S1250HAT4H S1250HAT4	plain plain colour colour	Per 100 Per 1000 Per 100 Per 1000					
	12 x 55 Hex Head	S1255HT4	plain	Per 1000					
oof Zips (Timber & Metal up	to 1.9mm)								
I mmm>	6 x 25 Roof Zips	S0625HZIP4 S0625HZIP4	plain colour	Per 500 Per 500					
	6 x 50 Roof Zips	S0650HZIP4H S0650HZIP4 S0650HZIP4H S0650HZIP4	plain plain colour colour	Per 100 Per 1000 Per 100 Per 1000					
	5.5 x 40 Batten Zips	S1240HMTZIP S1240HMTZIPH	plain plain	Per 1000 Per 100					
	6 x 65 Roof Zips	S0665HZIP4H S0665HZIP4 S0665HZIP4H S0665HZIP4	plain plain colour colour	Per 100 Per 1000 Per 100 Per 1000					
pecial Purpose									
	12 x 65 Polycarb Screws	TSPC1SHOTPK TSPC1SHOTT		Per 50 Per 250					
	10 x 45 Wing Tek	S1045WNGT	plain	Per 500					



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

tramit. W	KUDUGI & SEKVIGE GU	IDE 2024 (EFFECTIVE MAKCH 2024 SUPERSEDES OCTOBER 2020
	ROUND DOWNP	IPE & ACCESSORIES • GA/ZA
roduct Downpipe/Accessories	Size	Code
tramit® Downpipe ound	Standard Sizes 0.40 BMT 75 x 1800 75 x 2400	DP75GA/ZA18 DP75GA/ZA24
	Special Sizes 0.40 BMT 90 x 1800 90 x 2400	DP90ZA18 DP90ZA24
	100 x 1800 100 x 2400	DP100ZA18 DP100ZA24
	125 x 1800 125 x 2400	DP125GA/ZA18 DP125GA/ZA24
	123 X 2400	DI 123UN ZAZA
	 Offsets (450mm-600mm)	
	75 ex 1800 100 ex 1800	OS75GA/ZA OS100GA/ZA
	Special Sizes 0.55 BMT 75 x 2400/1800	DP75MGA/ZA24/18
	90 x 2400/1800 100 x 2400/1800	DP90MGA/ZA24/18 DP100MGA/ZA24/18
	125 x 2400/1800 150 x 2400/1800	DP125MGA/ZA24/18 DP150MGA/ZA24/18
	175 x 2400/1800	DP175MGA/ZA24/18
	200 x 2400/1800 225 x 2400/1800	DP200MGA/ZA24/18 DP225MGA/ZA24/18
	250 x 2400/1800	DP250MGA/ZA24/18
	275 x 2400/1800 300 x 2400/1800	DP275MGA/ZA24/18 DP300MGA/ZA24/18
	ROUND DOWNPII	PE & ACCESSORIES • COLOUR
tramit® Downpipe	Standard Sizes 0.40 BMT 75 x 1800	DP75X18
	75 x 2400	DP75X24
	Offsets (450mm-600mm)	00754
	75 ex 1800 100 ex 1800	0\$75X 0\$100X
	Special Sizes 0.55 BMT 75 x 2400/1800 90 x 2400/1800	DP75MX24/18 DP90MX24/18
		DI COMMA ET/10
	100 x 2400/1800	DP100MX24/18
		DP100MX24/18 DP125MX24/18 DP150MX24/18
	100 x 2400/1800 125 x 2400/1800 150 x 2400/1800 175 x 2400/1800	DP125MX24/18 DP150MX24/18 DP175MX24/18
	100 x 2400/1800 125 x 2400/1800 150 x 2400/1800 175 x 2400/1800 200 x 2400/1800 225 x 2400/1800	DP125MX24/18 DP150MX24/18 DP175MX24/18 DP200MX24/18 DP225MX24/18
	100 x 2400/1800 125 x 2400/1800 150 x 2400/1800 175 x 2400/1800 200 x 2400/1800	DP125MX24/18 DP150MX24/18 DP175MX24/18 DP200MX24/18



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

ROUND DOWNPIPE ACCESSORIES • GA/ZA Size

Product Downpipe/Accessories

Accessories

Stramit® Astragal (Strap) AST75GA/ZA 75mm 90mm AST90GA/ZA AST100GA/ZA 100mm 125mm AST125GA/ZA AST150GA/ZA 150mm

Pop (Nozzle) NOZ50GA/ZA 50mm NOZ75GA/ZA 75mm NOZ90GA/ZA 90mm NOZ100GA/ZA 100mm 125mm NOZ125GA/ZA NOZ150GA/ZA 150mm



Shoe (45°) 75mm

SH0E75GA/ZA 90mm SH0E90GA/ZA 100mm SH0E100GA/ZA

Elbow (90°)

75mm ELB75GA/ZA ELB90GA/ZA ELB100GA/ZA 90mm 100mm

ROUND DOWNPIPE ACCESSORIES • COLOUR

Stramit® Astragal (Strap) Accessories

AST75X---75mm 90mm AST90X---100mm AST100X---AST125X---125mm 150mm AST150X---

SPECIAL SIZE DOWNPIPE

Special Round Downpipes 1.8 & 2.4m DPSPEC

In 0.55 & 0.75BMT 100mm to 350mm diameter

Special Square Downpipes 1.8 & 2.4m **DPSPEC**

In 0.40, 0.55 & 0.75BMT


Combinations from 100 x 50mm to 200 x 200mm



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

RECTANGULAR DOWNPIPE & ACCESSORIES • GA/ZA								
Product Downpipe/Accessories	Size	Code						
Stramit® Downpipe	Standard Sizes 0.40 BMT							
Rectangular	Plain Face 0.40BMT 100 x 50 x 1800 100 x 50 x 2400 100 x 75 x 1800 100 x 75 x 2400	DP10050ZA18 DP10050ZA24 DP10075ZA18 DP10075ZA24						
	Offsets (400mm-600mm) 100 x 50 ex 1800 100 x 75 ex 1800	0S10050ZA 0S10075ZA						

RECTANGULAR DOWNPIPE & ACCESSORIES • COLOUR

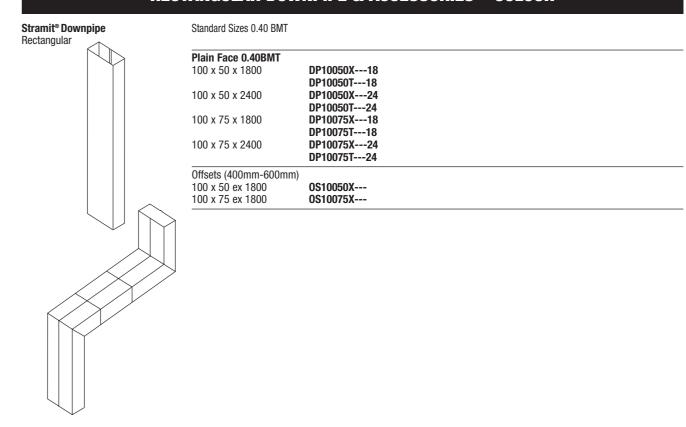



TEL (03) 9237 6300 FAX (03) 9237 6399 ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766 **BENDIGO** TEL (03) 5448 6400 FAX (03) 5447 9677

RECTANGULAR DOWNPIPE ACCESSORIES • GA/ZA

roduct Downpipe/Accessories	Size	Code

Accessories Stramit® Astragal (Strap)

Standard Sizes

100 x 50 **AST10050GA/ZA** 100 x 75 **AST10075GA/ZA**

Special Sizes

150 x 150

100 x 75

75 x 50 AST7550GA/ZA 100 x 100 AST100100GA/ZA 150 x 100 AST150100GA/ZA 150 x 150 AST150150GA/ZA

Stramit® Nozzle (Pop)

 Special Sizes
 NOZ7550GA/ZA

 75 x 50
 NOZ7550GA/ZA

 75 x 75
 NOZ7575GA/ZA

 100 x 100
 NOZ100100GA/ZA

 150 x 100
 NOZ150100GA/ZA

NOZ150150GA/ZA

SH0E10075ZA

Shoe (45°) 100 x 50 SH0E10050GA/ZA

Elbow (90°) 100 x 50 **ELB10050ZA** 100 x 75 **ELB10075ZA**

> Leaf Guard 100 x 50 **LG10050GA**

RECTANGULAR DOWNPIPE ACCESSORIES • COLOUR

AST10075T---

Accessories Stramit® Astragal (Strap)

Special Sizes 100 x 100 **AST100100X---**

150 x 100 **AST150100X---** 150 x 150 **AST150150X---**

Stramit.

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

CUSTOM FLASHINGS – ORDERING PROCEDURE

ORDERING PROCEDURE

- 1. Choose the appropriate profile type, material and finish
- 2. If Coloured, nominate the side on which colour is required
- 3. Nominate the dimensions by the letters shown on diagrams
- 4. Nominate the angles on all bends
- 5. Nominate the quantity and length of profile

EXAMPLE

- 1. Type 4, Pale Eucalypt®
- 2. Colour on side C
- 3. A 100mm, B 150mm, C 150mm, D -15mm
- 4. $AB = 90^{\circ}, BC = 90^{\circ}, AD = 45^{\circ}$
- 5. 1 off, 4.800m

CF 1	CF 2	CF 3	CF 4	CF 5
A C	A	A C	A C	D E C
CF 6	CF 7	CF 8	CF 9	CF 10
Angle C	Angle C	Angle C	A C	Angle C
CF 11	CF 12	CF 13	CF 14	CF 15
A Angle D	Angle A	C Angle D B	A D	B C D
CF 16	CF 17	CF 18	CF 19	CF 20 A
A D	B C D	A C	C	B C F
CF 21	CF 22	CF 23	CF 24	CF 25
A C C	A Angle E C	A C C	A Angle D	A C D E
CF 26 A Angle	CF 27	CF 28	CF 29	CF 30 Angle
B C	A	A C	В	A B Angle
Angle E D) _D	В	D	D
CF 31	CF 32 Angle	CF 33A	CF 34 C	CF 35
B	B B	В	A	C A
C	Angle D C	\rangle_c	□ B D	B D
CF 36 B	CF 37 (TAPERED)	DRIPMOULD (HOOK)	GAUGES IMPERIAL METRIC 26 45	
A	B ↑ .	SQUASH BREAK	24 60 22 80	
\c\\	D		Check this conversion chart before ordering your guttering, flashing or downpipes.	
			OLODDOND METALLIC CTAINL	

ALL AVAILABLE IN GALVANISED, ZINCALUME, COLORBOND, COLORBOND ULTRA, COLORBOND METALLIC, STAINLESS STEEL & COPPER

Metallic, Stainless Steel, & Copper - allow different lead times.

Maximum flashing length 8m. Subject to suitability of shape and delivery arrangements. See Delivery Details, page 9.

Order by Fax For best results, send your profile details by fax (refer nos. on top of page). Ask for our Stramit Flashing Detail Pad (see page 3).

50



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

CUSTOM FLASHINGS & FLAT SHEET

GALVANISED 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	
001-100 (B)	CF055 B00 GA	CF055 B01 GA	CF055 B02 GA	CF055 B03 GA	CF055 B04 GA	CF055 B05 GA	CF055 B06 GA	CF055 B07 GA	
101-150 (C)	CF055 C00 GA	CF055 C01 GA	CF055 C02 GA	CF055 C03 GA	CF055C04GA	CF055 C05 GA	CF055 C06 GA	CF055 C07 GA	
151-200 (D)	CF055 D00 GA	CF055 D01 GA	CF055 D02 GA	CF055 D03 GA	CF055D04GA	CF055 D05 GA	CF055 D06 GA	CF055 D07 GA	
201-250 (E)	CF055 E00 GA	CF055 E01 GA	CF055 E02 GA	CF055 E03 GA	CF055 E04 GA	CF055 E05 GA	CF055 E06 GA	CF055 E07 GA	
251-300 (F)	CF055 F00 GA	CF055 F01 GA	CF055 F02 GA	CF055 F03 GA	CF055 F04 GA	CF055 F05 GA	CF055 F06 GA	CF055 F07 GA	
301-350 (G)	CF055 G00 GA	CF055 G01 GA	CF055 G02 GA	CF055 G03 GA	CF055 G04 GA	CF055 G05 GA	CF055 G06 GA	CF055 G07 GA	
351-400 (H)	CF055 H00 GA	CF055 H01 GA	CF055 H02 GA	CF055 H03 GA	CF055 H04 GA	CF055 H05 GA	CF055 H06 GA	CF055 H07 GA	
401-500 (J)	CF055 J00 GA	CF055 J01 GA	CF055 J02 GA	CF055 J03 GA	CF055 J04 GA	CF055 J05 GA	CF055 J06 GA	CF055 J07 GA	
501-600 (L)	CF055 L00 GA	CF055 L01 GA	CF055 L02 GA	CF055 L03 GA	CF055 L04 GA	CF055 L05 GA	CF055 L06 GA	CF055 L07 GA	
601-700 (N)	CF055 N00 GA	CF055 <mark>N01</mark> GA	CF055 N02 GA	CF055 N03 GA	CF055N04GA	CF055 <mark>N05</mark> GA	CF055 N06 GA	CF055 N07 GA	
701-800 (P)	CF055 P00 GA	CF055 P01 GA	CF055 P02 GA	CF055 P03 GA	CF055P04GA	CF055 P05 GA	CF055 P06 GA	CF055 P07 GA	
801-900 (R)	CF055 R00 GA	CF055 R01 GA	CF055R02GA	CF055R03GA	CF055R04GA	CF055 R05 GA	CF055 R06 GA	CF055 R07 GA	
901-1000 (T)	CF055 T00 GA	CF055 T01 GA	CF055 T02 GA	CF055 T03 GA	CF055 T04 GA	CF055 T05 GA	CF055 T06 GA	CF055 T07 GA	
1001-1100 (V)	CF055 V00 GA	CF055 V01 GA	CF055 V02 GA	CF055 V03 GA	CF055 V04 GA	CF055 V05 GA	CF055 V06 GA	CF055 V07 GA	
1101-1200 (X)	CF055 X00 GA	CF055 X01 GA	CF055 X02 GA	CF055 X03 GA	CF055 X04 GA	CF055 X05 GA	CF055 X06 GA	CF055 X07 GA	

ZINCALUME® STEEL 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	
001-100 (B)	CF055 B00 ZA	CF055 B01 ZA	CF055 B02 ZA	CF055 B03 ZA	CF055 B04 ZA	CF055 B05 ZA	CF055 B06 ZA	CF055 B07 ZA	
101-150 (C)	CF055 C00 ZA	CF055 C01 ZA	CF055 C02 ZA	CF055 C03 ZA	CF055 C04 ZA	CF055 C05 ZA	CF055 C06 ZA	CF055 C07 ZA	
151-200 (D)	CF055 D00 ZA	CF055 D01 ZA	CF055 D02 ZA	CF055 D03 ZA	CF055 D04 ZA	CF055 D05 ZA	CF055 D06 ZA	CF055 D07 ZA	
201-250 (E)	CF055 E00 ZA	CF055 E01 ZA	CF055 E02 ZA	CF055 E03 ZA	CF055 E04 ZA	CF055 E05 ZA	CF055 E06 ZA	CF055 E07 ZA	
251-300 (F)	CF055 F00 ZA	CF055 F01 ZA	CF055 F02 ZA	CF055 F03 ZA	CF055 F04 ZA	CF055 F05 ZA	CF055 F06 ZA	CF055 F07 ZA	
301-350 (G)	CF055 G00 ZA	CF055 G01 ZA	CF055 G02 ZA	CF055 G03 ZA	CF055 G04 ZA	CF055 G05 ZA	CF055 G06 ZA	CF055 G07 ZA	
351-400 (H)	CF055 H00 ZA	CF055 H01 ZA	CF055 H02 ZA	CF055 H03 ZA	CF055 H04 ZA	CF055 H05 ZA	CF055 H06 ZA	CF055 H07 ZA	
401-500 (J)	CF055 J00 ZA	CF055 J01 ZA	CF055 J02 ZA	CF055 J03 ZA	CF055 J04 ZA	CF055 J05 ZA	CF055 J06 ZA	CF055 J07 ZA	
501-600 (L)	CF055 L00 ZA	CF055 L01 ZA	CF055 L02 ZA	CF055 L03 ZA	CF055 L04 ZA	CF055 L05 ZA	CF055 L06 ZA	CF055 L07 ZA	
601-700 (N)	CF055 N00 ZA	CF055 N01 ZA	CF055 N02 ZA	CF055 N03 ZA	CF055 N04 ZA	CF055 N05 ZA	CF055 N06 ZA	CF055 N07 ZA	
701-800 (P)	CF055 P00 ZA	CF055 P01 ZA	CF055 P02 ZA	CF055 P03 ZA	CF055 P04 ZA	CF055 P05 ZA	CF055 P06 ZA	CF055 P07 ZA	
801-900 (R)	CF055 R00 ZA	CF055 R01 ZA	CF055 R02 ZA	CF055 R03 ZA	CF055 R04 ZA	CF055 R05 ZA	CF055 R06 ZA	CF055 R07 ZA	
901-1000 (T)	CF055 T00 ZA	CF055 T01 ZA	CF055 T02 ZA	CF055 T03 ZA	CF055 T04 ZA	CF055 T05 ZA	CF055 T06 ZA	CF055 T07 ZA	
1001-1100 (V)	CF055 V00 ZA	CF055 V01 ZA	CF055 V02 ZA	CF055 V03 ZA	CF055 V04 ZA	CF055 V05 ZA	CF055 V06 ZA	CF055 V07 ZA	
1101-1200 (X)	CF055 X00 ZA	CF055 X01 ZA	CF055 X02 ZA	CF055 X03 ZA	CF055 X04 ZA	CF055 X05 ZA	CF055 X06 ZA	CF055 X07 ZA	

Flat sheets cannot be supplied as a "roll up" and will incur a palletisation charge. *NOTE: Squash = 2 bends

Stramit® Custom Flashings have a minimum Charged length of 1 metre - if you order lengths less than a metre the charge is still for 1 metre if multiple lengths are ordered.

Order by Fax or Email for best results, send your profile details by fax (order reference numbers on top of page). Ask for our Stramit Flashing Detail Pad (see page 3).

FLASHING SERVICE OFFER

GIRTH		MAX LENGTH
600	up to	8000
700	up to	7500
800	up to	7000
900	up to	6500
1000	up to	6000
1100	up to	5500
1200	up to	5000



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

CUSTOM FLASHINGS & FLAT SHEET

COLORBOND® STEEL 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	
001-100 (B)	CF055B00X	CF055B01X	CF055B02X	CF055B03X	CF055B04X	CF055B05X	CF055B06X	CF055 B07 X	
101-150 (C)	CF055 C00 X	CF055C01X	CF055 C02 X	CF055C03X	CF055 C04 X	CF055 C05 X	CF055 C06 X	CF055 C07 X	
151-200 (D)	CF055D00X	CF055D01X	CF055D02X	CF055D03X	CF055D04X	CF055 D05 X	CF055D06X	CF055D07X	
201-250 (E)	CF055 E00 X	CF055 E01 X	CF055 E02 X	CF055 E03 X	CF055 E04 X	CF055 E05 X	CF055 E06 X	CF055 E07 X	
251-300 (F)	CF055 F00 X	CF055 F01 X	CF055 F02 X	CF055 F03 X	CF055 F04 X	CF055 F05 X	CF055 F06 X	CF055 F07 X	
301-350 (G)	CF055 G00 X	CF055G01X	CF055 G02 X	CF055G03X	CF055G04X	CF055 G05 X	CF055 G06 X	CF055 G07 X	
351-400 (H)	CF055 H00 X	CF055H01X	CF055 H02 X	CF055H03X	CF055 H04 X	CF055 H05 X	CF055 H06 X	CF055 H07 X	
401-500 (J)	CF055 J00 X	CF055 J01 X	CF055 J02 X	CF055 J03 X	CF055 J04 X	CF055 J05 X	CF055 J06 X	CF055 J07 X	
501-600 (L)	CF055 L00 X	CF055L01X	CF055 L02 X	CF055 L03 X	CF055 L04 X	CF055 L05 X	CF055 L06 X	CF055 L07 X	
601-700 (N)	CF055N00X	CF055N01X	CF055N02X	CF055N03X	CF055N04X	CF055N05X	CF055N06X	CF055N07X	
701-800 (P)	CF055 P00 X	CF055P01X	CF055P02X	CF055P03X	CF055P04X	CF055 P05 X	CF055 P06 X	CF055 P07 X	
801-900 (R)	CF055 R00 X	CF055R01X	CF055R02X	CF055R03X	CF055R04X	CF055 R05 X	CF055R06X	CF055 R07 X	
901-1000 (T)	CF055 T00 X	CF055 T01 X	CF055 T02 X	CF055 T03 X	CF055 T04 X	CF055 T05 X	CF055 T06 X	CF055 T07 X	
1001-1100 (V)	CF055 V00 X	CF055V01X	CF055V02X	CF055V03X	CF055V04X	CF055 V05 X	CF055 V06 X	CF055 V07 X	
1101-1200 (X)	CF055 X00 X	CF055X01X	CF055X02X	CF055X03X	CF055 X04 X	CF055 X05 X	CF055 X06 X	CF055X07X	

ZINCALUME® STEEL 0.75 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	
001-100 (B)	CF075 B00 ZA	CF075 B01 ZA	CF075 B02 ZA	CF075 B03 ZA	CF075 B04 ZA	CF075 B05 ZA	CF075 B06 ZA	CF075 B07 ZA	
101-150 (C)	CF075 C00 ZA	CF075 C01 ZA	CF075 C02 ZA	CF075 C03 ZA	CF075 C04 ZA	CF075 C05 ZA	CF075 C06 ZA	CF075 C07 ZA	
151-200 (D)	CF075 D00 ZA	CF075 D01 ZA	CF075 D02 ZA	CF075 D03 ZA	CF075 D04 ZA	CF075 D05 ZA	CF075 D06 ZA	CF075 D07 ZA	
201-250 (E)	CF075 E00 ZA	CF075 E01 ZA	CF075 E02 ZA	CF075 E03 ZA	CF075 E04 ZA	CF075 E05 ZA	CF075 E06 ZA	CF075 E07 ZA	
251-300 (F)	CF075 F00 ZA	CF075 F01 ZA	CF075 F02 ZA	CF075 F03 ZA	CF075 F04 ZA	CF075 F05 ZA	CF075 F06 ZA	CF075 F07 ZA	
301-350 (G)	CF075 G00 ZA	CF075 G01 ZA	CF075 G02 ZA	CF075 G03 ZA	CF075 G04 ZA	CF075 G05 ZA	CF075 G06 ZA	CF075 G07 ZA	
351-400 (H)	CF075 H00 ZA	CF075 H01 ZA	CF075 H02 ZA	CF075 H03 ZA	CF075 H04 ZA	CF075 H05 ZA	CF075 H06 ZA	CF075 H07 ZA	
401-500 (J)	CF075 J00 ZA	CF075 J01 ZA	CF075 J02 ZA	CF075 J03 ZA	CF075 J04 ZA	CF075 J05 ZA	CF075 J06 ZA	CF075 J07 ZA	
501-600 (L)	CF075 L00 ZA	CF075 L01 ZA	CF075 L02 ZA	CF075 L03 ZA	CF075 L04 ZA	CF075 L05 ZA	CF075 L06 ZA	CF075 L07 ZA	
601-700 (N)	CF075 N00 ZA	CF075 N01 ZA	CF075 N02 ZA	CF075 N03 ZA	CF075 N04 ZA	CF075 N05 ZA	CF075 N06 ZA	CF075 N07 ZA	
701-800 (P)	CF075 P00 ZA	CF075 P01 ZA	CF075 P02 ZA	CF075 P03 ZA	CF075 P04 ZA	CF075 P05 ZA	CF075 P06 ZA	CF075 P07 ZA	
801-900 (R)	CF075 R00 ZA	CF075 R01 ZA	CF075 R02 ZA	CF075 R03 ZA	CF075 R04 ZA	CF075 R05 ZA	CF075 R06 ZA	CF075 R07 ZA	
901-1000 (T)	CF075 T00 ZA	CF075 T01 ZA	CF075 T02 ZA	CF075 T03 ZA	CF075 T04 ZA	CF075 T05 ZA	CF075 T06 ZA	CF075 T07 ZA	
1001-1100 (V)	CF075 V00 ZA	CF075 V01 ZA	CF075 V02 ZA	CF075 V03 ZA	CF075 V04 ZA	CF075 V05 ZA	CF075 V06 ZA	CF075 V07 ZA	
1101-1200 (X)	CF075 X00 ZA	CF075 X01 ZA	CF075 X02 ZA	CF075 X03 ZA	CF075 X04 ZA	CF075 X05 ZA	CF075 X06 ZA	CF075 X07 ZA	

Flat sheets cannot be supplied as a "roll up" and will incur a palletisation charge. *NOTE: Squash = 2 bends



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY

TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO

TEL (03) 5448 6400 FAX (03) 5447 9677

CUSTOM FLASHINGS & FLAT SHEET

GALVANISED 0.95 BMT

Girth Width		No of Bends								
(mm)	0	1	2	3	4	5	6	7		
001-100 (B)	CF095 B00 GA	CF095 B01 GA	CF095 B02 GA	CF095 B03 GA	CF095 B04 GA	CF095 B05 GA	CF095 B06 GA	CF095 B07 GA		
101-150 (C)	CF095 C00 GA	CF095 C01 GA	CF095 C02 GA	CF095 C03 GA	CF095 C04 GA	CF095 C05 GA	CF095 C06 GA	CF095 C07 GA		
151-200 (D)	CF095 D00 GA	CF095 D01 GA	CF095 D02 GA	CF095 D03 GA	CF095 D04 GA	CF095 D05 GA	CF095 D06 GA	CF095 D07 GA		
201-250 (E)	CF095 E00 GA	CF095 E01 GA	CF095 E02 GA	CF095 E03 GA	CF095 E04 GA	CF095 E05 GA	CF095 E06 GA	CF095 E07 GA		
251-300 (F)	CF095 F00 GA	CF095 F01 GA	CF095 F02 GA	CF095 F03 GA	CF095 F04 GA	CF095 F05 GA	CF095 F06 GA	CF095 F07 GA		
301-350 (G)	CF095 G00 GA	CF095 G01 GA	CF095 G02 GA	CF095 G03 GA	CF095G04GA	CF095 G05 GA	CF095 G06 GA	CF095 G07 GA		
351-400 (H)	CF095 H00 GA	CF095 H01 GA	CF095 H02 GA	CF095 H03 GA	CF095 H04 GA	CF095 H05 GA	CF095 H06 GA	CF095 H07 GA		
401-500 (J)	CF095 J00 GA	CF095 J01 GA	CF095 J02 GA	CF095 J03 GA	CF095 J04 GA	CF095 J05 GA	CF095 J06 GA	CF095 J07 GA		
501-600 (L)	CF095 L00 GA	CF095 L01 GA	CF095 L02 GA	CF095 L03 GA	CF095 L04 GA	CF095 L05 GA	CF095 L06 GA	CF095 L07 GA		
601-700 (N)	CF095 N00 GA	CF095 N01 GA	CF095 N02 GA	CF095 N03 GA	CF095 N04 GA	CF095 N05 GA	CF095 N06 GA	CF095 N07 GA		
701-800 (P)	CF095 P00 GA	CF095 P01 GA	CF095 P02 GA	CF095 P03 GA	CF095 P04 GA	CF095 P05 GA	CF095 P06 GA	CF095 P07 GA		
801-900 (R)	CF095 R00 GA	CF095 R01 GA	CF095 R02 GA	CF095 R03 GA	CF095 R04 GA	CF095 R05 GA	CF095 R06 GA	CF095 R07 GA		
901-1000 (T)	CF095 T00 GA	CF095 T01 GA	CF095 T02 GA	CF095 T03 GA	CF095 T04 GA	CF095 T05 GA	CF095 T06 GA	CF095 T07 GA		
1001-1100 (V)	CF095 V00 GA	CF095 V01 GA	CF095 V02 GA	CF095 V03 GA	CF095 V04 GA	CF095 V05 GA	CF095 V06 GA	CF095 V07 GA		
1101-1200 (X)	CF095 X00 GA	CF095 X01 GA	CF095 X02 GA	CF095 X03 GA	CF095 X04 GA	CF095 X05 GA	CF095 X06 GA	CF095 X07 GA		

ZINCALUME® STEEL 0.95 BMT

Girth Width		No of Bends								
(mm)	0	1	2	3	4	5	6	7		
001-100 (B)	CF095 B00 ZA	CF095 B01 ZA	CF095 B02 ZA	CF095 B03 ZA	CF095 B04 ZA	CF095 B05 ZA	CF095 B06 ZA	CF095 B07 ZA		
101-150 (C)	CF095 C00 ZA	CF095 C01 ZA	CF095 C02 ZA	CF095 C03 ZA	CF095 C04 ZA	CF095 C05 ZA	CF095 C06 ZA	CF095 C07 ZA		
151-200 (D)	CF095 D00 ZA	CF095 D01 ZA	CF095 D02 ZA	CF095 D03 ZA	CF095 D04 ZA	CF095 D05 ZA	CF095 D06 ZA	CF095 D07 ZA		
201-250 (E)	CF095 E00 ZA	CF095 E01 ZA	CF095 E02 ZA	CF095 E03 ZA	CF095 E04 ZA	CF095 E05 ZA	CF095 E06 ZA	CF095 E07 ZA		
251-300 (F)	CF095 F00 ZA	CF095 F01 ZA	CF095 F02 ZA	CF095 F03 ZA	CF095 F04 ZA	CF095 F05 ZA	CF095 F06 ZA	CF095 F07 ZA		
301-350 (G)	CF095 G00 ZA	CF095 G01 ZA	CF095 G02 ZA	CF095 G03 ZA	CF095 G04 ZA	CF095 G05 ZA	CF095 G06 ZA	CF095 G07 ZA		
351-400 (H)	CF095 H00 ZA	CF095 H01 ZA	CF095 H02 ZA	CF095 H03 ZA	CF095 H04 ZA	CF095 H05 ZA	CF095 H06 ZA	CF095 H07 ZA		
401-500 (J)	CF095 J00 ZA	CF095 J01 ZA	CF095 J02 ZA	CF095 J03 ZA	CF095 J04 ZA	CF095 J05 ZA	CF095 J06 ZA	CF095 J07 ZA		
501-600 (L)	CF095 L00 ZA	CF095 L01 ZA	CF095 L02 ZA	CF095 L03 ZA	CF095 L04 ZA	CF095 L05 ZA	CF095 L06 ZA	CF095 L07 ZA		
601-700 (N)	CF095 N00 ZA	CF095 N01 ZA	CF095 N02 ZA	CF095 N03 ZA	CF095 N04 ZA	CF095 N05 ZA	CF095 N06 ZA	CF095 N07 ZA		
701-800 (P)	CF095 P00 ZA	CF095 P01 ZA	CF095 P02 ZA	CF095 P03 ZA	CF095 P04 ZA	CF095 P05 ZA	CF095 P06 ZA	CF095 P07 ZA		
801-900 (R)	CF095 R00 ZA	CF095 R01 ZA	CF095 R02 ZA	CF095 R03 ZA	CF095 R04 ZA	CF095 R05 ZA	CF095 R06 ZA	CF095 R07 ZA		
901-1000 (T)	CF095 T00 ZA	CF095 T01 ZA	CF095 T02 ZA	CF095 T03 ZA	CF095 T04 ZA	CF095 T05 ZA	CF095 T06 ZA	CF095 T07 ZA		
1001-1100 (V)	CF095 V00 ZA	CF095 V01 ZA	CF095 V02 ZA	CF095 V03 ZA	CF095 V04 ZA	CF095 V05 ZA	CF095 V06 ZA	CF095 V07 ZA		
1101-1200 (X)	CF095 X00 ZA	CF095 X01 ZA	CF095 X02 ZA	CF095 X03 ZA	CF095 X04 ZA	CF095 X05 ZA	CF095 X06 ZA	CF095 X07 ZA		

Flat sheets cannot be supplied as a "roll up" and will incur a palletisation charge. *NOTE: Squash = 2 bends

NOTE:

Stramit® Custom Flashings now sold/invoiced by Finish, Girth and number of bends.

Extra charge for Tapered Cutting per Length (CFTAPER). **Stramit® Custom Flashings** available on 24hr lead time in Metro Area if ordered by 12.30pm.

Stramit® Custom Flashings have a minimum Charged length of 1 metre - if you order lengths less than a metre the charge is still for 1 metre if multiple lengths are ordered.

Minimum flashing length 600mm.

Maximum flashing length 8m.
Subject to suitability of shape and delivery arrangements.
See Delivery Details, page 9.

Order by Fax
For best results, send your profile details by fax
(refer nos. on top of page).
Ask for our Stramit Flashing Detail Pad (see page 3).



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

PREMIUM PRODUCTS • FLASHINGS

COLORBOND® ULTRA STEEL 0.55 BMT

Girth Width		No of Bends								
(mm)	0	1	2	3	4	5	6	7		
001-100 (B)	CF055 B00 U	CF055B01U	CF055 B02 U	CF055B03U	CF055B04U	CF055 B05 U	CF055 B06 U	CF055 B07 U		
101-150 (C)	CF055 C00 U	CF055C01U	CF055C02U	CF055C03U	CF055C04U	CF055 C05 U	CF055 C06 U	CF055 C07 U		
151-200 (D)	CF055 D00 U	CF055D01U	CF055D02U	CF055D03U	CF055 D04 U	CF055 D05 U	CF055 D06 U	CF055 D07 U		
201-250 (E)	CF055 E00 U	CF055 E01 U	CF055 E02 U	CF055 E03 U	CF055 E04 U	CF055 E05 U	CF055 E06 U	CF055 E07 U		
251-300 (F)	CF055 F00 U	CF055 F01 U	CF055 F02 U	CF055 F03 U	CF055 F04 U	CF055 F05 U	CF055 F06 U	CF055 F07 U		
301-350 (G)	CF055 G00 U	CF055G01U	CF055 G02 U	CF055 G03 U	CF055 G04 U	CF055 G05 U	CF055 G06 U	CF055 G07 U		
351-400 (H)	CF055 H00 U	CF055 H01 U	CF055 H02 U	CF055 H03 U	CF055 H04 U	CF055 H05 U	CF055 H06 U	CF055 H07 U		
401-500 (J)	CF055 J00 U	CF055 J01 U	CF055 J02 U	CF055 J03 U	CF055 J04 U	CF055 J05 U	CF055 J06 U	CF055 J07 U		
501-600 (L)	CF055 L00 U	CF055 L01 U	CF055 L02 U	CF055 L03 U	CF055 L04 U	CF055 L05 U	CF055 L06 U	CF055 L07 U		
601-700 (N)	CF055N00U	CF055N01U	CF055N02U	CF055N03U	CF055N04U	CF055 N05 U	CF055 N06 U	CF055 N07 U		
701-800 (P)	CF055 P00 U	CF055 P01 U	CF055 P02 U	CF055 P03 U	CF055 P04 U	CF055 P05 U	CF055 P06 U	CF055 P07 U		
801-900 (R)	CF055 R00 U	CF055R01U	CF055R02U	CF055R03U	CF055R04U	CF055 R05 U	CF055 R06 U	CF055 R07 U		
901-1000 (T)	CF055 T00 U	CF055 T01 U	CF055 T02 U	CF055 T03 U	CF055 T04 U	CF055 T05 U	CF055 T06 U	CF055 T07 U		
1001-1100 (V)	CF055 V00 U	CF055V01U	CF055V02U	CF055V03U	CF055 V04 U	CF055 V05 U	CF055 V06 U	CF055 V07 U		
1101-1200 (X)	CF055 X00 U	CF055X01U	CF055 X02 U	CF055 X03 U	CF055 X04 U	CF055 X05 U	CF055 X06 U	CF055 X07 U		

COLORBOND® METALLIC STEEL 0.55 BMT

Girth Width		No of Bends						
(mm)	0	1	2	3	4	5	6	7
001-100 (B)	CF055 B00 M	CF055B01M	CF055 B02 M	CF055 B03 M	CF055B04M	CF055 B05 M	CF055 B06 M	CF055 B07 M
101-150 (C)	CF055 C00 M	CF055C01M	CF055 C02 M	CF055C03M	CF055C04M	CF055 C05 M	CF055 C06 M	CF055 C07 M
151-200 (D)	CF055D00M	CF055D01M	CF055D02M	CF055D03M	CF055D04M	CF055 D05 M	CF055 D06 M	CF055D07M
201-250 (E)	CF055 E00 M	CF055 E01 M	CF055 E02 M	CF055 E03 M	CF055 E04 M	CF055 E05 M	CF055 E06 M	CF055 E07 M
251-300 (F)	CF055 F00 M	CF055 F01 M	CF055 F02 M	CF055 F03 M	CF055 F04 M	CF055 F05 M	CF055 F06 M	CF055 F07 M
301-350 (G)	CF055 G00 M	CF055G01M	CF055 G02 M	CF055 G03 M	CF055 G04 M	CF055 G05 M	CF055 G06 M	CF055 G07 M
351-400 (H)	CF055 H00 M	CF055H01M	CF055 H02 M	CF055 H03 M	CF055 H04 M	CF055 H05 M	CF055 H06 M	CF055 H07 M
401-500 (J)	CF055 J00 M	CF055 J01 M	CF055 J02 M	CF055 J03 M	CF055 J04 M	CF055 J05 M	CF055 J06 M	CF055 J07 M
501-600 (L)	CF055 L00 M	CF055 L01 M	CF055 L02 M	CF055 L03 M	CF055 L04 M	CF055 L05 M	CF055 L06 M	CF055 L07 M
601-700 (N)	CF055N00M	CF055N01M	CF055N02M	CF055N03M	CF055N04M	CF055N05M	CF055N06M	CF055N07M
701-800 (P)	CF055 P00 M	CF055P01M	CF055 P02 M	CF055 P03 M	CF055 P04 M	CF055 P05 M	CF055 P06 M	CF055 P07 M
801-900 (R)	CF055 R00 M	CF055R01M	CF055 R02 M	CF055R03M	CF055 R04 M	CF055 R05 M	CF055 R06 M	CF055 R07 M
901-1000 (T)	CF055 T00 M	CF055 T01 M	CF055 T02 M	CF055 T03 M	CF055 T04 M	CF055 T05 M	CF055 T06 M	CF055 T07 M
1001-1100 (V)	CF055 V00 M	CF055V01M	CF055 V02 M	CF055 V03 M	CF055 V04 M	CF055 V05 M	CF055 V06 M	CF055 V07 M
1101-1200 (X)	CF055 X00 M	CF055X01M	CF055X02M	CF055X03M	CF055X04M	CF055X05M	CF055X06M	CF055 X07 M

Minimum length 0.600mm. Maximum length 8.0 metres. Both subject to suitability of profile. **Stramit® Custom Flashings** have a minimum Charged length of 1 metre - if you order lengths less than a metre the charge is still for 1 metre if multiple lengths are ordered.



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY

TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

PREMIUM PRODUCTS • FLASHINGS

COLORBOND® STEEL MATT 0.55 BMT

Girth Width		No of Bends							
(mm)	0	1	2	3	4	5	6	7	
001-100 (B)	CF055 B00 T	CF055B01T	CF055 B02 T	CF055B03T	CF055B04T	CF055B05T	CF055B06T	CF055 B07 T	
101-150 (C)	CF055 C00 T	CF055 C01 T	CF055 C02 T	CF055 C03 T	CF055 C04 T	CF055 C05 T	CF055 C06 T	CF055 C07 T	
151-200 (D)	CF055 D00 T	CF055D01T	CF055D02T	CF055D03T	CF055D04T	CF055 D05 T	CF055D06T	CF055 D07 T	
201-250 (E)	CF055 E00 T	CF055 E01 T	CF055 E02 T	CF055 E03 T	CF055 E04 T	CF055 E05 T	CF055 E06 T	CF055 E07 T	
251-300 (F)	CF055 F00 T	CF055 F01 T	CF055 F02 T	CF055 F03 T	CF055 F04 T	CF055 F05 T	CF055 F06 T	CF055 F07 T	
301-350 (G)	CF055 G00 T	CF055 G01 T	CF055 G02 T	CF055 G03 T	CF055 G04 T	CF055 G05 T	CF055 G06 T	CF055 G07 T	
351-400 (H)	CF055 H00 T	CF055H01T	CF055 H02 T	CF055 H03 T	CF055 H04 T	CF055 H05 T	CF055 H06 T	CF055 H07 T	
401-500 (J)	CF055 J00 T	CF055 J01 T	CF055 J02 T	CF055 J03 T	CF055 J04 T	CF055 J05 T	CF055 J06 T	CF055 J07 T	
501-600 (L)	CF055 L00 T	CF055 L01 T	CF055 L02 T	CF055 L03 T	CF055 L04 T	CF055 L05 T	CF055 L06 T	CF055 L07 T	
601-700 (N)	CF055 N00 T	CF055N01T	CF055N02T	CF055N03T	CF055N04T	CF055N05T	CF055N06T	CF055 N07 T	
701-800 (P)	CF055 P00 T	CF055P01T	CF055 P02 T	CF055 P03 T	CF055 P04 T	CF055 P05 T	CF055 P06 T	CF055 P07 T	
801-900 (R)	CF055 R00 T	CF055R01T	CF055 R02 T	CF055R03T	CF055R04T	CF055 R05 T	CF055R06T	CF055 R07 T	
901-1000 (T)	CF055 T00 T	CF055 T01 T	CF055 T02 T	CF055 T03 T	CF055 T04 T	CF055 T05 T	CF055 T06 T	CF055 T07 T	
1001-1100 (V)	CF055 V00 T	CF055 V01 T	CF055V02T	CF055 V03 T	CF055 V04 T	CF055 V05 T	CF055 V06 T	CF055 V07 T	
1101-1200 (X)	CF055 X00 T	CF055 X01 T	CF055 X02 T	CF055X03T	CF055 X04 T	CF055 X05 T	CF055 X06 T	CF055 X07 T	

COLORBOND® COOLMAX® STEEL 0.55 BMT

Girth Width		No of Bends							
(mm)	0	1	2	3	4	5	6	7	
001-100 (B)	CF055B00KWHN	CF055B01KWHN	CF055B02KWHN	CF055B03KWHN	CF055B04KWHN	CF055B05KWHN	CF055B06KWHN	CF055B07KWHN	
101-150 (C)	CF055 C00 KWHN	CF055 <mark>C01</mark> KWHN	CF055 <mark>C02</mark> KWHN	CF055 <mark>C03</mark> KWHN	CF055 C04 KWHN	CF055 C05 KWHN	CF055 <mark>C06</mark> KWHN	CF055 <mark>C07</mark> KWHN	
151-200 (D)	CF055 D00 KWHN	CF055D01KWHN	CF055D02KWHN	CF055 <mark>D03</mark> KWHN	CF055D04KWHN	CF055D05KWHN	CF055D06KWHN	CF055D07KWHN	
201-250 (E)	CF055 E00 KWHN	CF055 E01 KWHN	CF055 E02 KWHN	CF055 <mark>E03</mark> KWHN	CF055 E04 KWHN	CF055 E05 KWHN	CF055 E06 KWHN	CF055 E07 KWHN	
251-300 (F)	CF055 F00 KWHN	CF055F01KWHN	CF055 F02 KWHN	CF055 F03 KWHN	CF055F04KWHN	CF055 F05 KWHN	CF055 F06 KWHN	CF055 F07 KWHN	
301-350 (G)	CF055 G00 KWHN	CF055 <mark>G01</mark> KWHN	CF055 <mark>G02</mark> KWHN	CF055 <mark>G03</mark> KWHN	CF055 G04 KWHN	CF055 G05 KWHN	CF055 <mark>G06</mark> KWHN	CF055 <mark>G07</mark> KWHN	
351-400 (H)	CF055 H00 KWHN	CF055H01KWHN	CF055H02KWHN	CF055 <mark>H03</mark> KWHN	CF055H04KWHN	CF055 H05 KWHN	CF055H06KWHN	CF055H07KWHN	
401-500 (J)	CF055 J00 KWHN	CF055 J01 KWHN	CF055 J02 KWHN	CF055 J03 KWHN	CF055 J04 KWHN	CF055 J05 KWHN	CF055 J06 KWHN	CF055 J07 KWHN	
501-600 (L)	CF055 L00 KWHN	CF055 L01 KWHN	CF055 L02 KWHN	CF055 L03 KWHN	CF055L04KWHN	CF055 L05 KWHN	CF055 L06 KWHN	CF055 L07 KWHN	
601-700 (N)	CF055 N00 KWHN	CF055N01KWHN	CF055N02KWHN	CF055 <mark>N03</mark> KWHN	CF055N04KWHN	CF055N05KWHN	CF055N06KWHN	CF055N07KWHN	
701-800 (P)	CF055 P00 KWHN	CF055P01KWHN	CF055P02KWHN	CF055P03KWHN	CF055P04KWHN	CF055 P05 KWHN	CF055P06KWHN	CF055P07KWHN	
801-900 (R)	CF055 R00 KWHN	CF055 <mark>R01</mark> KWHN	CF055 R02 KWHN	CF055 <mark>R03</mark> KWHN	CF055R04KWHN	CF055 R05 KWHN	CF055 <mark>R06</mark> KWHN	CF055R07KWHN	
901-1000 (T)	CF055 T00 KWHN	CF055T01KWHN	CF055T02KWHN	CF055T03KWHN	CF055T04KWHN	CF055 T05 KWHN	CF055 T06 KWHN	CF055T07KWHN	
1001-1100 (V)	CF055 V00 KWHN	CF055V01KWHN	CF055V02KWHN	CF055 <mark>V03</mark> KWHN	CF055V04KWHN	CF055V05KWHN	CF055V06KWHN	CF055V07KWHN	
1101-1200 (X)	CF055X00KWHN	CF055 <mark>X01</mark> KWHN	CF055 <mark>X02</mark> KWHN	CF055 <mark>X03</mark> KWHN	CF055X04KWHN	CF055 <mark>X05</mark> KWHN	CF055X06KWHN	CF055X07KWHN	

COLORBOND® STEEL COLOUR AVAILABILITY

COLORBOND® ULTRA STEEL		COLOR	COLORBOND® METALLIC STEEL		BOND® COOLMAX® STEEL	COLORBOND® STEEL MATT		
DUN	DUNE®	ARI	ARIES®	WHN	WHITEHAVEN®	BAS	BASALT® MATT	
MON	MONUMENT®	AST	ASTRO®			MON	MONUMENT® MATT	
SUR	SURFMIST®	CEL	CELESTIAN®			SUR	SURFMIST® MATT	
WLB	WALLABY®	cos	COSMIC®					
WSP	WINDSPRAY®	GLT	GALACTIC®					
WDG	WOODLAND GREY®	RHE	RHEA®					

56

Minimum length 0.600mm. Maximum length 8.0 metres. Both subject to suitability of profile. **Stramit® Custom Flashings** have a minimum Charged length of 1 metre - if you order lengths less than a metre the charge is still for 1 metre if multiple lengths are ordered.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

PREMIUM PRODUCTS • FLASHINGS

MAGNAFLOW 0.55 BMT

Girth Width		No of Bends								
(mm)	0	1	2	3	4	5	6	7		
001-100 (B)	CF055B00ZM8	CF055B01ZM8	CF055B02ZM8	CF055B03ZM8	CF055B04ZM8	CF055 B05 ZM8	CF055B06ZM8	CF055B07ZM8		
101-150 (C)	CF055 C00 ZM8	CF055C01ZM8	CF055C02ZM8	CF055C03ZM8	CF055C04ZM8	CF055 C05 ZM8	CF055 C06 ZM8	CF055 C07 ZM8		
151-200 (D)	CF055D00ZM8	CF055D01ZM8	CF055D02ZM8	CF055D03ZM8	CF055D04ZM8	CF055 <mark>D05</mark> ZM8	CF055 D06 ZM8	CF055D07ZM8		
201-250 (E)	CF055 E00 ZM8	CF055E01ZM8	CF055 E02 ZM8	CF055 E03 ZM8	CF055 E04 ZM8	CF055 E05 ZM8	CF055 E06 ZM8	CF055 E07 ZM8		
251-300 (F)	CF055 F00 ZM8	CF055F01ZM8	CF055 F02 ZM8	CF055 F03 ZM8	CF055F04ZM8	CF055 F05 ZM8	CF055 F06 ZM8	CF055 F07 ZM8		
301-350 (G)	CF055 G00 ZM8	CF055G01ZM8	CF055G02ZM8	CF055G03ZM8	CF055G04ZM8	CF055 G05 ZM8	CF055 G06 ZM8	CF055 G07 ZM8		
351-400 (H)	CF055 H00 ZM8	CF055H01ZM8	CF055 H02 ZM8	CF055 H03 ZM8	CF055H04ZM8	CF055 H05 ZM8	CF055 H06 ZM8	CF055 H07 ZM8		
401-500 (J)	CF055 J00 ZM8	CF055 J01 ZM8	CF055 J02 ZM8	CF055 J03 ZM8	CF055 J04 ZM8	CF055 J05 ZM8	CF055 J06 ZM8	CF055 J07 ZM8		
501-600 (L)	CF055 L00 ZM8	CF055L01ZM8	CF055 L02 ZM8	CF055 L03 ZM8	CF055L04ZM8	CF055 L05 ZM8	CF055 L06 ZM8	CF055 L07 ZM8		
601-700 (N)	CF055N00ZM8	CF055N01ZM8	CF055N02ZM8	CF055N03ZM8	CF055N04ZM8	CF055 <mark>N05</mark> ZM8	CF055 <mark>N06</mark> ZM8	CF055N07ZM8		
701-800 (P)	CF055 P00 ZM8	CF055P01ZM8	CF055P02ZM8	CF055 P03 ZM8	CF055P04ZM8	CF055 P05 ZM8	CF055 P06 ZM8	CF055 P07 ZM8		
801-900 (R)	CF055 R00 ZM8	CF055R01ZM8	CF055R02ZM8	CF055R03ZM8	CF055R04ZM8	CF055 R05 ZM8	CF055 R06 ZM8	CF055 R07 ZM8		
901-1000 (T)	CF055 T00 ZM8	CF055 T01 ZM8	CF055 T02 ZM8	CF055 T03 ZM8	CF055 T04 ZM8	CF055 T05 ZM8	CF055 T06 ZM8	CF055 T07 ZM8		
1001-1100 (V)	CF055V00ZM8	CF055V01ZM8	CF055V02ZM8	CF055V03ZM8	CF055V04ZM8	CF055 V05 ZM8	CF055 V06 ZM8	CF055 V07 ZM8		
1101-1200 (X)	CF055X00ZM8	CF055X01ZM8	CF055X02ZM8	CF055X03ZM8	CF055X04ZM8	CF055X05ZM8	CF055X06ZM8	CF055X07ZM8		

COLOUR AVAILABILITY

MAGNAFLOW®

AGY	ARMOUR GREY	
BCH	BIRCH	
MLH	MONOLITH	
OWH	OFF WHITE	
SLG	SLATE GREY	

Minimum length 0.600mm. Maximum length 8.0 metres. Both subject to suitability of profile.

Stramit® Custom Flashings have a minimum Charged length of 1 metre - if you order lengths less than a metre the charge is still for 1 metre if multiple lengths are ordered.



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

Finish

GA/ZA/COL each

Unit

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

RAINWATER CAPS • CRIMPED BENDS • RAINHEADS • SUMPS

Product	Size
Rainwater Crimped	Bends/Rainheads/Sumps

Crimp Bends



45°

100mm	CBG10045GA	GA	each
125mm	CBG12545GA	GA	each
150mm	CBG15045GA	GA	each
200mm	CBG20045GA	GA	each

Code


90°

100mm	CBG10090GA	GA	each
125mm	CBG12590GA	GA	each
150mm	CBG15090GA	GA	each
200mm	CBG20090GA	GA	each

Allow up to 5 working days

Rainheads

Sumps




(A x B x C) RWHSPEC

Allow extra lead time

(A x B x C)

SUMPSPEC

GA/ZA/COL each Allow extra lead time for country and interstate.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

STEEL GAS FLUE COMPONENTS						
Product Gutter/Accessories	Details	Code	Finish	Unit		
Gas Flue Pipe	75mm x .55mm BMT x 0.9m	GFP7555GA0900	GA	each		
	1.8m 2.4m	GFP7555GA1800 GFP7555GA2400	GA GA	each each		
	100mm x .55mm BMT x 0.9m	GFP10055GA0900	GA	each		
	1.8m 2.4m	GFP10055GA1800 GFP10055GA2400	GA GA	each each		
	125mm x .55mm BMT x 0.9m	GFP12555GA0900	GA	each		
	1.8m 2.4m	GFP12555GA1800 GFP12555GA2400	GA GA	each each		
	150mm x .75mm BMT x 0.9m	GFP15075GA0900	GA	each		
G	1.8m 2.4m	GFP15075GA1800 GFP15075GA2400	GA GA	each each		
	200mm x .75mm BMT x 0.9m	GFP20075GA0900	GA	each		
	1.8m 2.4m	GFP20075GA1800 GFP20075GA2400	GA GA	each each		
7 day lead time						
Bolted Sleeve	75mm	BS75GA	GA	each		
	100mm	BS100GA	GA	each		
	125mm 150mm	BS125GA BS150GA	GA GA	each each		

ROOF VENTILATION							
Product Roof Ventilation	Details	Code	Finish	Unit			
Ventilated Ridge		Standard 150mm Throat - stock lengths					
Factory Type (Tapered)	1.8 lin metre 2.4 lin metre	PURSPECVR PURSPECVR	ZA ZA	each each			
	3.5 lin metre	PURSPECVR	ZA	each			
	150mm Throat						
	Standard	PURSPECVR	ZA/COL	lin metre			
150	225mm Throat	PURSPECVR	ZA/COL	lin metre			
150							
	300mm Throat	PURSPECVR	ZA/COL	lin metre			
	380mm Throat	PURSPECVR	ZA/COL	lin metre			
			_,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				
	Stop Ends 150mm	PURSPECVR	ZA/COL	each			
	13011111	PUNSPECVN	ZAVGUL	еасп			
	225mm	PURSPECVR	ZA/COL	each			
	All other sizes loose	PURSPECVR	ZA/COL	each			
	*Refer to Sales for Vent I	Ridge packing charge – tl	his will vary with len	gth and quantity.			
	Ventilated Ridge over 300	Ventilated Ridge over 300mm throat subject to additional delivery charges – POA Maximum Length 4.5 metres.					
	Type of roof and pitch m	ust be specified.					



Downturn Lip

METROPOLITAN & SOUTHERN VICTORIA

TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766 **BENDIGO** TEL (03) 5448 6400 FAX (03) 5447 9677

C & Z PURLINS Product C & Z Purlins **Details** Code Unit Stramit® Purlins and Girts (all purlins below available in C & Z profile) C10010U *substitute "U" lin metre 565.83 C10012U with "P" in code 475.09 lin metre C10015U for punched 382.97 lin metre WHEN ORDERING USE STRAMIT DETAIL PAD. SEE P.9 C10019U purlins 304.30 lin metre C15012U 346.25 lin metre C15015U 279.11 lin metre C15019U 221.77 lin metre C15024U 176.46 lin metre C20015U 222.54 lin metre C20019U 174.46 lin metre C20024U 138.82 lin metre C25019U 153.94 lin metre C25024U 122.49 lin metre \bigcirc 300/400 Series **C30024U** 99.15 lin metre C30030U 79.63 lin metre C35024U 81.98 lin metre C35030U 65.84 lin metre C40024U 81.98 lin metre C40030U 65.84 lin metre Minimum length 1.7 metre C&Z300, 350 and 400 rolled on Friday only Cut back fee for lengths under 1.7m CUTBACKLTH Downturn Lip setup charge applies. Coating note: Coating supplied is Z350 galvanised. Other gauges and coatings of Z450 and Z600 are available under special order – POA. Please check availability at time of order.

Note: Downturn Lip available in standard C & Z 100 to 400 purlins – see above

Lapped Downturn Lip Z (except for C&Z100) also available on jobs - POA

Purlin Dimension		C Sec	tions					Z Sections				
Section	Web Depth mm	Flange Width mm	Lip Length mm	Thickness BMT mm	Section Mass kg/m	Section	ı Web Depth mm	Broad Flange mm	Narrow Flange mm	Lip Length mm	Thickness BMT mm	Section Mass kg/m
C10010	102	51	12.5	1.0	1.77	Z10010	102	53	49	12.5	1.0	1.77
C10012	102	51	13.0	1.2	2.10	Z10012	102	53	49	13.0	1.2	2.10
C10015	102	51	14.0	1.5	2.61	Z10015	102	53	49	14.0	1.5	2.61
C10019	102	51	15.0	1.9	3.29	Z10019	102	53	49	15.0	1.9	3.29
C15010	152	64	14.5	1.0	2.42	Z15010	152	65	61	14.5	1.0	2.42
C15012	152	64	15.0	1.2	2.89	Z15012	152	65	61	15.0	1.2	2.89
C15015	152	64	16.0	1.5	3.58	Z15015	152	65	61	16.0	1.5	3.58
C15019	152	64	17.0	1.9	4.51	Z15019	152	65	61	17.0	1.9	4.51
C15024	152	64	18.5	2.4	5.67	Z15024	152	65	61	18.5	2.4	5.67
C20015	203	76	16.0	1.5	4.49	Z20015	203	79	74	16.0	1.5	4.49
C20019	203	76	19.5	1.9	5.73	Z20019	203	79	74	19.5	1.9	5.73
C20024	203	76	21.0	2.4	7.20	Z20024	203	79	74	21.0	2.4	7.20
C25019	254	76	19.0	1.9	6.50	Z25019	254	79	74	19.0	1.9	6.50
C25024	254	76	20.5	2.4	8.16	Z25024	254	79	74	20.5	2.4	8.16
C30024	300	96	28.0	2.4	10.18	Z30024	300	100	93	28.0	2.4	10.18
C30030	300	96	31.5	3.0	12.68	Z30030	300	100	93	31.5	3.0	12.68
C35024	350	125	29.5	2.4	12.26	Z35024	350	129	122	29.5	2.4	12.26
C35030	350	125	30.0	3.0	15.19	Z35030	350	129	121	30.0	3.0	15.19
C40024	400	96	35.0	2.4	12.26	Z40024	400	100	93	35.0	2.4	12.26
C40030	400	96	33.5	3.0	15.19	Z40030	400	100	93	33.5	3.0	15.19


Refer Bridging 1, Bridging 2 & Purlin Girths Detailing Sheets on Pages 4,5 & 6.

Stramit.

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

C & Z PURLINS - EXACTA RANGE						
Product C & Z Purlins	Details	Code		Unit		
Stramit® Exacta Purlins						
_	'Z' Profile Range	Z15012EXP	* substitute "P" with "U" in	lin metre		
		Z15015EXP	code for unpunched purlins	lin metre		
		Z15019EXP		lin metre		
		Z15024EXP		lin metre		
\circ		Z20012EXP		lin metre		
		Z20015EXP		lin metre		
		Z20019EXP		lin metre		
		Z20024EXP		lin metre		
		Z25015EXP		lin metre		
		Z25019EXP		lin metre		
		Z25024EXP		lin metre		
		Z30024EXP		lin metre		
		Z30030EXP		lin metre		
		Z35024EXP		lin metre		
		Z35030EXP		lin metre		

Stramit Exacta-Z® purlins are dimensionally optimised for the most commonly used spans, with big improvements in capacity. The associated moment capacity tables have been developed strictly using the Stramit interlocking bridging system.

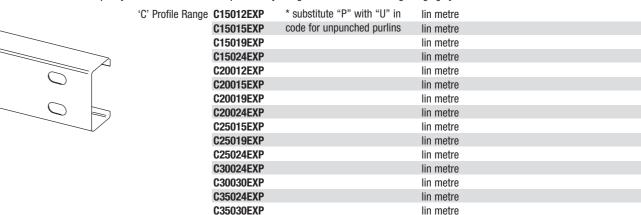

Coatings note: Coating supplied is z350 galvanised

Lengths under 1.7LM incur a cutback charge

rge

CUTBACKLTH each

Downturn Lip setup charge applies.

Stramit Exacta-C® purlins are dimensionally optimised for the most commonly used spans, with big improvements in capacity. The associated moment capacity tables have been developed strictly using the Stramit interlocking bridging system.

THE associated	moment dapacity	tables have been ac	volopou strictly using t
		CTA®C-PL S – Size ra	
Section	Web (mm)	Flange (mm)	Thickness (mm)
EC150-10	150	58	1.0
EC150-12	150	58	1.2
EC150-15	150	58	1.5
EC150-19	150	58	1.9
EC150-24	150	58	2.4
EC200-12	200	72	1.2
EC200-15	200	72	1.5
EC200-19	200	72	1.9
EC200-24	200	72	2.4
EC250-15	250	73	1.5
EC250-19	250	73	1.9
EC250-24	250	73	2.4
EC300-24	300	93	2.4
EC300-30	300	93	3.0

AND GIRTS – Size range								
Section	Web (mm)	Flange (mm)	Flange (mm)	Thickness (mm)				
EZ150-10	150	57	61	1.0				
EZ150-12	150	57	61	1.2				
EZ150-15	150	57	61	1.5				
EZ150-19	150	57	61	1.9				
EZ150-24	150	57	61	2.4				
EZ200-12	200	69	74	1.2				
EZ200-15	200	69	74	1.5				
EZ200-19	200	69	74	1.9				
EZ200-24	200	69	74	2.4				
EZ250-15	250	71	76	1.5				
EZ250-19	250	71	76	1.9				
EZ250-24	250	71	76	2.4				
EZ300-24	300	91	98	2.4				
EZ300-30	300	91	98	3.0				

STRAMIT EXACTA® Z-PURLINS

Purlins Ordering Available to order on approximately 3-5 days lead time subject to delivery days. No extra charge for hole punching.

Refer Bridging 1, Bridging 2 & Purlin Girths Detailing Sheets on Pages 4,5 & 6.



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700

FAX (02) 6092 3766

TEL (03) 5448 6400

BENDIGO FAX (03) 5447 9677



New high-tech coating for severe environments

Stramit Building Products now offers the next generation of steel purlin and Condeck HP product manufactured from ZAM coated steel.

ZAM® is a technologically advanced coated steel that allows new installation possibilities in corrosive environments. By replacing the need for post-galvanising, ZAM® products also lower material costs and reduce project lead times.

ZAM® coated steel offers better corrosion protection than conventional galvanised steel (around three times the design life) at a lower cost than products with comparable performance.

ZAM® products perform well in salt or marine atmospheres and are superior to galvanised steel in acid rain, sulphur dioxide or ammonia conditions. They also perform well in alkaline environments. They are appropriate for use near marine environments, in enclosed swimming pool complexes, in poultry, cattle and pig shed environments, as well as in high industrial environments.


The superior scratch resistance of ZAM® products helps corrosion resistance in applications subject to repeated wear. ZAM® coated steel is also concrete compatible, making it an ideal material for steel formwork decking products.

ZAM® is offered by Stramit Building Products with up to a 20 year warranty, subject to standard terms an conditions. Call Stramit Building Products for more information.

ZAM HIGH DURABILITY PURLINS

Product C & Z Purlins

ZAM High Durability Purlins



Details	Code	kg/m	M/tonne	BMT (mm)	Unit
C & Z 10015 Sections	C/Z10015*IZM	2.635	379	1.5	per metre
C & Z 10019 Sections	C/Z10019*IZM	3.310	302	1.9	per metre
C & Z 15015 Sections	C/Z15015*IZM	3.562	281	1.5	per metre
C & Z 15019 Sections	C/Z15019*IZM	4.488	223	1.9	per metre
C & Z 15024 Sections	C/Z15024*IZM	5.750	174	2.4	per metre
C & Z 20015 Sections	C/Z20015*IZM	4.534	221	1.5	per metre
C & Z 20019 Sections	C/Z20019*IZM	5.705	175	1.9	per metre
C & Z 20024 Sections	C/Z20024*IZM	7.177	139	2.4	per metre
C & Z 25019 Sections	C/Z25019*IZM	6.466	155	1.9	per metre
C & Z 25024 Sections	C/Z25024*IZM	8.134	123	2.4	per metre
C & Z 30030 Sections	C/Z30030*IZM	12.640	79	3.0	per metre

^{*} Substitute * for P = PUNCHED U = UNPUNCHED EXP = EXACTA PUNCHED EXU = EXACTA UNPUNCHED Check coil availability - extended lead times may apply

Other sizes and gauges may be available subject to mill lead times and quantities

62

Min 1.7m length

Cutback fee for lengths under 1.7m - item code is CUTBACKLTH

Purlins Ordering Available to order on approximately 3-5 days lead time subject to delivery days. No extra charge for hole punching Notching and mitre cut charges do apply - POA. Allow 2 extra days.

Refer Bridging 1, Bridging 2 & Purlin Girths Detailing Sheets on Pages 4, 5 & 6.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

ZAM Durability Statement

(Date of issue 15 June 2004)

This statement is issued to Stramit® Building Products Pty Ltd by Nisshin Steel Co., Ltd on 15 June 2004 and states the expected durability of Nisshin Steel Co., Ltd corrosion resistant hot dip coated steel sheeting product ZAMTM

The corrosion resistance of ZAM coating is a minimum 3 times that of galvanised steel sheet.

ZAM materials are made in accordance with AS 1397, purlins have a ZM350 coating and Condeck HP a ZM275 coating of protective, zinc, aluminium and magnesium. All ZAM products have the same material strength as normal product, and the normal purlin and Condeck HP load tables are valid when used

Typical Application

The superior corrosion resistance of ZAM coating means that it can replace hot dip galvanised steel

Applications are whenever severe and corrosive environments exist: intensive farming, agricultural applications, concrete contact and coastal applications.

ZAM, the highly corrosion-resistant hot dip coated steel sheet, is

 A new hot dip coated steel that has a coating layer of zinc, aluminium 6% and magnesium 3% The designation "ZAM" comes from the initials of its constituent elements Zinc, Aluminium, and Magnesium.

CUSTOM SECTIONS

Stramit® Custom Sections

At the forefront of technology, Stramit has designed the latest in computer technology roll forming equipment. This technology allows quick and easy profile changes to be made within the production cycle. This allows the production of special purlins or other shapes designed specifically for individual projects giving the best balance in performance and economy.

SIZE RANGE

Sections can be produced within the following parameters:

Web size	100mm	-	400mm
Flange size	30mm	-	130mm
Lip size	9mm	-	35mm *
Thickness	1.0mm	-	3.0mm
Material type	G300	-	G550#

^{*}Zero lip (i.e. plain channels) also available.

Web 100mm-350mm Flange 50mm-130mm subject to tooling availability

SIZES AVAILABLE

MODIFIED PURI INS

Modified purlins, Z, C or plain channel, use existing strip widths. This advantage of modifying sections within the bounds of existing strip materials allows improvements in performance - either strength or deflection - with ready access to available materials.

Lead times are, particularly if standard flange sizes are used, no more than for normal purlin orders.

CUSTOM SHAPES

Designed for specific purposes, these sections may be used for a variety of applications but usually require a specific strip size, which requires extended lead times for ordering and are subject to a minimum order quantity criteria.

63

Contact your local Stramit office for cost estimates for tooling of special flange sizes and any special holes.

HOLES

The facility to provide special holes at almost any location is also available.

Section properties and load tables for modified or custom profiles may be possible for larger projects by means of the latest in computer programs written for this purpose.

DOWNTURN LIP -Standard & Lapped Z

These features are available on purlin projects - POA

Custom Sections Subject to special enquiry - POA. They are cut to length, custom punched from galvanised material. Alternative materials are available upon request

Refer Bridging 1, Bridging 2 & Purlin Girths Detailing Sheets on Pages 4, 5 & 6.

[#] May vary dependent upon material thickness.



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700

TEL (02) 6092 3700 FAX (02) 6092 3766 **BENDIGO** TEL (03) 5448 6400 FAX (03) 5447 9677

BRIDGING GENERAL

Stramit® Bridging GENERAL INFORMATION

To enhance performance in longer spans, bridging is generally used. Where wind uplift loading is dominant, greater economy can generally be achieved by using additional bridging in the end spans. The performance of purlins is improved considerably when the roof or wall cladding is attached, so bridging is normally required to ensure easy installation of cladding. Generally, bridging spacing should not exceed 20 times the section's depth, (eq. over 3000mm for a 150mm deep section).

CONVENTIONAL BRIDGING/STRUTS

Conventional bridging usually consists of a suitable channel section fitted with end plates which is bolted between parallel purlins.

INSTALLATION OF STRAMIT BRIDGING

Stramit® Bridging can be installed up or down the roof slope. The system includes adjustable ridge and fascia bridging and boltless intermediate members.

For convenience, start by installing the fascia bridging by bolting to the fascia purlin. Pass the locator end of the bridging through the purlin bridging holes, swing the bridge around to be perpendicular to the web of the purlin and lock any preceeding bridge in place.

Proceed up the slope to the ridge and install the ridge bridging. The adjustable ridge bridge (turnbuckle) allows the purlins to be pulled straight and the adjustment mechanism in the fascia bridging can adjust the fascia purlin for straightness and twist.

Please contact your local Stramit office for details of component assemblies suitable for other installation procedures.

HOLING


Stramit Purlins and Girts have standard 18mm x 22mm holes punched to details supplied. Refer to punching schedule below.

Stramit® Purlin/Girt	'A' mm
C100	40 (A)
C150	60 (A) or 70 (VIC)
C200	110 (A)
C250	110 (VIC) or 160 (A)
C300	210 (A)
C350	260 (A)

'A' = A.I.S.C. > Hole Spacing


NOTE: 1. Non standard hole centres are available.

- 2. Holes can be punched anywhere on purlin. (including Flange)
- 3. Slot 16 x 32mm for diagonal bracing.
- 4. Round ${\it O}$ holes available, contact your local Stramit office for details.

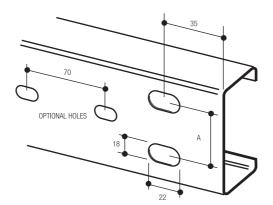

SAMPLE LAYOUT

	Mark No. Overall length No. Required Hole Centres (d)					Total Metres					
As Drawn	PI	6000	1	40	60	70	110	160	210	260	6
Opp. Hand	PA	6000	1	40	60	70	110	160	210	260	6

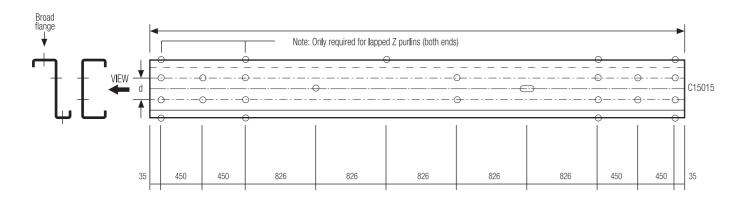

64

Refer Bridging 1, Bridging 2 & Purlin Girths Detailing Sheets on Pages 4, 5 & 6.

Stramit.

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

BRIDGING • ACCESSORIES

Product Bridging/Accessories Details Code Unit

WHEN ORDERING USE STRAMIT DETAIL PAD. SEE P.6 & 7

BRIDGING HOLE CENTRES


HEAVY DUTY BRIDGING

Braket Size	Hole Centres	Braket Size	Hole Centres	Braket Size	Hole Centres	Braket Size	Hole Centres
100	40	200	110	300	210	350	260
150	60	250V	110				
150V	70	250	160				

Stramit® Bridging

Intermediate

Fixed Bridging Assemblies

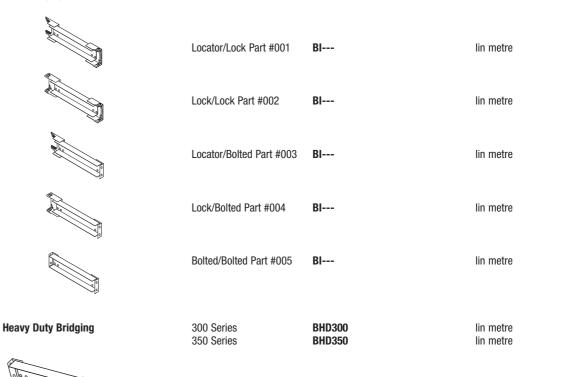



Bridging Codes Start with 'B' and use the part No. and the purlin size. For bridging to suit C/Z 150 add a 'V' for Victorian 70 H/Cs. Maximum bridging length 3.0 metres.

65

Threaded Rod				
	Sag Rod – Cut to Length fully threaded, 1LM or 3LM	BSR16ZP	Zinc plated 16mm	lin metre
	1			
	Stock Sag Rods Fully threaded	BSR12ZP	Zinc plated 12mm	lin metre
	(lengths 300-1900 in 50mm i Allow 10 days lead time for no	,	refer Stramit office for	prices.
	Starter Clip Part #006	BSC100		each
		BSC150		each
]]		BVSC150		each
8 0		BSC200		each
-		BSC250		each

Refer Bridging 1, Bridging 2 & Purlin Girths Detailing Sheets on Pages 4, 5 & 6.



ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

METROPOLITAN & SOUTHERN VICTORIA TEL (03) 9237 6300 FAX (03) 9237 6399

	BRIDGING •	ACCESSORIES	
Product Bridging/Accessories Do	etails	Code	Unit
Stramit® Bridging Ridge/Intermediate Bolted Bridging Assemblies	WHEN ORDERING USE STRAMIT DETAIL	G . Pad.	
Adjustable Fixed	Locater/Lock Part #007	BR (Adjustable)	lin metre
	Part #008	BIS (Fixed)	lin metre
	Lock/Lock Part #009	BR (Adjustable)	lin metre
	Part #010	BIS (Fixed)	lin metre
	Locater/Locator Part #011	BR (Adjustable)	lin metre
	Part #012	BIS (Fixed)	lin metre
	Locater/Bolted Part #013	BR (Adjustable)	lin metre
	Part #014	BIS (Fixed)	lin metre
	Lock/Bolted Part #015	BR (Adjustable)	lin metre
	Part #016	BIS (Fixed)	lin metre
	Bolted/Bolted Part #017	BR (Adjustable)	lin metre
	9 Part #018	BIS (Fixed)	lin metre
Fascia Bridging Assemblies	Locator Part #019	BF	lin metre
FB			
LK FB	Lock Part #020	BF	lin metre
LR LK	Locator/Lock Part #021	BF	lin metre
LK TO THE LK	Lock/Lock Part #022	BF	lin metre
BO FB	Bolted Part #023	BF	lin metre

66

Refer Bridging 1, Bridging 2 & Purlin Girths Detailing Sheets on Pages 4,5 & 6.

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

	BRIDGING • ACCESSORIES							
Product Bridging/Accessories	Details	Code	Unit					
Stramit® Bridging Girt Stool/Foot Assemblies	WHEN ORDE USE STRAMIT DE	RING Tail Pad.						
	Locator Part #024	BGF	each					
	Lock Part #025	BGF	each					
	Strut & Rod Part #026	BGF	each					
Girt Hanger Assemblies								
Turnbuckle/Tie Rod	Locator Part #027	BGHTB (Adjustable)	each					
	Part #028	BGHTR (Fixed)	each					
	Lock Part #029	BGHTB (Adjustable)	each					
	Part #030	BGHTR (Fixed)	each					
	Strut & Rod – bolted Part #031	BGHTB (Adjustable)	each					
	Part #032	BGHTR (Fixed)	each					
	FAS	CIA PURLINS						
		23019FP 23019FU	lin metre lin metre					
C pu	ow extra lead time 3-4 weeks. nched or unpunched. ate roof pitch angle when orderi	ng						

67

Refer Bridging 1, Bridging 2 & Purlin Girths Detailing Sheets on Pages 4,5 & 6.



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO

TEL (03) 5448 6400 FAX (03) 5447 9677

PURLINS & GIRTS – GENERAL ACCESSORIES

Product	Product Details	Code	Unit
Purlins & Girts – Accessories			
Accessories	Tie Rod Angle	BTRA	each
	Bridging Ends Locator	BLR100	each
	bridging Ends Eductor	BLR150	each
		BVLR150	each
Res O		BLR200	each
		BLR250	each
	Bridging Ends Lock	BLK100	each
		BLK150	each
1000		BVLK150	each
<u> </u>		BLK200	each
		BLK250	each
	Bridging Ends Bolted	BB0100	each
		BB0150	each
0 40		BVB0150	each
		BB0200	each
		BB0250	each
		BBOHD300	each
	Bridging Channel	BC69GA	lin metre
	Slotted Channel 2 Hole	BSC2H0	each
	3 Hole	BSC3HO	each
	5 Hole	BSC5H0	each
	General Purpose Bracket	BGPB100GA	each
0		BGPB150GA	each
0 0		BGPB200GA	each
600		BGPB250GA	each
			each
	Angle Connectors	BAC100	each
00		BAC150	each
(0,0)		BAC200	each
		BAC250	each
Ť		BAC300	each
	Clamp Plate	BCP100GA	each
0		BCP150GA	each
		BCP200GA	each
		BCP250GA	each
	Raking Girt Bracket	BRGB100	each
	Adaptor Bracket	BAB150100L/RGA	each
	(Right hand shown)	BAB200100L/RGA	each
	, ,	BAB200150L/RGA	each
~ *		BAB250100L/RGA	each
0			each
		BAB250200L/RGA	each
			each
	Purlin & Fascia Bolts		
	M12 x 30 (GR4.6) Flanged	PB1230ZP	each
	M12 x 30 Fascia Bolts	PBF1230GA	each

68

Refer Bridging 1, Bridging 2 & Purlin Girths Detailing Sheets on Pages 4,5 & 6.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

FORMWORK						
Product Formwork	Product Details	Code	ВМТ	Unit		
Stramit Condeck HP®	Hi Tensile steel G550	CONHP75LG	0.75	per m²		
	300mm effective cover	CONHP90LG	0.90	per m²		
	Low Glare	CONHP100LG	1.00	per m²		
27.5	10 x 16 Hex Teks (no neoprene washers)	S1016HTNN4		per 1000		
300	g brochures					
Stramit Condeck HP® ZAM	Hi Tensile steel G550 300mm effective cover	CONHP100IZM	1.00	per m²		

ZAM COATED CONDECK HP


The corrosion resistance of ZAM coating is a minimum 3 times that of galvanised steel sheet.

Condeck HP® Plus

ZAM, the highly corrosion-resistant hot dip coated steel sheet, is

 A new hot dip coated steel that has a coating layer of zinc, aluminium 6% and magnesium 3% • The designation "ZAM" comes from the initials of its constituent elements Zinc, Aluminium, and Magnesium.

lin metre




Product manufactured at Knoxfield – allow extra 1 or 2 days lead time for delivery outside

metropolitan area – ask for details

Other thicknesses available subject to quantity and lead time POA

CONHPP100GA

Stramit® Edgeforma



100mm	CONEF100GA	0.95	lin metre
125mm	CONEF125GA	0.95	lin metre
150mm	CONEF150GA	0.95	lin metre
175mm	CONEF175GA	0.95	lin metre
200mm	CONEF200GA	0.95	lin metre
250mm	CONEF250GA	1.20	lin metre

Available cut to length to of 8.0m at listed rates.

* Stramit® Edgeforma can be custom made to slab height.



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

FRAMING • BATTENS Code **Finish BMT Product** Framing/Battens **Details** Size Unit Stud, Nogging, Plate SBS7512UTC TC Standard Stud (red) 75mm 75x30 1.2 per metre SBS7512PTC TC 75x30 1.2 per metre Standard Plate SBP7812UTC TC 78x28 1.2 per metre SBP7812PTC TC 78x28 1.2 per metre Standard Nogging SBN7212UTC TC 72x32 1.2 per metre SBN7212PTC TC 72x32 1.2 per metre PA Door Stud SBS6912UTC 69x33 TC 1.2 per metre SBS6912PTC TC 69x33 1.2 per metre *3 day lead time Steel framing sections are cut to length to order. 32mm diameter holes available at additional cost. Also available punched. Please substitute "U" with "P" in product code when ordering. Roof Batten Roof Batten 6.0m RBV40TC6000 TC 40x40x15 0.48 each Roof Batten 7.5m RBV40TC7500 TC 40x40x15 0.48 each per 1000 S1240HMTZIP 40mm Batten Zip Also available in packs of 100 - please contact your account manager for prices. TC 24x26x10 0.42 Ceiling Batten 6.1m CBTC61 each Stramit® Trim Angle 30 x 30 TA3012GA GA 1.2 lin metre 50 x 50 TA5012GA GA 1.2 lin metre TA3875ZA ZΑ 38 x 38 0.75 lin metre Minimum length 100mm Maximum length 10.000m Stramit® Top Hat Batten NOTE: Minimum Length 1.500 metres Tapered End $(A \times B \times C \times D)$ 50mm Top Hat TH5075ZA ZA 0.75 lin metre* (50 x 34 x 20 x 6) TH50100ZA ZA 1.00 lin metre* TH6475ZA 64mm Top Hat ZA 0.75 lin metre* (64 x 34 x 20 x 6) TH64100ZA ZA 1.00 lin metre* TH7575ZA ZA 0.75 75mm Top Hat lin metre* TH75100ZA ZΑ 1.00 (75 x 34 x 20 x 6) lin metre* 96mm Top Hat TH9675ZA ZΑ 0.75 lin metre* (96 x 34 x 20 x 6) TH96100ZA ZA 1.00 lin metre* ZA 120mm Top Hat TH12070ZA 0.70 lin metre* (120 x 40 x 25 x 10) TH12090ZA ZΑ 0.90 lin metre*

Cut to length product available on standard lead times ex Knoxfield.

120mm (only) Top Hat manufactured in NSW - 10 working day lead time, other sizes available cut to length or in stock sizes. Maximum length 7.500 metres.

70



'In Plane' System

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

FLOORING • ACCESSORIES



Designed to meet the needs of domestic and light commercial construction, Stramit® Metal Floor Sections offer an economical, easy to use solution to floor framing and construction.

With a wide range of section sizes offering freedom in design of floor joists, bearers, pier sizes and location, the Stramit® Metal Floor Sections adapt to a variety of house designs and conditions

These new section shapes also offer up to 30% more load capacity or 9% greater spanning performance than

The in-plane system saves building height or headroom and reduces brick or cladding costs.

• High tensile steel – for high strength and low weight

- Z350 Galvanised coating to give long term protection to the steel base. Z350 coating exceeds
- Deeper sections 235mm and 283mm joists allow for over 100mm pipe penetrations and standard toilet bends under floor
- 235mm joist matches 3 courses of bricks
- Full range of sections for economic design
- Designed to resist bounce uses the latest technology to prevent low frequency vibration in the floor structure
- A complete system with joists, bearers, brackets and accessories

Product Flooring/Accessories	Details	Code	Unit
Stramit® Flooring			
Joists	182 x 12 182 x 15	J18212 J18215	lin metre Iin metre
	182 x 19	J18219	lin metre
	182 x 24	J18224	lin metre
	235 x 15	J23515	lin metre
	235 x 19	J23519	lin metre
\v_///	235 x 24	J23524	lin metre
	283 x 19	J28319	lin metre
	283 x 24	J28324	lin metre
O Boorers	> 100 v 10	D40040	lin moteo
Bearers	182 x 19 182 x 24	B18219 B18224	lin metre Iin metre
	> 102 x 21 235 x 19	B23519	lin metre
	235 x 24	B23524	lin metre
	283 x 19	B28319	lin metre
	283 x 24	B28324	lin metre
	*5 day lead time		
Brackets	Angle Brackets	FCB1B	each
		(for B235/283 only)	
bearer FCB1 bracks	t joist		
© 9		FCB1A	each
6 3	J	(Suit B182)	
3 screws pi	er side		
position FCB3 down against			
flange up to 10 fasteners	FCB3A 140mm	FCB3A	each
it lasteriers	(suit B182)		
load on bottom flange	FCB3B 190mm	FCB3B	oooh
pipe	(suit B235)	LCDOD	each
Fasteners	10 x 16 Hex Head no neo	S1016HTNN4	per 1000
	Floor Screw 10G x 45	S1045WNGT	per 500
	Floor Screw 14G x 22	S1422HTNN4	per 500
	Also available in packs of 100) - please contact your accou	nt manager for prices.
Observations (Sections	Doubles also 400	F014PT400400	and the same of th
Structural Sections	Post top edge 180mm Fin Plate x 100mm	FSMPT180100	each
	Suit 90mm SHS		
	5411 5511111 5115		
	Post top centre 180mm	FSMPCT90	each
	Fin Plate x 90mm	. 0 0.00	outil
4.	Suit 90mm SHS		
	SHS Stump tube	FSMST9013580	each
	90x90x2mm 8 mtr		
	1		
	Post base fixed 100mm	FSMPFB100	each
	Suit 90mm SHS		

^{*}A complete flooring system take off service is now available upon request. Please contact your Stramit Account Manager



Fasteners

METROPOLITAN & SOUTHERN VICTORIA

TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

FAX (02) 6092 3766 **PATIO ROOFING DECKING** Ordering Code **Product** Details BMT Unit mm Roofing/Cladding/Accessories Stramit Sunset® Sunset Decking CLC/Classic Cream™ 80GL SS42DLCLC per m² Sunset Decking WIL/Classic Cream™ 80GL SS42DL07 per m² Sunset Decking SUR/Dover White 80GL SS42DL05 per m² Sunset Decking PPB/Paperpark® 80GL SS42DLPPB per m² Sunset Decking WDG/Classic Cream™ 80GL SS42DL09 per m² 290 Overall Sheet Width 335 To convert prices to linear metres multiply by cover of sheet (ie 0.290). **Gloss colour is on the bottom. Please confirm at time of order. All Product packaged for maximum protection. Price quoted is an effective cover per square metre price. Fibreglass To suit Stramit Sunset® sheeting TSWGSS240PL lin metre (available in opal only) Sunset® Foam Insert Infill strip for Stramit Sunset® sheeting SSWS3787 each (310mm) Fibreglass Foam Insert Infill strip for Stramit Sunset® fibreglass sheeting SSWS3788 each (290mm) Sunset® Back Channel Available in 3.0 & 5.0m stock lengths only RCSSHCLC30/50 each RCSSHDVW30/50 each RCSSXPPB30/50 each R2.5 RCSSZA30/50 each

DOUBLE SIDED ROOFING							
Stramit® Corrugated	SUR/Dover White 80GL CLC/Classic Cream™ 80GL PPB/Paperbark® 80GL	C42DL05 C42DLCLC C42DLPPB	0.42 0.42 0.42	m² m² m²			
Stramit® Monoclad	SUR/Dover White 80GL CLC/Classic Cream™ 80GL PPB/Paperbark® 80GL	MC42DL05 MC42DLCLC MC42DLPPB	0.42 0.42 0.42	$\begin{array}{c} m^2 \\ m^2 \\ m^2 \end{array}$			
Stramite Longspan	SUR/Dover White 80GL CLC/Classic Cream™ 80GL PPB/Paperbark® 80GL	LS42DL05 LS42DLCLC LS42DLPPB	0.42 0.42 0.42	$\begin{array}{c} m^2 \\ m^2 \\ m^2 \end{array}$			

Also available in packs of 100 - please contact your account manager for prices.

S1016HT4

Plain

\$1016HT---4 Colour per pack 1000

per pack 1000

Gloss on underside only. This product is manufactured in NSW – allow additional lead time.

10 x 16 Hex Head SDS

(for fixing to steel)

72



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

COLORBEAM							
		Details	Ordering Code	Finish	BMT mm	Flange Thickness mm	Unit
50mm 0.55mm → ←	100mm	Colorbeam 100x50 4.0m Colorbeam 100x50 4.0m Colorbeam 100x50 6.0m Colorbeam 100x50 6.0m	CSB10011LCLC40 CBS10011HDVW40 CSB10011LCLC60 CBS10011HDVW60	Classic Cream [™] Dover White Classic Cream [™] Dover White	0.55 0.55 0.55 0.55	1.1 1.1 1.1 1.1	each each each each
	150mm	Colorbeam 150x50 4.0m Colorbeam 150x50 6.0m Colorbeam 100x50 6.0m Colorbeam 150x50 8.0m Colorbeam 100x50 6.0m	CSB15015LCLC40 CSB15015LCLC60 CBS15015HDVW60 CSB15015LCLC80 CSB15015HDVW80	Classic Cream™ Classic Cream™ Dover White Classic Cream™ Dover White	0.75 0.75 0.55 0.75 0.55	1.5 1.5 1.1 1.5 1.1	each each each each

Lead Time 10 Days for large qty's

10 Units Per Pack



METROPOLITAN & SOUTHERN VICTORIA TEL (03) 9237 6300 FAX (03) 9237 6399 **BENDIGO** TEL (03) 5448 6400 FAX (03) 5447 9677 **ALBURY** TEL (02) 6092 3700 FAX (02) 6092 3766

	COLORBE	AM		
	Details	Ordering Code	Finish	Unit
	Colorbeam Framing Bracket 100	CSAFB100LCLC	Classic Cream™	each
+	Colorbeam Framing Bracket	CSAFB100HDVW	Dover White	each
+	Colorbeam Framing Bracket 150	CSAFB150LCLC	Classic Cream™	each
.	Colorbeam Framing Bracket	CSAFB150HDVW	Dover White	each
	Colorbeam Framing Bracket 200	CSAFB200CLC	Classic Cream™	each
	Colorbeam Frame Bracket 100 22deg	CSAFB10022CLC	Classic Cream™	each
		CSAFB10022HDVW	Dover White	each
	Colorbeam Frame Bracket 150 22deg	CSAFB15022CLC	Classic Cream™	each
		SAFB15022HDVW	Dover White	each
	Colorbeam Angle Bracket AB100 Cream	CSAB100LCLC	Classic Cream™	each
	Colorbeam Angle Bracket AB150 Cream	CSAB150LCLC	Classic Cream™	each
	Colorbeam Angle Bracket AB100 White	CSAB100HDVW	Dover White	each
(15° and 22.5°)	Colorbeam Angle Bracket AB150 White	CSAB150HDVW	Dover White	each
	Colorbeam Corner Bracket CB100 Cream	CSCB100LCLC	Classic Cream™	each
	Colorbeam Corner Bracket CB150 Cream	CSCB150LCLC	Classic Cream™	each
	Colorbeam Corner Bracket CB100 White	CSCB100HDVW	Dover White	each
	Colorbeam Corner Bracket CB150 White	CSCB150HDVW	Dover White	each
	Colorbeam Posts 90 x90 3 metre	SSP9020LCLC3000	Classic Cream™	each
	Colorbeam Posts 90 x90 3 metre	SSP9020HDVW3000	Dover White	each
	Colorbeam Posts 90 x90 4 metre	SSP9020LCLC4000	Classic Cream™	each
	Colorbeam Posts 90 x90 4 metre	SSP9020HDVW4000	Dover White	each



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

	FENCING • A	V C C C C D I E	:c		
		AUUE-SSUMIE			
Product Fencing/Accessories	Product Details	Code	Finish	BMT mm	Unit
Infill Sheets	Stramit Monoclad® Fencing				
	Stock Lengths Sheeting 2.090	SFGLCL2090	COL	0.35	each
	Sheeting 1.790 Sheeting 1.490	SFGLCL1790 SFGLCL1490	COL COL	0.35 0.35	each each
	Chooling 1.400	OI UEUE 1400	OOL	0.00	odon
	Also available Cut to length in all colours				
Infill Sheets	Sawtooth Fencing Stock Lengths				
	Sheeting 2.090	SFGLST2090	Colour	0.35	each
	Sheeting 1.790 Sheeting 1.490	SFGLST1790 SFGLST1490	Colour Colour	0.35 0.35	each each
	-				
This product is not a COLORBOND®	steel product				
Rails Top & Bottom	Rail Top/Bottom 2.370 Rail Top/Bottom 3.100	SFGLR2370 SFGLR3100	Colour Colour		each each
	Fence Rail Cap	SFGLRC	Colour		each
	(Cut in two for single caps)				
This product is not a COLORBOND®	steel product				
Fence Posts	Post 2.700 Post 2.400	SFGLP2700 SFGLP2400	Colour Colour		each each
	Post 2.100	SFGLP2100	Colour		each
This product is not a COLORBOND®	steel product				
Lattice	Standard Lattice 0.300 x 3.100 Standard Lattice 0.300 x 2.350	SFLFZ3003100 SFLFZ3002350	Colour		each
	Standard Lattice 0.300 x 2.350	SFLFZ3002550	Colour Colour		each each
	Standard Lattice 0.300 x 0.815	SFLFZ3000815	Colour		each
	Premium Lattice 0.300 x 2.370	SFL3002350	Colour		each
This product is not a COLORBOND®	steel product				
Panel 2.400 x 1.800	Standard Panel includes 2 x Rails 2.370	-with Monoc	clad		
	2 x Fence Posts 2.400				
	3 x Infill Sheets 1.790 Total Price Std Panel				See next page for
	15 x Screws 10 x 16 Hex Head				
	NB: Price does not include screws or rai	l caps			gates, end posts, other
MET ONE	Standard Panel with Std Lattice includ	les -with Mono	clad		accessories
	3 x Rails 2.370 2 x Fence Posts 2.400				and colour chart
	3 x Infill Sheets 1.490 1 x Std Lattice 0.300 x 2.350				
	Total Price Std Panel				
	22 x Screws 10 x 16 Hex Head				
	NB: Price does not include screws or rai	· · · · · · · · · · · · · · · · · · ·	_ .		
29X5X5X5X5X5X5X5X5X5X5X5X5X5X5X	Std Panel with Premium Lattice include 4 x Rails 2.370	les -with Monod	ciad		
	2 x Fence Posts 2.400 3 x Infill Sheets 1.490				
	Premium Lattice 0.300 x 2.370				
	Total Price Std Panel		_		
	23 x Screws 10 x 16 Hex Head				
	10 x 16 Hex Tek No Neo Pack 1000 (minimum pack of 100)	S1016HTNN4	Colour		per 1000

74



TEL (03) 9237 6300 FAX (03) 9237 6399 ALBURY TEL (02) 6092 3700 FAX (02) 6092 3766 **BENDIGO** TEL (03) 5448 6400 FAX (03) 5447 9677

FENCING • ACCESSORIES Product Product Details Code Finish **BMT** Unit Fencing/Accessories mm **Corner/Gate Posts** Gate Post 65mm x 65mm x 2400mm SFGP65---2400 Colour each Gate Post 65mm x 65mm x 2700mm SFGP65---2700 Colour each Gate Post Cap 65mm x 65mm SFGPC65---Black or Grey each only **Post Balls** Post Ball Single SFGLPBS---Colour each Post Ball Double SFGLPBD---Colour each Post Ball Single 50 x 50 SFGLPBS50---Colour each Post Ball Single 65 x 65 SFGLPBS65---Colour each **Gate Kits Gate Height** Single Gate Frame Kit SFGKS---1200 Colour 1200 each SFGKS---1500 Colour 1500 each SFGKS---1650 Colour 1650 each SFGKS---1800 Colour 1800 each SFGKD---1200 1200 **Double Gate Frame Kit** Colour each SFGKD---1500 Colour 1500 each SFGKD---1650 Colour 1650 each SFGKD---1800 Colour 1800 each **Fence Gate Support Bkt Lattice** SFGSBLGA each

Gate Kit comprises - Gate Styles, Zinc Plated Hinges, Zinc Plated D-Latch set, Gate Caps, Hex Head Tek Screws, and Drop bolts on double gates.

Order separately - Infill sheet/s, Rail/s, Gate Posts & Gate Post Caps as required.

Specify gate opening width when ordering gate.

HOW TO ORDER:

	Fence									
Panel	Number	Profile?	Profile? Lattice? End Posts? Colour?							
Height*	of Panels	M=Monoclad	Yes/No	S=Standard	65x65	Number of	Infill	Posts &	Lattice	End
		S=Sawtooth	1 69/110	P=Premium	OUNUU	End Posts	Sheets	Rails		Posts
1500					2400					
1800					2400					
2100					2700					

*Height includes lattice (if required)

	Standard Gates										
Gate	Gate Type?	Profile?	Latt	Lattice? Gate Posts?		Colour?					
Height*	S=Single	M=Monoclad	Yes/No	S=Standard	CEVCE	Number of	Infill	Posts &	Lattice	Gate	
	D=Double	S=Sawtooth	162/110	P=Premium	remium 65x65	Gate Posts	Sheets	Rails		Posts	
1200					2400						
1500					2400						
1650					2400						
1800					2400						
2100					2700						

76

*Height includes lattice (if required)

Colour	Availability Use	Screws
Bluestone®	Mountain Blue	DOC
Domain®	Primrose	CLC
Estate®	Ironbark EST	
Evergreen®	Caulfield Green	CTG
Grey Ridge®	Slate Grey	WDG
Harvest®	Wheat	HAR
Meadow®	Mist Green	PEC
Red Oak®	Heritage Red	MNR
Riversand®	Stone	RSD
Summershade®	Moss Vale Sand	SMS
Terrace®	Merino	PPB
Willow®Rivergum	WIL	
Eclipse®	Ebony	ECL

® Trademarks of BlueScope Steel Limited.

Some colours may be subject to minimum quantities and lead times. Please contact your nearest Stramit sales office.

Note: Gates Styles not available in all sizes in stock colours. Please contact your nearest Stramit sales office.

Stramit.

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

T	'AUREAN° RESID	ENTIAL A	ND COMMER	CIAL RO	DLLER	DOOR	COLOU	RS
		COLO	RBOND® STEEL COLO	UR NAMES				
BAS	Basalt®	HED	Headland®		PPB	Paperba	ark®	
CLC	Classic Cream™	IST	Ironstone®		SHG	Shale G	irey™	
CTG	Cottage Green®	JAS	Jasper®		SUR	Surfmis	st® _	
COV	Cove®	MGV	Mangrove®		TRN	Terrain [®]	0	
DOC	Deep Ocean®	MNR	Manor Red®		WAL	Wallaby	r ®	
DUN	Dune®	MON	Monument®		WDG	Woodla	nd Grey®	
EVH	Evening Haze®	NTS	Night Sky®		WIL	Wildern	ess®	
GLY	Gully®	PEC	Pale Eucalypt®		WSP	Windsp	ray®	
MATT		COLOURGR	AIN	SELF-S	TORAGE / N	IINI WARE	HOUSE	
BAS	Basalt® Matt	CAO	Caoba®	DVW	Dover W	hite	MAN	Mandarin Orange
MON	Monument® Matt	CCE	Classic Cedar®	LAZ	Lazurite	Blue	POP	Poppy Red
SUR	Surfmist® Matt							113

TAUREAN RESIDENTIAL ROLLER DOORS

DOMESTIC PR1ME SERIES 'A' AND 'AA', WINDLOCK AND WINDSTRONG

Product Details	Discount Group Code	Finish	Code	Unit
Series A - Standard, WindLock or WindStrong options	7T	ZA	RDAZA	Ea
		COL	RDAhhCOLwwww	Ea
Series AA - Standard, WindLock or WindStrong options	7V	ZA	RDAAZA	Ea
		COL	RDAAhhCOLwwww	Ea

	Available in ZA, STD COLORBOND®, Matt and Colourgrain Domestic Roller Door									
	Series 'A' Doors (curtain width in mm)						Series	'AA' Doors (c	urtain width i	n mm)
	Width									
Height (mm)	750 to 1550	1551 to 1850	1851 to 2550	2551 to 2800	2801 to 3100	3101 to 3430	3431 to 3750	3750 to 4350	4351 to 5100	5101 to 5400
1200										
2200										^
2500										٨
2800										
3100										

[^] Not available in WindLock

ORDERS TO BE PLACED AS DOOR SIZE (not opening width)

To calculate curtain width, add to opening width -

• 50mm for Series A

• 100mm for Series AA

• 100mm for WindLock option • 110mm for WindStrong option

TAUREAN LIGHT INDUSTRIAL ROLLER DOORS

LIGHT INDUSTRIAL COMMANDO SERIES 'B', WINDLOCK AND WINDSTRONG

Product Details	Discount Group Code	Finish	Code	Unit
Series 'B' - Standard, WindLock or WindStrong options	7R	ZA	RDBZA	Ea
		COL	RDBCOL	Ea

	A	vailable in ZA	, COLORBOND	® steel, COLOF	RBOND® steel I	Matt and Colo	urgrain Dome	stic Roller Do	or	
				Series 'B' Do	ors (curtain v	width in mm)				
	Width									
Height (mm)	750 to 1550	1551 to 1850	1851 to 2550	2551 to 2800	2801 to 3100	3101 to 3430	3431 to 3750	3750 to 4350	4351 to 5100	5101 to 5400
2200										
2500										
2800										
3100										
3500										
3900										
4300										
4600										
5100										

ORDERS TO BE PLACED AS DOOR SIZE (not opening width)

To calculate curtain width, add to opening width -

50mm for Series A100mm for WindLock option

100mm for Series AA110mm for WindStrong option

Product DetailsCodeUnitPlanetary Gear Chain SystemRDPLANETGEAREa

It is recommended that Planetary Gear Chain operating system be fitted to doors in shaded areas.

Planetary Gear system MUST NOT be used when an electric operator is fitted.



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY TEL (02) 6092 3700

FAX (02) 6092 3766

BENDIGO TEL (03) 5448 6400 FAX (03) 5447 9677

TAUREAN® RESIDENTIAL ROLLER DOORS - KEY POINTS

	PR1ME SERIES ROLLER DOOR WINDLOCK	CONFIGURAT	TION	
Wind	Classification (AS/NZS 4505-2012)	MAXIMU	M DOOR WII	OTH (mm)
Classification	Ultimate Wind Pressure	0 - 3650	5016 - 5100	
N1	< 4.0m: inwards 0.69kPa outwards -0.73kPa > 4.0m: inwards 0.69kPa outwards -0.63kPa	Wind		
N2	< 4.0m: inwards 0.95kPa outwards -1.02kPa > 4.0m: inwards 0.95kPa outwards -0.87kPa	0.		3.7 clips/m
N3	< 4.0m: inwards 1.49kPa outwards -1.59kPa > 4.0m: inwards 1.49kPa outwards -1.37kPa		3.9 clips/m	4.1 clips/m

Wind Cla	assification	MAXIMUM DOOR WIDTH (mm)					
	N3	0 - 3650	3651 - 5015	5016 - 5100			
	Fy INWARDS	5.5	6.2	8.2			
ABUTMENT	Fx INWARDS	17.7	22.7	29.4			
FORCES (kN/m)	Fy OUTWARDS	9.5	9.5	11.2			
	Fx OUTWARDS	26.3	30.7	40.7			

Taurean Doors Systems certify that this door meets the ultimate wind pressure ratings of Australian Standard AS/NZS 4505 and is fit for purpose in Regions A and B (non-cyclonic areas) of Australia when installed according to instructions. See taureands.com.au for details.

Tapers for Sloping Floors – Roller Doors

Taurean Pr1 me Series Roller Doors are available with tapered curtains to suit floors with a slope across the door opening. Minimum and maximum taper sizes apply, please contact Taurean Customer Service on 1800 778 658 or via customerservice@taureands.com.au for further information.


WINDSTRONG™ Roller Door - Domestic and Medium General Purpose (20,000 cycles) AUSTRALIAN STANDARD 4505 COMPLIANT


Steel Guide Track	ULTIMATE CYCLONIC WIND PRESSUR				SURE			
Door Width (mm)	2550	2800	3100	3430	3750	4350	5100	5400
Inwards Ultimate Wind Pressure Rating (kPa)	6.27	5.76	5.20	4.64	4.17	3.46	2.89	2.76
Outwards Ultimate Wind Pressure rating (kPa)	7.24	6.91	6.50	6.02	5.54	4.59	3.31	2.77
Domestic Cyclonic Region Ratings (door width mm)	C4 up to 2770				C2 t 51	ip to 00	C2 up to 5400	


Aluminium Guide Track	U	LTIMA	TE CYC	CLONIC	WIND	PRES	SURE	
Door Width (mm)	s 2550	s 2550 2800 3100 3430			3750	4350	5100	5400
Inwards Ultimate Wind Pressure Rating (kPa)	6.79	6.13	5.53	4.91	4.38	3.53	2.75	2.53
Outwards Ultimate Wind Pressure rating (kPa)	6.79	6.13	5.53	4.91	4.38	3.53	2.75	2.53
Domestic Cyclonic Region Ratings (door width mm)	C3 up to 3430			C2 ι 45	ip to 50	C1 up to 5400		

TAUREAN ROLLER DOOR INSTALLATION

For further information please refer to the Installation Guides at www.taureands.com.au or contact Customer Service 1800 778 658.

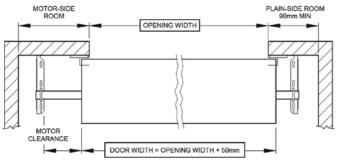

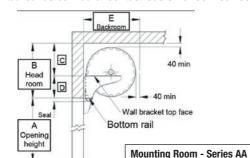

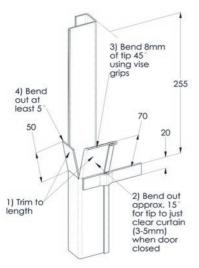

Mounting Room - Series A								
Table 1: Mounting Room (mm)								
A B C D E								
1200	430	265	165	450				
2200	440	270	170	475				
2500	455	275	180	495				
2800	485	295	190	505				
3100	495	300	195	515				

3100	495	300	195	515						
Mountir	Mounting Room - Series B									
Table 1: Mounting Room (mm)										
A B C D E										
2200	440	270	170	485						
2500	455	275	180	505						
2800	485	295	190	515						
3100	495	300	195	525						
3900	515	310	205	545						
4600	550	325	225	575						
5100	560	330	230	585						

Table 1:	Table 1: Mounting Room (mm)									
Α	В	C	D	E						
1200	430	265	165	460						
2200	440	270	170	485						
2500	455	275	180	505						
2800	485	295	190	515						
3100	495	300	195	525						

Mounting Room - NovaTaur Commercial								
Table 1: Mounting Room (mm)								
A B C D E								
485	290	195	500					
520	310	210	540					
520	310	210	540					
555	330	225	575					
585	345	240	610					
	10untin B 485 520 520 555	Room (B C 485 290 520 310 555 330	Room (mm) B C D 485 290 195 520 310 210 520 310 210 555 330 225					

Mounting Room - NovaTaur Residential								
Table 1: Mounting Room (mm)								
Α	В	C	D	E				
2500	455	290	165	450				

Stramit. W

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

TAUREAN® RESIDENTIAL SECTIONAL DOORS - CLASSIC RANGE



Linea: Grooved / Lined



Western: Pressed Rectangles



Tempo: Pressed Squares



Silk: Flat Panels

		WIDTH	BOND® STEEL IN WOODGRAIN, WOODGRAIN TIMBERGRAIN & WOODGRAIN POWDERCOATED COLOURS WIDTH									
Height	# Panels	1820 to 2500	2501 to 2800	2801 to 3200	3201 to 3700	3701 to 4150	4151 to 4450	4451 to 4740	4741 to 4950	4951 to 5510	5511 to 5930	5931 to
1920, 1940, 1960, 1980, 2000, 2020, 2040, 2060, 2080, 2100, 2120, 2140, 2160, 2180	4											
2200, 2225, 2250, 2275	5											
2300, 2325, 2350, 2375, 2400, 2425, 2450	5											
2475, 2500, 2525, 2550, 2575, 2600, 2625, 2650, 2675, 2700, 2725	5											
2760, 2790, 2820, 2850, 2880, 2910, 2940, 2970, 3000	6											

Tapers for Sloping Floors – Classic Sectional Doors

Taurean Classic Sectional Doors are available with a tapered bottom panel to suit floors with a slope across the door opening. Minimum and maximum taper sizes apply, please contact Taurean Customer Service on 1800 778 658 or via customerservice@taureands.com.au for further information.

LOW HEADROOM KIT- FRONT MOUNTED ONLY - MINIMUM HEADROOM 2200mm

Product Details	Length	Code	Unit
SD Track Pair LHR 2.591	2591	SDTPRLHRGA2591	Ea
SD Track Pair LHR 2.895	2895	SDTPRLHRGA2895	Ea
SD Track Pair LHR 3.200	3200	SDTPRLHRGA3200	Ea
SD Track Kit Bag LHR		SDTKITBLHR	Ea

Please refer to the Taurean website (www.taureands.com.au) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.




ALBURY

BENDIGO TEL (03) 5448 6400

TEL (03) 9237 6300 TEL (02) 6092 3700 FAX (03) 9237 6399 FAX (02) 6092 3766 FAX (03) 5447 9677


TAUREAN® RESIDENTIAL SECTIONAL DOOR INSTALLATION - KEY POINTS

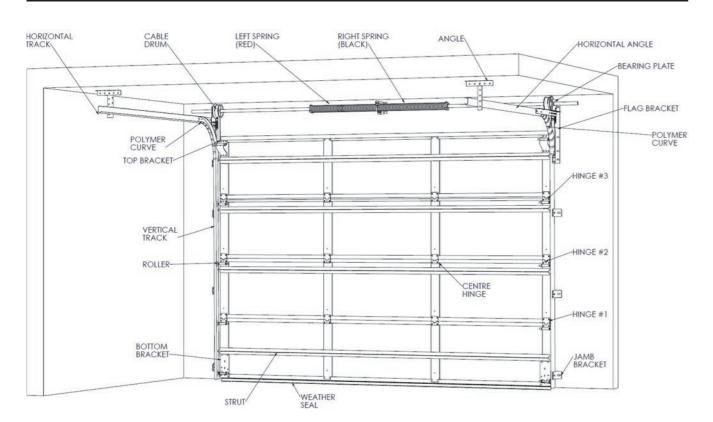



Check opening height and door size.

- a. 25-30mm overlap on each side and >10mm at top.
- b. At least 150mm side room required.

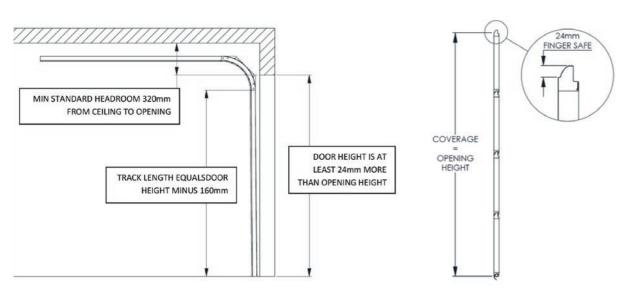

Please refer to the Taurean website (www.taureands.com.au) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.

Stramit. W

PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

TAUREAN® NOVATAUR ROLLER DOORS

Taurean NovaTaur Residential Roller Door

Product Details Finish Unit Taurean Novataur Residential Roller Door Col RNR25C0Lwwww Ea

Refer to COLORBOND® steel colours												
	Width											
Height (mm)	2500 to 2550	2551 to 2800	2801 to 3100	3101 to 3600	3601 to 3750	3751 to 4100	4101 to 4350	4351 to 4800	4801 to 5100	5101 to 5400	5401 to 5500	5501 to 6000
2500												

Taurean NovaTaur Commercial Roller Door

Product Details	Finish	Code	Unit
Taurean Novataur Commercial Roller Door	ZA	RNChhZAwwww	Ea
	Col	RNChhCOLwwww	Ea

	Width							
Height (mm)	2500 to 2800	2801 to 3100	3101 to 3430	3431 to 3750	3751 to 4350	4351 to 51000	5101 to 5500	5501 to 6000
2500								
3100								
3400								
4300								
5100								

Product Details Code Unit Planetary Gear Chain System **RDPLANETGEAR** Ea

It is recommended that Planetary Gear Chain operating system be fitted to doors in shaded areas.

Planetary Gear system MUST NOT be used when an electric operator is fitted.

TAUREAN ROLLER DOOR PACKAGING OPTIONS				
Packaging Product Details	Code	Unit		
Cardboard Box up to 3430 door width	RDCHRGPACK9	Ea		
Cardboard Box up to 3710 door width	RDCHRGPACK10	Ea		
Cardboard Box up to 4930 door width	RDCHRGPACK19	Ea		
Enviropack 1 single layer cardboard outer up to 3430mm door width	RDCHRGPACK15	Ea		
Enviropack 1 single layer cardboard outer up to 3431 - 5400mm door width	RDCHRGPACK16	Ea		
Enviropack 2 double layer cardboard outer up to 3430mm door width	RDCHRGPACK17	Ea		
Enviropack 2 double layer cardboard outer up to 3431 - 5400mm door width	RDCHRGPACK18	Ea		
Metal Wrap Packaging per lineal metre	RDCHRGPACK2	Ea		

TAUREAN PERSONAL ACCESS (PA) DOOR Pre Hung PA Door 2040 x 820mm ZΑ PADJ2040820ZA Ea COL PADJ2040820X*** Ea Pre Hung PA Door 2040 x 920mm ZΑ PADJ2040920ZA Ea COL PADJ2040920X*** Ea Heavy Duty Entrance Knob Set -11 ZΑ PAD2040820ZA Ea Personal Access (PA) Door 2040 x 820mm COL PAD2040820X*** Ea Personal Access (PA) Door 2040 x 920mm PAD2040920ZA Ea COL PAD2040920X*** Ea **SPECIFICATIONS**

Please refer to the Taurean website (www.taureands.com.au) or **contact Taurean Door Systems** Customer Service on 1800 778 658 for assistance.

- Taurean Door Systems standard offer is a single skin metal clad door: 2040mm high x 820mm wide x 37mm thick and 2040mm high x 920mm wide x 37mm thick
- Metal cladding is 0.55mm thick COLORBOND® steel
- Outward swing is standard
- Heavy duty Knob/Knob Lockset as standard (with Pre-Hung Door only), Lever/Knob available upon request
- Chrome cabin hook supplied as standard (with Pre-Hung Door only)
- Pre-Hung verson comes with three, 100 x 65 x 2mm high quality colour matched hinges



TEL (03) 9237 6300 FAX (03) 9237 6399

ALBURY

TEL (02) 6092 3700 FAX (02) 6092 3766

BENDIGO

TEL (03) 5448 6400 FAX (03) 5447 9677

TAUREAN® ROLLER DOOR ACCESSORIES

Product Details	Code	Unit
Roller Door Openers - Merlin		
RD Motor SilntDrv Elite 855BBU	RDMOTORSE855BB	Ea
RD Motor SiIntDrv Elite 855MYQ	RDMOTORSE855MQ	Ea
RD Motor SilntDrv Essen 655MYQ	RDMOTORSS655MQ	Ea
RD Motor Weather Drive 550EV0	RDMOTORWD55EVO	Ea
Roller Door Openers - GRIFCO RD Motor eDrive 2.0 (ML5102 Kit) Left Hand Max door area with 150mm drum = 36m² Max door area 200mm drum = 50m²	RDMOTORED20KL	Ea
RD Motor eDrive 2.0 (ML5102 Kit) Right Hand	RDMOTORED20KR	Ea
Grifco LR-Drive (GLD-RD0)	RDMOTOR1300LRD	Ea
Sectional Door Operators - MERLIN		
SD Motor ComElite 105BBU	SDM0TCE105BB	Ea
SD Motor ComElite 105MYQ	SDMOTCE105MQ	Ea
SD Motor ComEssen 65MYQ	SDMOTCS65MQ	Ea
SD Motor ComUlt 3800MYQ	SDMOTCU3800MQ	Ea
SD Motor ComExt 125 2.4C MYQ	SDM0TCX125C24	Ea
SD Motor ComExt 125 2.4R BBU	SDM0TCX125X24B	Ea
SD Motor ComExt 125 3.0R BBU	SDM0TCX125X30B	Ea
SD Motor Whisper Drive 3850EVO	SDM0TWD3850EV0	Ea
Operator Accessories		
RD Merlin Evercharge Standby Power Unit	RDMERECSRPH	Ea
Merlin Battery Backup Kit - Suitable for residential roller & sectional door operators		Ea
RD Merlin handset 3 button Chl.		E
RD Merlin handset Mini 3 button transmitter		Ea
4 Button Hand Transmitter		Ea
RD Merlin Keyed Cable Release Steel		Ea
RD Merlin Keypad Wireless S2.0		Ea
RD Merlin Connect Bundle MYQ		Ea
RD Merlin Remote Light LED MYQ		Ea
Wall Mount Wireless TrioCode		Ea
TrioCode Wireless Keypad	RDGD0KPW	Ea

Please refer to the Taurean website (www.taureands.com.au) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.

82



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

TAUREAN® PRODUCT WARRANTY

Stramit Corporation Pty Limited Roller Door Warranty and Exclusion of Liability Statement

This Warranty is given by:

Stramit Corporation Pty Limited trading as Taurean Door Systems (Taurean)

1051 Nudgee Road, Banyo, QLD, 4014

Phone: (03) 9721 8366 | Email: customerservice@taureands.com.au | Website: www.taureands.com.au

On Taurean® roller door kits (Product) for a twelve-month period from the date of purchase of the Product, against defects which is subject to the matters set out below (Warranty).

The Warranty is in addition to your rights and remedies that may be available to consumers under the Australian Consumer Law. If you are a consumer, as defined under the Australian Consumer Law, our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

This Warranty applies only where:

- The purchaser seeking to rely on the Warranty presents proof of purchase to confirm the date of purchase of the Product;
- If the Product has been installed, an authorised Taurean Door reseller or professional roller door installer (Authorised Installer) performed the installation; and
- Taurean determines, in its absolute discretion, that the Product has a defect covered by this Warranty.

Your Product Warranty does not apply to any defect, loss or damage arising through or caused directly or indirectly by, or as a result of:

- Fair wear and tear (e.g. working seals in the inlet and outlet valves, scratching from cleaning, paint rubs or scuffing on the internal wash coat finish or external painted finish etc.):
- Any defects or deterioration of timber, including drying, after installation of the Product;
- Any weakening, cracking, deterioration, or collapse of the structure or surface, during installation or use, to which the Product is (or is intended to be) affixed:
- Incorrect storage or handling of the Product after delivery:
- Failure to properly install, use or maintain the Product, or to follow any instructions or guidelines for installation, use or maintenance of the Product, including carrying out regular servicing or preventative maintenance;
- The continued use or operation of the Product after any defect becomes apparent, or would have become apparent to a reasonably prudent operator or user;
- Installation, adjustment or use of the Product, other than by Taurean or an Authorised Installer;
- . Attempted or completed modifications or repairs to the Product carried out by a person who is not authorised by Taurean to carry out such modifications or repairs;
- The use of the Product, within 800 metres of the sea or other body of water of equivalent or greater salt concentration or in an area subject to chemical or industrial fall out, or otherwise than for any application specified on a quote or order form, price book or catalogue issued by Taurean: or
- Any accident or act of God.

To make a valid claim under this Warranty, a person must submit a claim in writing to Taurean at the abovementioned address within twelve months from the date of purchase of the Product. The claim must include:

- A copy of this Warranty:
- A description and evidence of (e.g. photo) how the Product is defective;
- The date on which the person making the claim discovered the defect;
- Proof of the date of purchase of the Product in the form of an invoice or receipt; and
- If the Product has been installed, proof of the date of installation of the Product in the form of an invoice or receipt from an Authorised Installer.

Where a valid Warranty claim is made in accordance with clause 6 above. Taurean will investigate the claim, and requires reasonable and adequate access to Products, to undertake its investigation. If a Warranty service call finds that your Product does not have a genuine manufacturing defect, or the claim is resolved by a regular service (that comes under the responsibility of the purchaser) Taurean reserves the right to charge you a service fee.

To the fullest extent permitted by law, Taurean expressly excludes all conditions, warranties and undertakings in relation to the Products except as set out in this document.

To the fullest extent permitted by law, and subject to and without limiting your consumer rights under the Australian Consumer Law, Taurean expressly limits its liability under this Warranty and under any other statutory guarantee imposed at law to, at its absolute discretion:

- Replacing or repairing the Product;
- The supply of an equivalent Product; or
- The payment of the cost of the Product, or of repairing the Product, or of acquiring an equivalent Product.

This Warranty is not transferrable, and only applies to the original purchaser. Wherever the Product is sold by any person other than Taurean, such person has no authority whatsover from Taurean to give any express warranty or quarantee on any Taurean producy in addition to this Warranty.



TERMS & CONDITIONS OF SALE

View our latest Terms and Conditions of Sale here: https://www.stramit.com.au/terms-and-conditions/



VICTORIA

