

Stramit® Fascia Batten

- Easy installation
- Protects fascia from following trades
- Minimises call backs
- Provides a stable foot position on the truss chord
- Reduces replacement costs



Stramit® Fascia Batten

Protects fascia – saves costs.

The Stramit® Fascia Batten protects pre-installed fascia against foot traffic damage by creating a guard behind it. The strong, low-profile batten is installed at the same time as the metal fascia, on the rafter ends, using standard fasteners.

By providing a trafficable barrier, the Stramit® Fascia Batten reduces the risk of roofers accidentally treading on the pre-installed fascia during roofing installation. This saves on the cost of replacing damaged fascia and brackets, as well as saving time in call-backs to reinstall the fascia.

The Stramit® Fascia Batten also increases safety by aiding slip prevention and reducing the risk of potential falls. On steel roofing installations, the batten acts as a slip guard, providing the last line of secure footing.

Installation and fixing




Installation of the Stramit® Fascia Batten is simple and straightforward. Using No.7 – 16x25mm bugle head needle point screws for timber or No.10x16mm hex head self-drilling and threading screws for steel, place behind fascia and stagger fasteners to roof trusses or rafters as shown in the diagrams. Two fasteners are to be used at the start and end of each batten length and are to be lip fixed only. The batten can be used at a maximum span of 600mm.

For the alternative fastener location at internal supports use No.7 – 16x40mm bugle head needle point screws for timber and No.12x45mm hex head self-drilling and threading screws for steel.

Please note that the use of nails for fixing is not adequate.

Note: Other Stramit® battens of larger dimensions may also be used to fulfill the same function. The same fixing screws and arrangement is required. For example Stramit® Roof Batten (40mm high) may be used in the dual role of fascia batten and tilt batten for roof tiles.

For further information please contact your local Stramit office or alternatively visit the Stramit website www.stramit.com.au

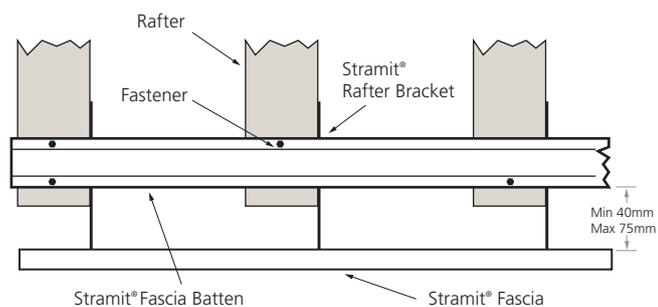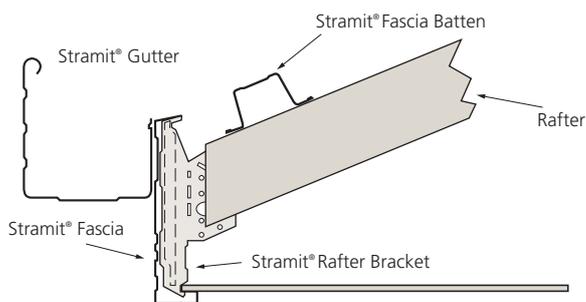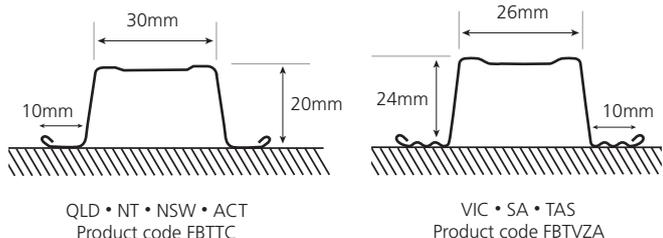

Alternative fastener location at internal supports

